
试样
2026.03.20
B00


版权所有·侵权必究


外部公开


Amendment	Description

Unit: mm

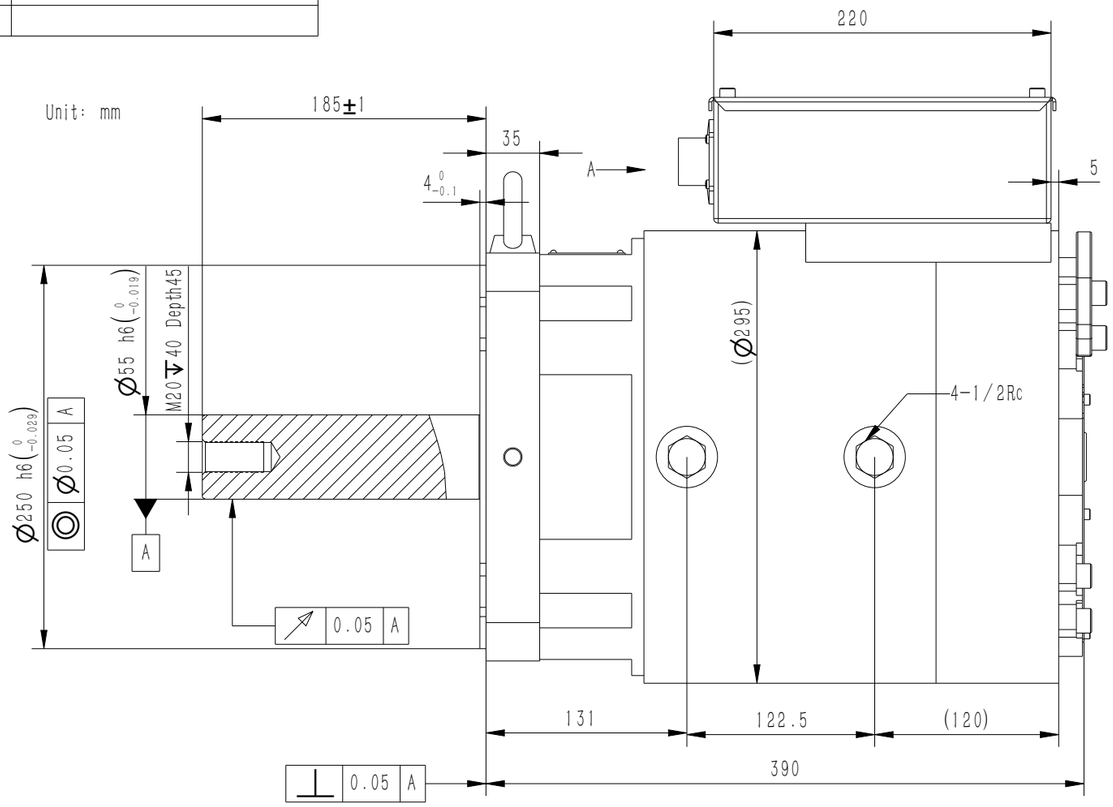

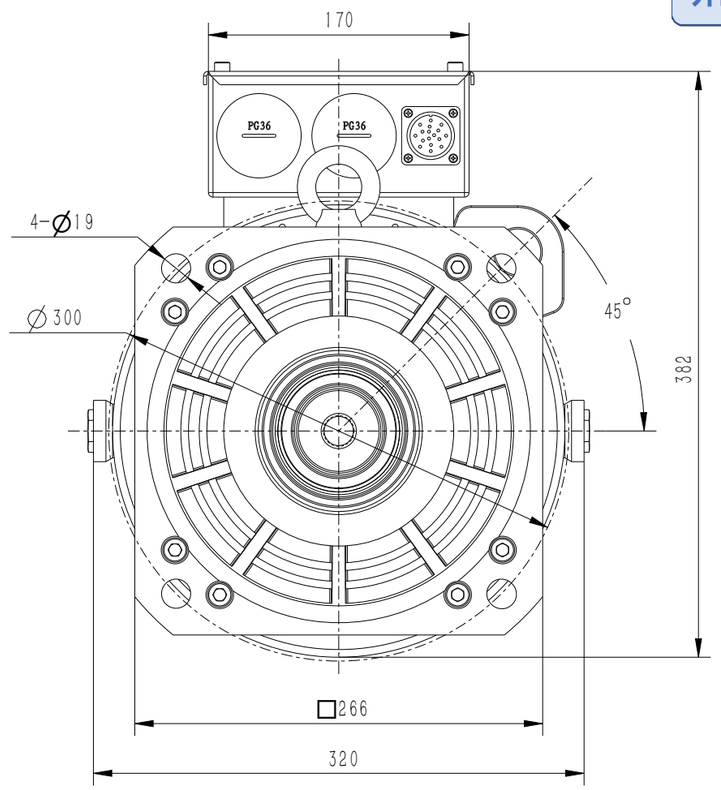


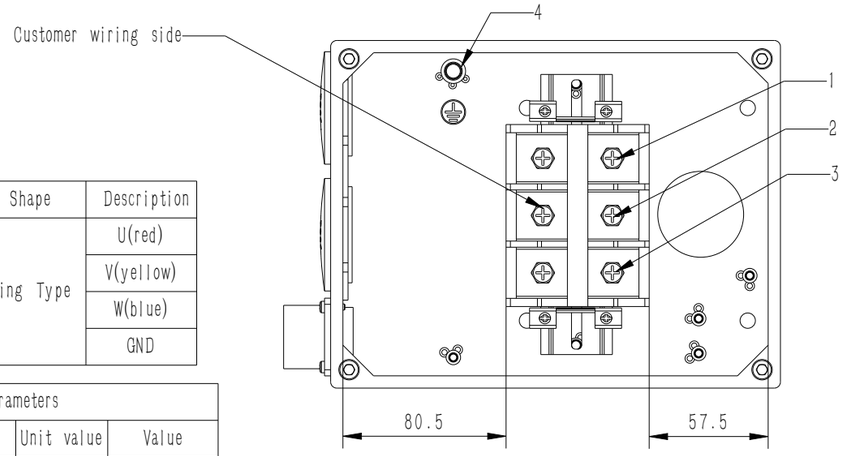

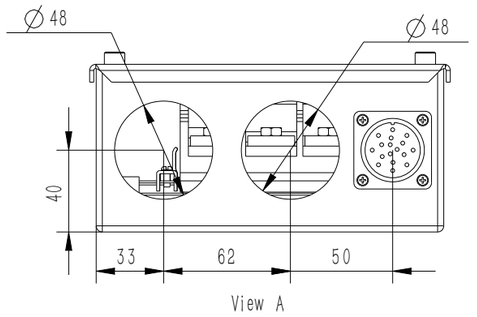


Nr	Specifications	Shape	Description
1	M8	Ring Type	U(red)
2	M8		V(yellow)
3	M8		W(blue)
4	M8		GND

Service life	
Radial load (N)	Axial load (N)
Fr	Fa
2828	537



Motor parameters			
Type		Unit value	Value
Work schedule		S1	
Rated torque	Mdn	Nm	200Nm
Rated current	Idn	A	68.5A
Rated power	Pdn	Kw	31.4Kw
Rated speed	nM	rpm	1500rpm
Rated frequency	F	Hz	100Hz
Peak torque	Mmax	Nm	400Nm
Peak current	Imax	A	152A
Maximum speed	nmax	rpm	2500rpm
Rated voltage	Vn	V	380V
Rated efficiency	η	%	93.8%
Moment of inertia		$kg*cm^2$	$296kg*cm^2$

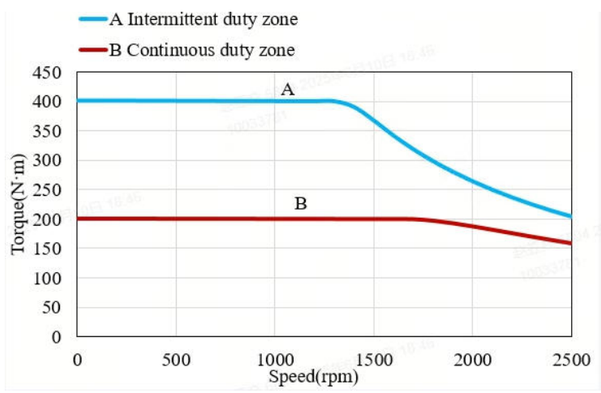

Name	Definition of wiring for absolute value encoders							PTC、KTY		
Definition	PS+ Yellow	PS- Yellow black	VB Battery+ Blue	VB Battery- Blue black	+5V Red	GND Black	Shielding layer	PTC+ Blue	PTC-、KTY+ Blue White	KTY- Green
17PAviation connecto	A	B	E	F	G	H	J	K	L	M

B00	New Archive	龚寅	20260320	Motor Outline Drawing	0111AW93-WX	
Version	Change method	Changed by	Date			
Design	龚寅			/	Mark	INOVANCE
Check	何亮					
Craft	孟沙					
Verify	姚铜佳			Weight	Scale	Version
Standardization	朱秋萍			157kg	1:4	B00
Approve	王凡					

Page 1 Of 1

Model: MEG26-20B15CD-A3B1L-DY-INT

苏州汇川技术有限公司