
B00
2026.05.13
正样


Amendment	Description


外部公开

Copyright: Copyright infringement reserved.


Unit: mm

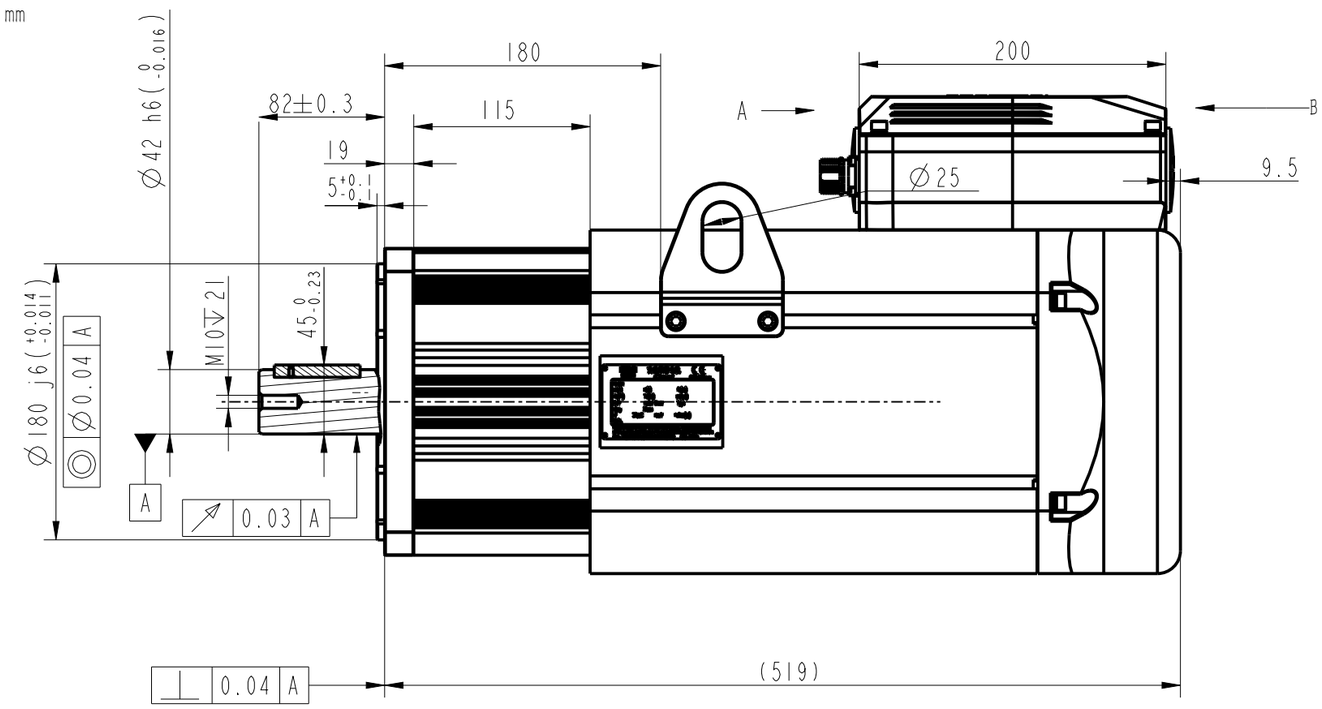

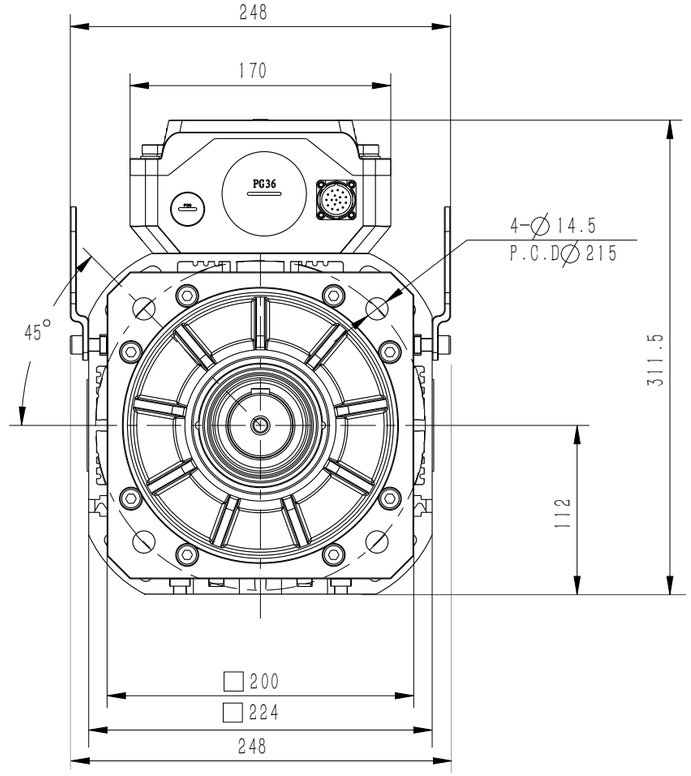





Standard accessories: A-type round head ordinary flat key
12x8x56 Refer to GB/T 1096

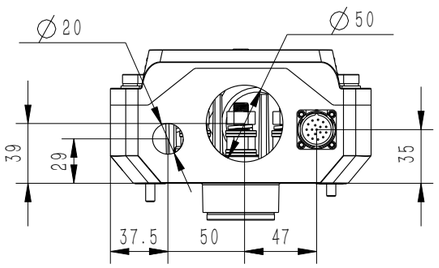


View A

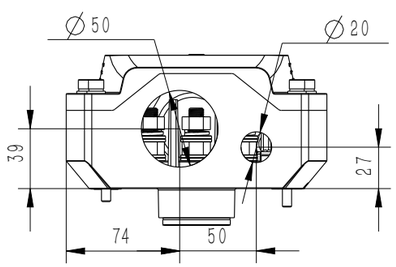

View B

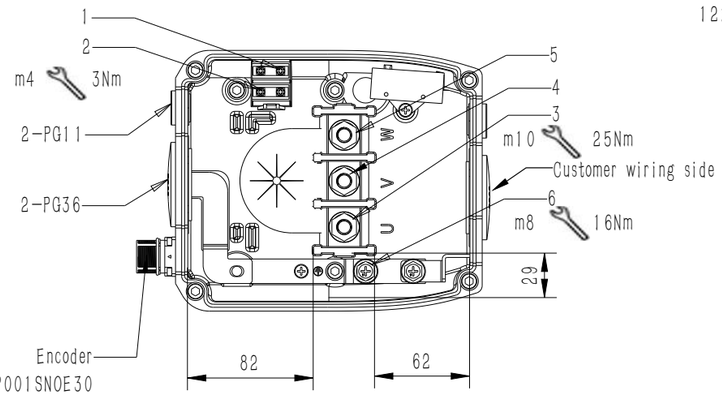


Service life	
Radial load (N)	Axial load (N)
Fr	Fa
1714	325



Nr	Specifications	Shape	Description
1	M4	Forked Type	Fan+
2	M4		Fan-
3	M10	Ring Type	U(red)
4	M10		V(yellow)
5	M10		W(blue)
6	M8		GND

Name	Definition of wiring for absolute value encoders							PT1000		
Definition	PS+ Yellow	PS- Yellow black	VB Battery+ Blue	VB Battery- Blue black	+5V Red	GND Black	Shielding layer	PT1000- White	PT1000+ Red	
17P Aviation connector	10	7	5	6	16	9	15	4	14	



				Motor Outline Drawing	0111B487-WX	
B00	New Archive	/	20260513			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			68.2kg	1:4	B00
Approve	/					
					Page 1 Of 2	
					Model	MEG20-35D20CD-A3A1F-CEN

INOVANCE

A3


B00
2026.05.13
正样

Copyright: Copyright infringement reserved.

Amendment	Description

外部公开

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	168
Rated Current	A	56.6
Peak Current	A	135
Rated Power	kW	35.2
Rated Speed	rpm	2000
Rate Frequency	Hz	133.33
Peak Torque	Nm	405
Max speed@380V	rpm	2650
Rated voltage	V	380
Rotor inertia	$kg \cdot cm^2$	215
Weight	kg	68.2
Stall Torque	Nm	201.6
Stall current	A	67.91
Duty	S1	

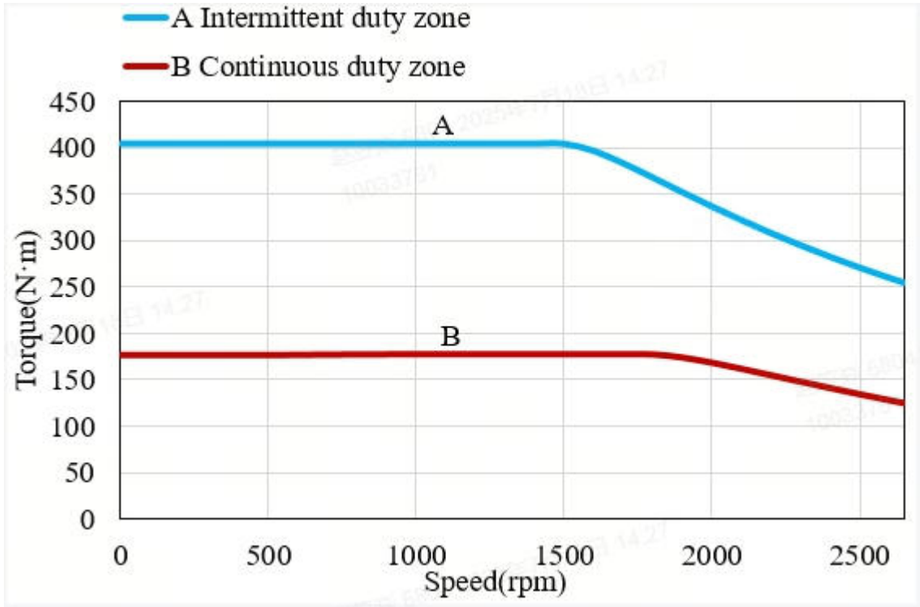

				Motor Outline Drawing	0111B487-WX	
B00	New Archive	/	20260513			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			68.2kg	1:4	B00
Approve	/					

Page 2 Of 2

Model: MEG20-35D20CD-A3A1F-CEN

INOVANCE

A3