
正样
2025.09.29
B00


Amendment	Description

外部公开


Copyright:Copyright infingmengt reserved


Unit: Millimeter (mm)

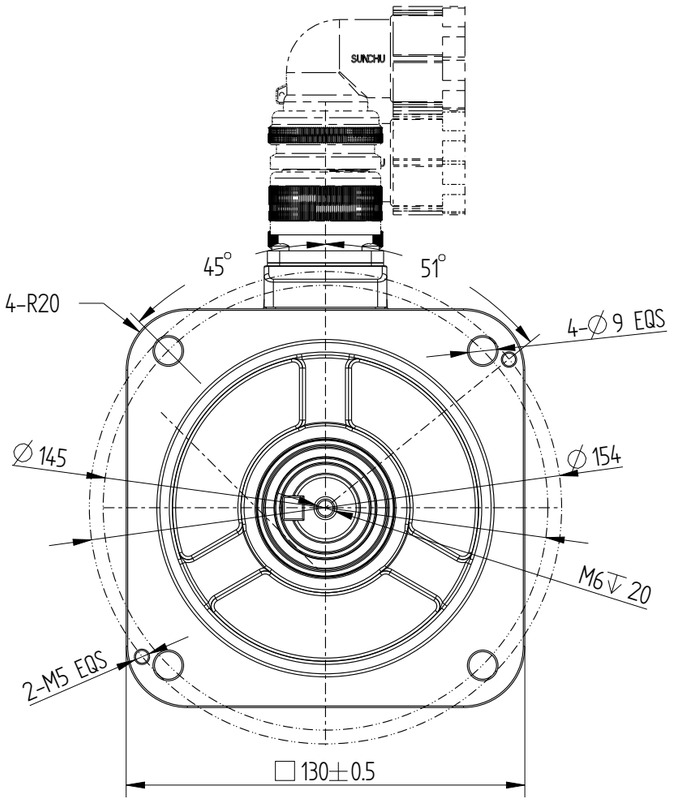

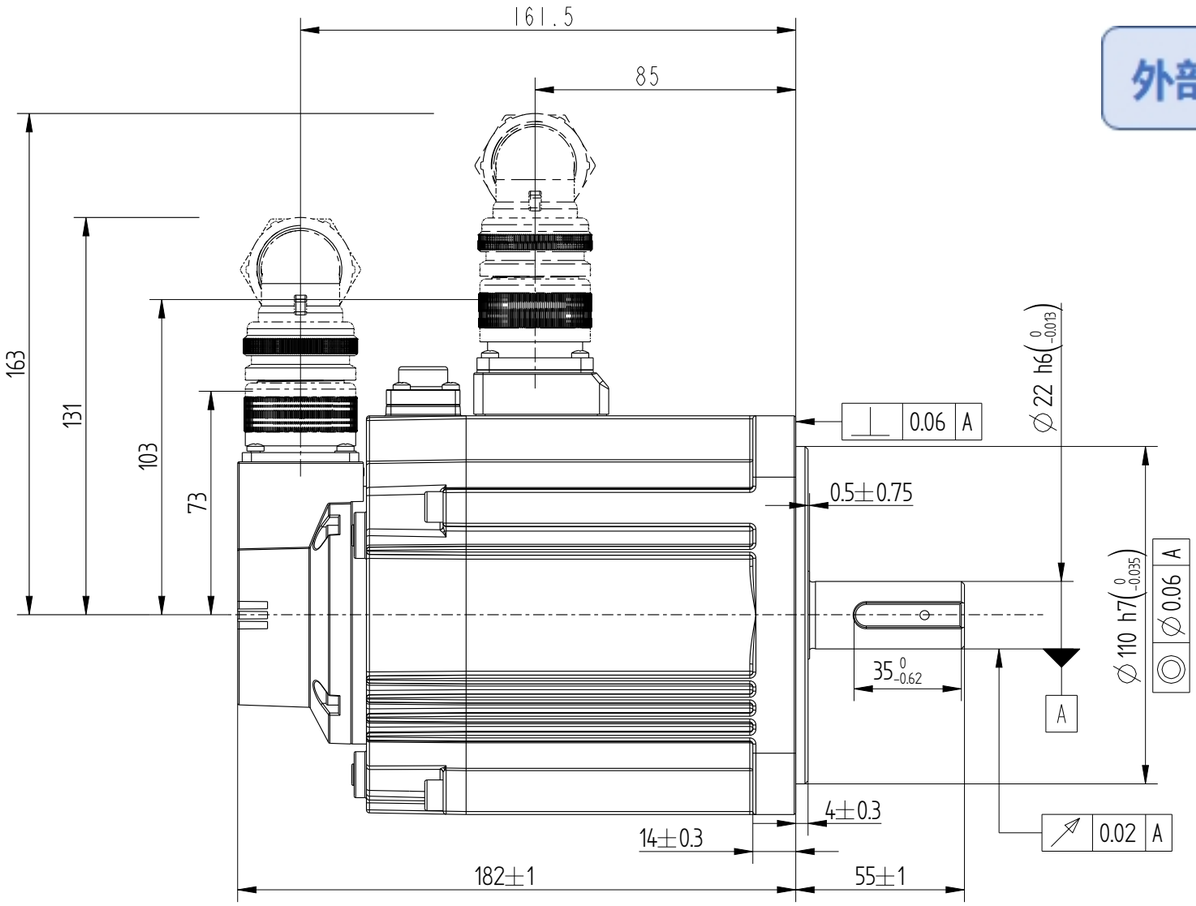


Basic function parameters	
Rated power kW	1.3
Rated voltage V	220
Rated current A	10.5
Peak current at rated speed A	27.3
Rated torque Nm	8.34
Peak torque at rated speed Nm	20.85
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg · cm^2	21.5±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾16
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

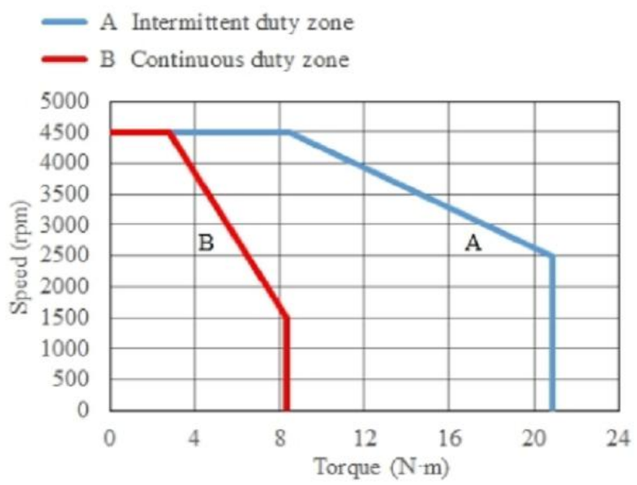




Dimension of shaft end



Dimension of shaft end with



				Motor outline Drawing	0111B767-WX
B00	Replace	/	/		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
stangardization	/			8.9kg / 1:2 / B00	Model: MS1H3-13C15CB-V334R-INT
Approve	/				

INOVANCE