

正样
2025.09.30
Copyright: Copyright infringement reserved

Amendment	Description


Unit: Millimeter (mm)


外部公开

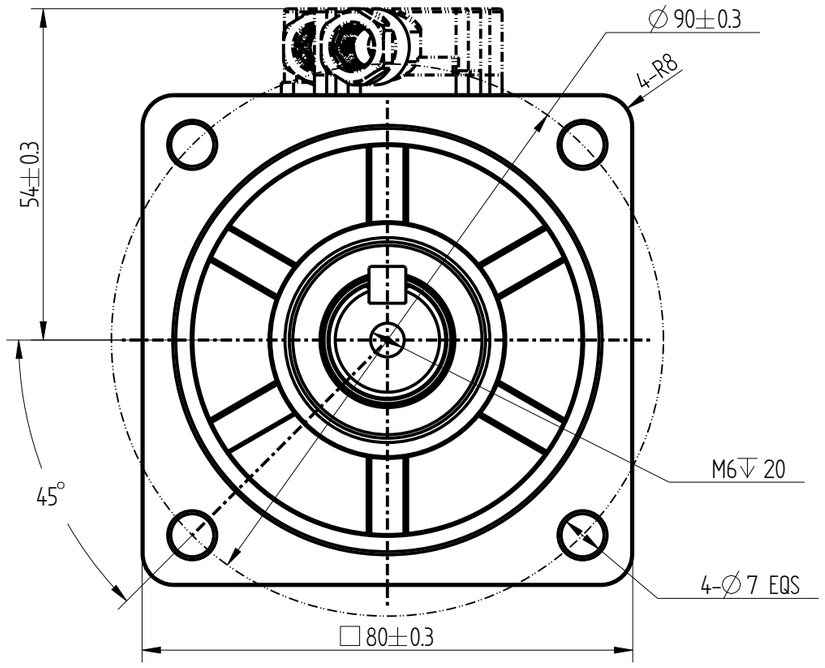

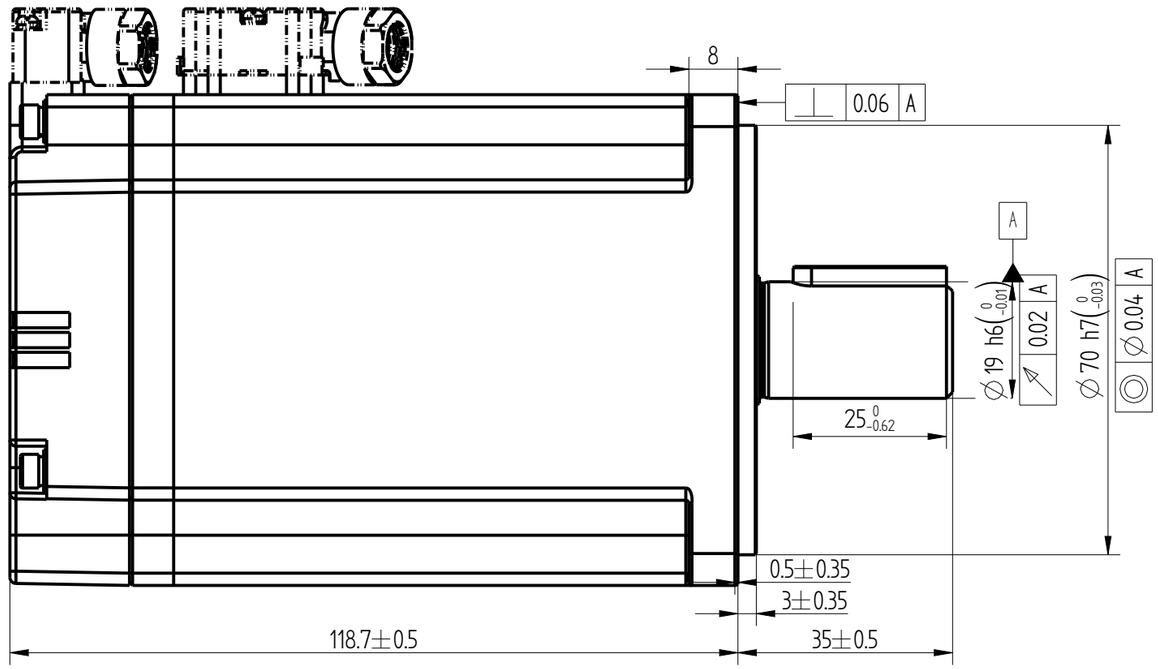


Basic function parameters	
Rated power KW	1
Rated voltage V	220
Rated current A	6.5
Peak current at rated speed A	24
Rated torque Nm	3.18
Peak torque at rated speed Nm	11.13
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.87±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Brake backlash	/
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

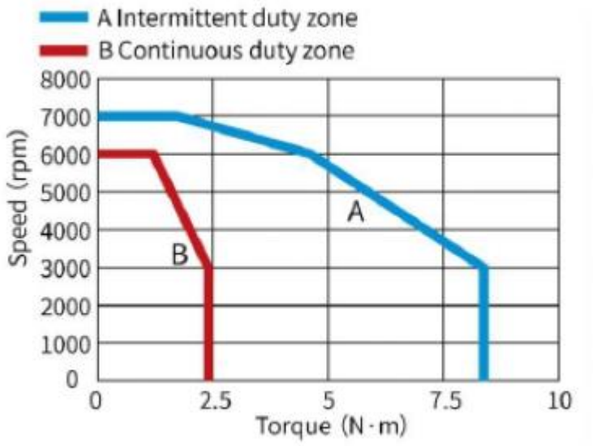




Dimension of shaft end



Dimension of shaft end with key

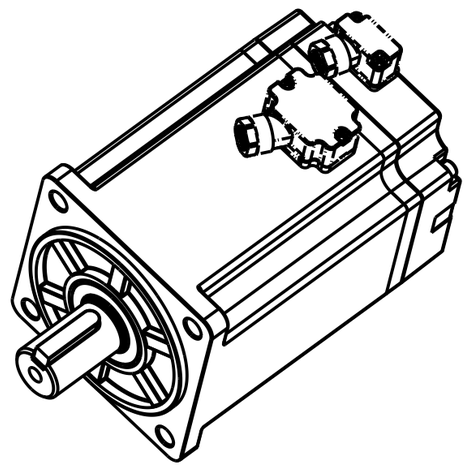

				Motor Outline Drawing	0111B774-WX	
B00	New Archive	/	20250926			
Version	Change method	Changed by	Date			
Design	/				Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			2.55kg	1:1	B00	Model	MS1H4-10C30CB-V331R-INT
Approve	/					

INOVANCE

A3