

正样
2025.09.29
B00

Copyright:Copyright infingmengt reserved

Amendment	Description


Unit: Millimeter (mm)

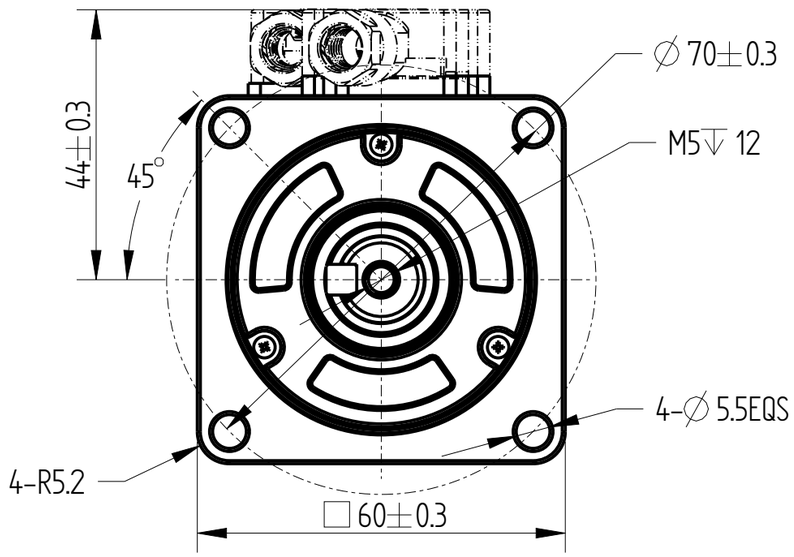


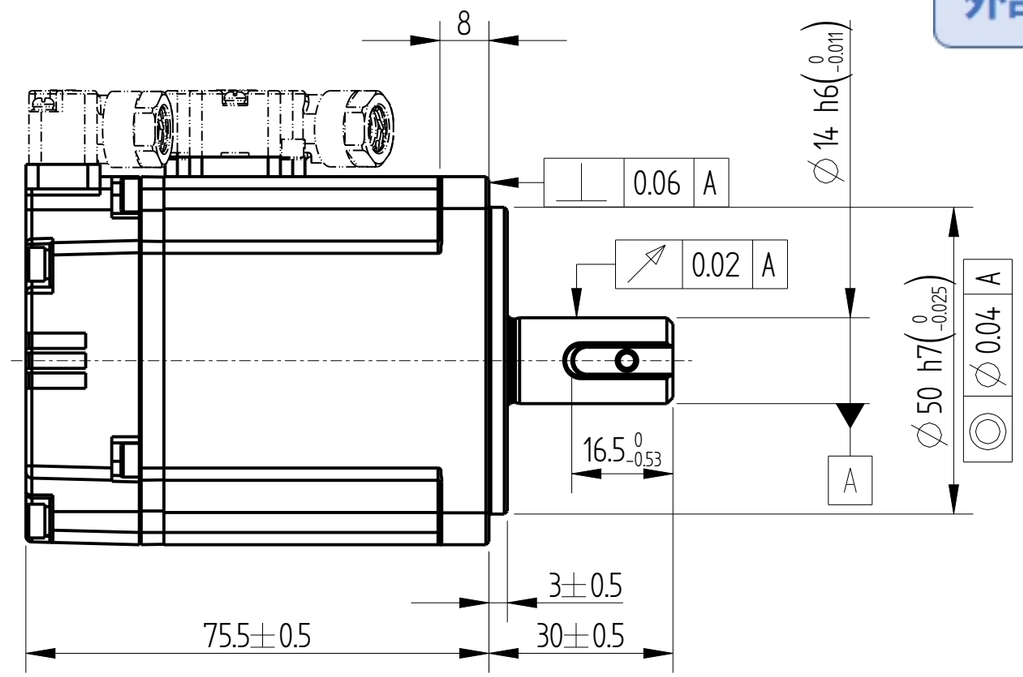


外部公开

Basic function parameters	
Rated power kW	0.2
Rated voltage V	220
Rated current A	1.5
Peak current at rated speed A	5.8
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm^2	0.094±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection class	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤245
Axial load N	≤74

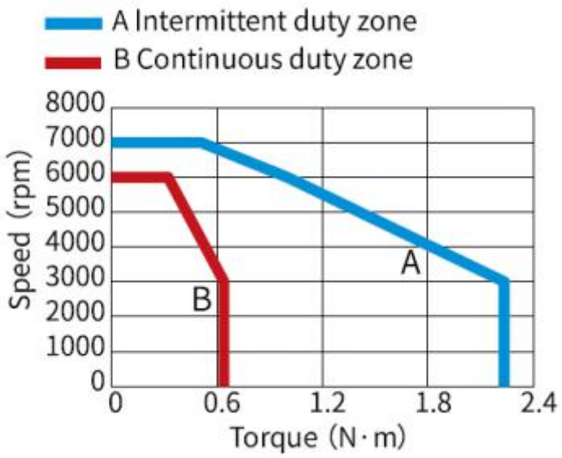


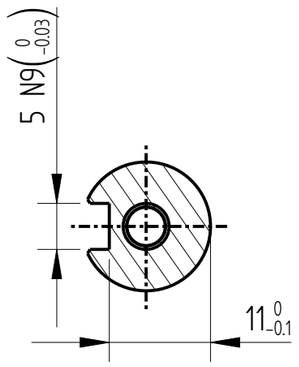

Dimension of shaft end

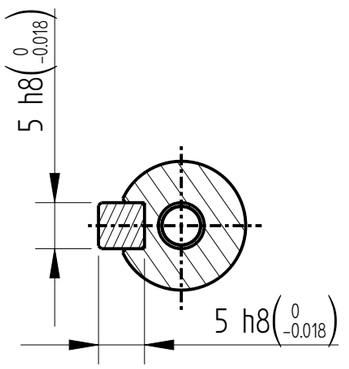

Dimension of shaft end with key

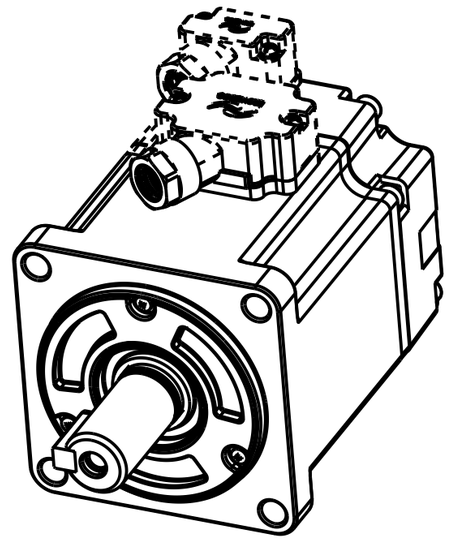

				Motor Outline Drawing	0111B971-WX	
B00	Replace	/	20250924			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			0.8kg	1:1	B00
Approve	/					

Page 1 of 1

Model MS1H1-20B30CB-V331R-INT

INOVANCE

A3