

正样
2025.09.29
B00

| Amendment | Description |
|---|---|
| | |


外部公开


Unit: Millimeter (mm)

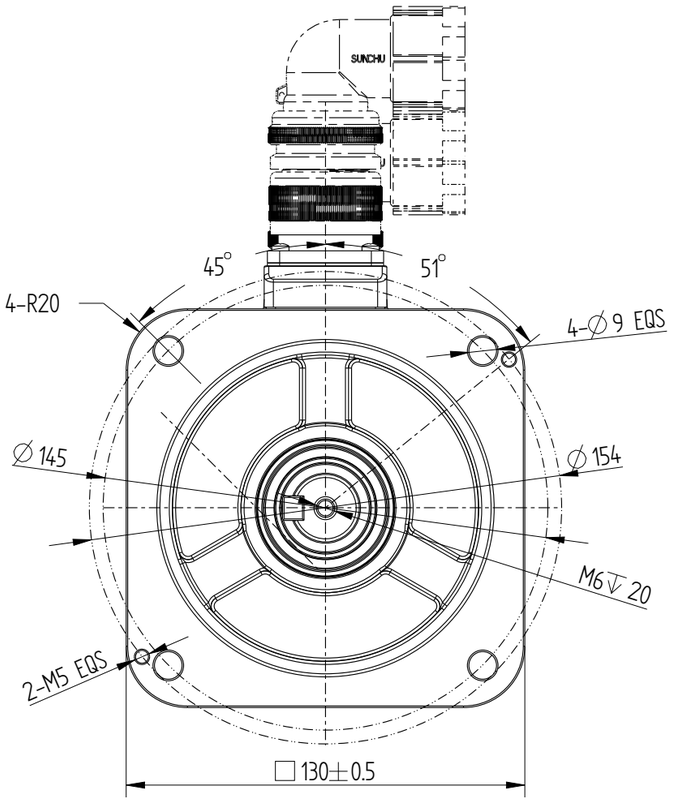

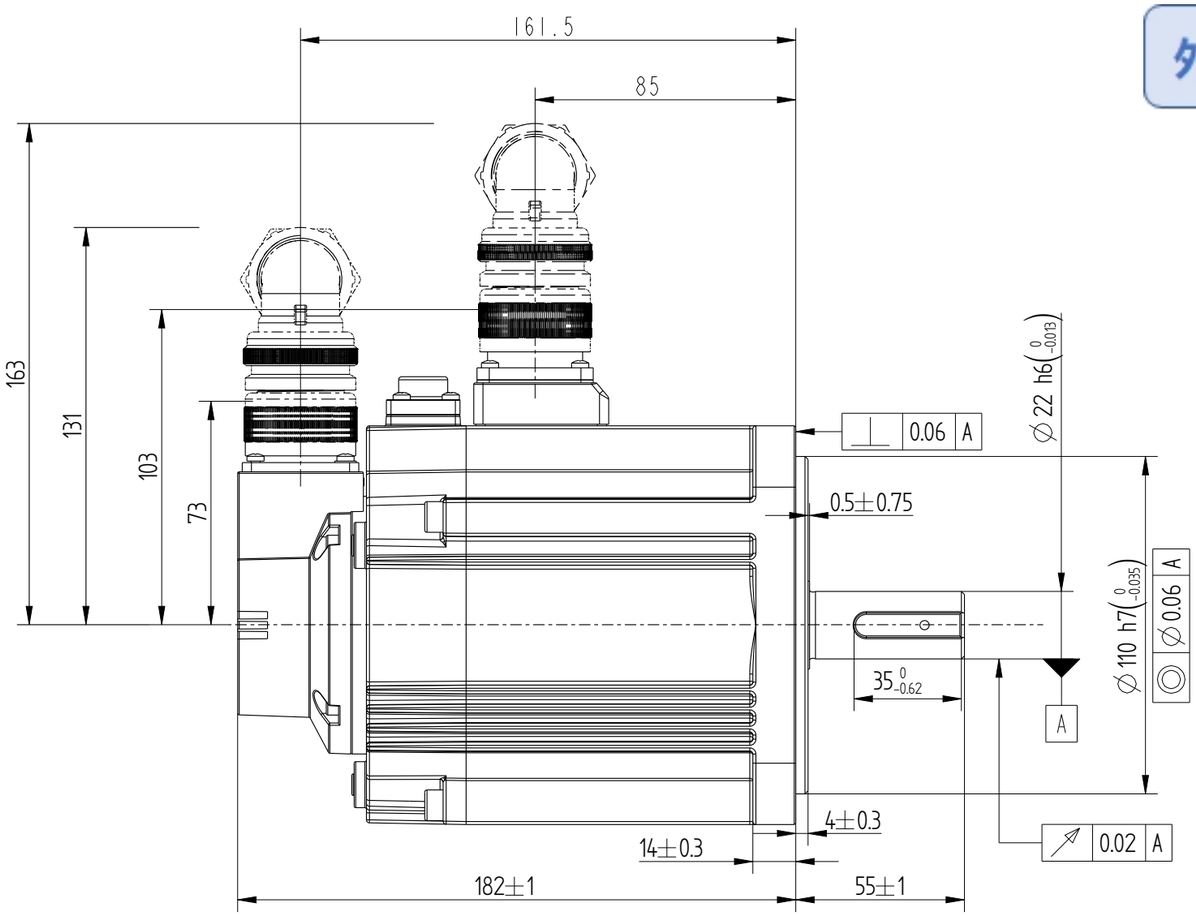


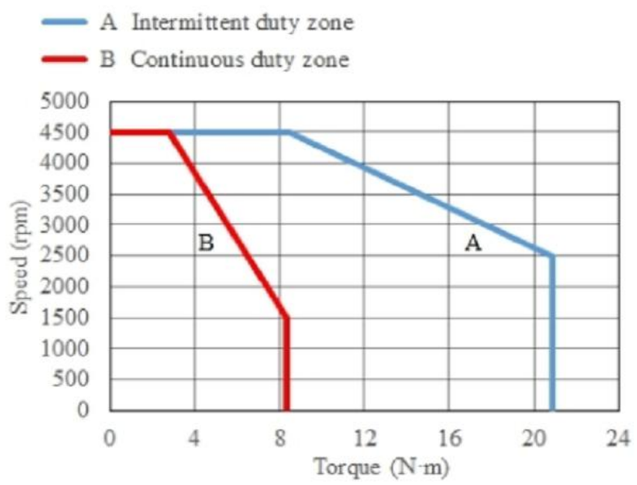

| Basic function parameters | |
|---|---|
| Rated power kW | 1.3 |
| Rated voltage V | 220 |
| Rated current A | 10.5 |
| Peak current at rated speed A | 27.3 |
| Rated torque Nm | 8.34 |
| Peak torque at rated speed Nm | 20.85 |
| Rated speed rpm | 1500 |
| Max speed rpm | 4500 |
| Rotor inertia kg · $cm^2$ | 21.5±10% |
| Encoder resolution | 26bit |
| Insulation class | F(155) |
| Protection level | IP67 |
| Static torque of brake Nm | ⩾16 |
| Brake power supply V | DC24±10% |
| Brake backlash° | ⩽1 |
| Duty cycle | S1 |
| Radial load N | ⩽686 |
| Axial load N | ⩽196 |





Dimension of shaft end




Dimension of shaft end with



| | | | | Motor outline Drawing | 0111B982-WX |
|---|---|---|---|---|---|
| B00 | Replace | / | / | | |
| Version | Change method | Changed by | Date | | |
| Design | / | | | / | Mark |
| Check | / | | | | |
| Craft | / | | | | |
| Verify | / | | | Weight / Scale / Version | Page 1 of 1 |
| stangardization | / | | | 8.9kg / 1:2 / B00 | Model: MS1H3-13C15CB-V634R-INT |
| Approve | / | | | | |

INOVANCE

Copyright:Copyright infingmengt reserved