
正样
2025.09.29
B00


Copyright:Copyright infingmengt reseved


Amendment	Description

Unit: Millimeter (mm)


外部公开

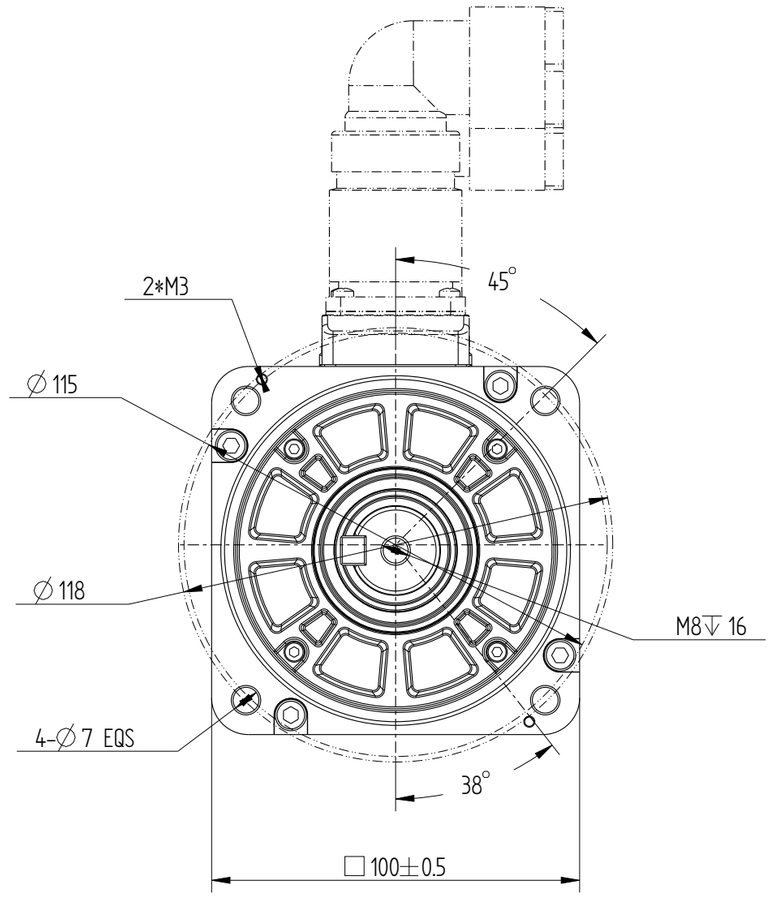

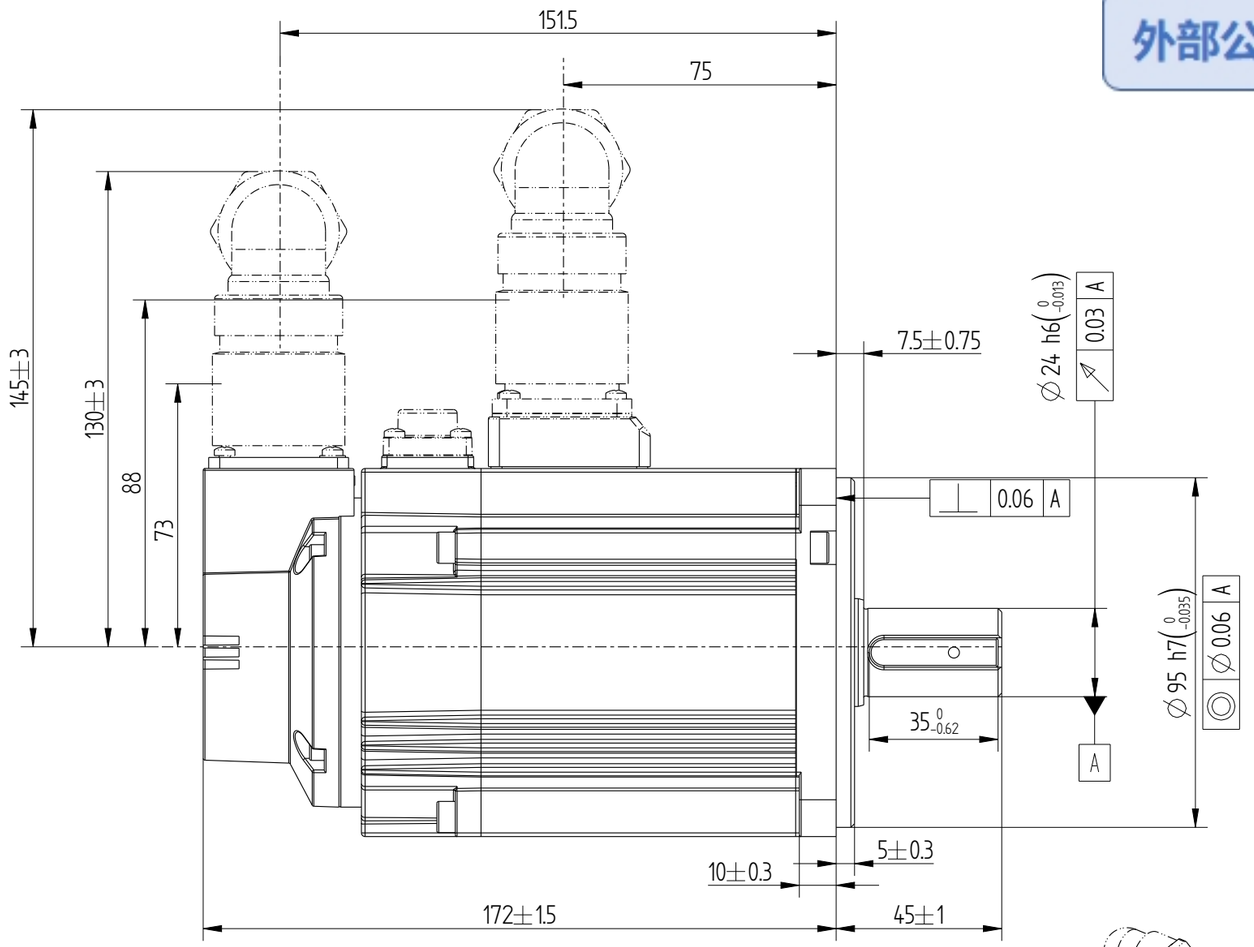





Dimension of shaft end



Dimension of shaft end with key

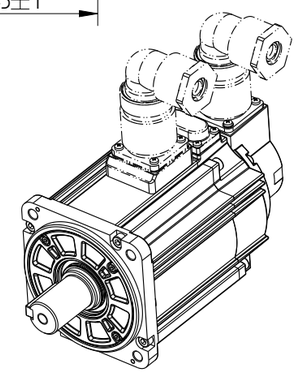

Basic function parameters	
Rated power KW	1.0
Rated voltage V	220
Rated current A	6.4
Peak current at rated speed A	23
Rated torque Nm	3.18
Peak torque at rated speed Nm	9.54
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm2	2.6±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾8
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

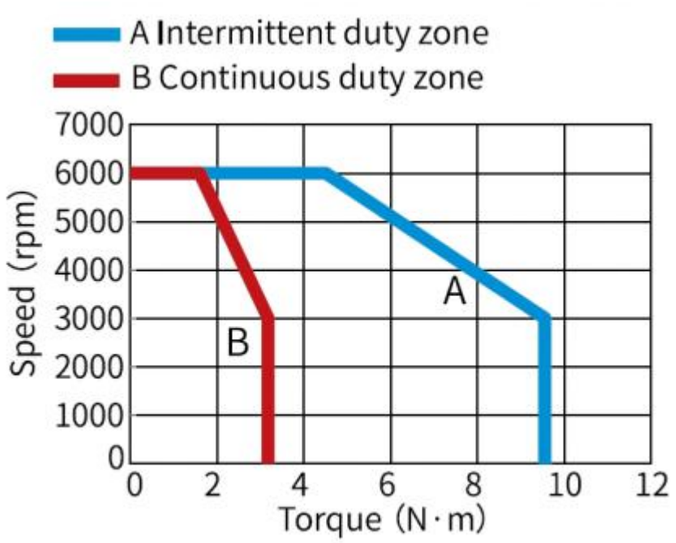

				Motor Outline Drawing	0111BA30-WX	
					Mark	INOVANCE
B00	Replace	/	/			
Version	Change method	Changed by	Date			
Design	/					
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			4.9kg	3:5	B00
Approve	/					

Page 1 of 1

Model MS1H2-10C30CB-V334R-INT

INOVANCE

A3