
正样
2025.09.29
B00


Amendment	Description

外部公开


Copyright:Copyright infingmengt reserved


Unit: Millimeter (mm)

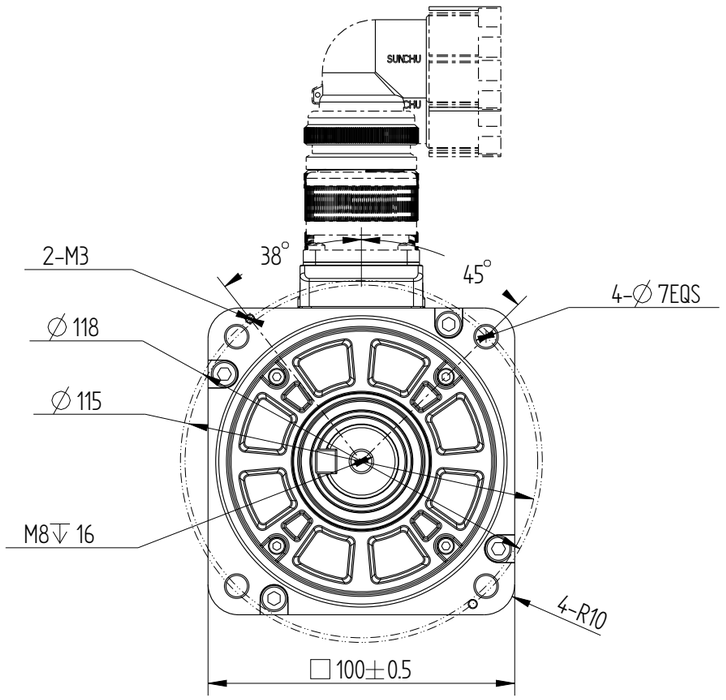

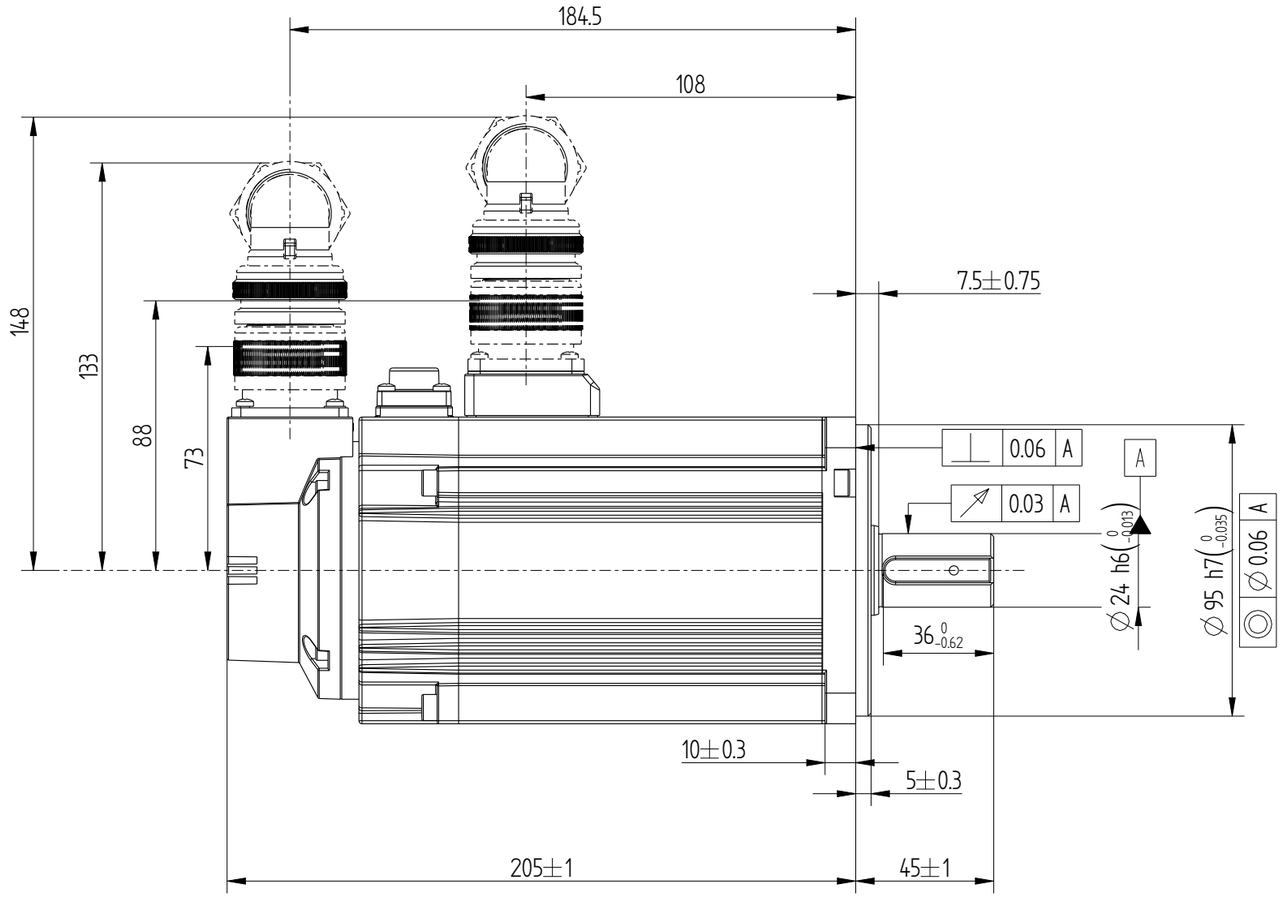


Basic function parameters	
Rated power kW	2.0
Rated voltage V	380
Rated current A	5.6
Peak current at rated speed A	20
Rated torque Nm	6.36
Peak torque at rated speed Nm	19.1
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	3.74±10%
Encoder resolution	23bit
insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾8
Brake power supply V	DC24±10%
Brake backlash°	⩽1
duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

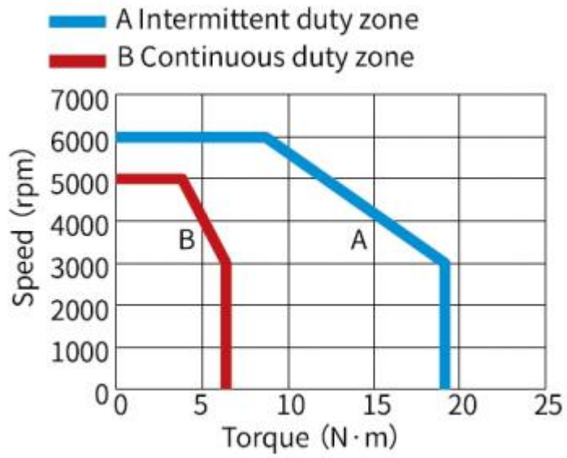




Dimension of shaft end



Dimension of shaft end with key

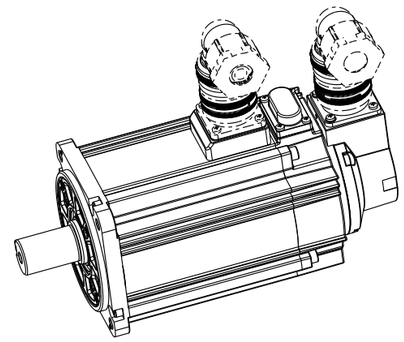

B00	Replace	/	/
Version	Change method	Change by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
standardization	/		
Approve	/		

Motor Outline Drawing			0111BA33-WX
/			Mark / INOVANCE
Weight	Scale	Version	Page 1 of 1
6.55kg	1:2	B00	Model MS1H2-20C30□-V334R-INT

INOVANCE

A3