

正样
2025.09.29
BOO

Copyright:Copyright infingmengt reserved

Amendment	Description


Unit: Millimeter (mm)

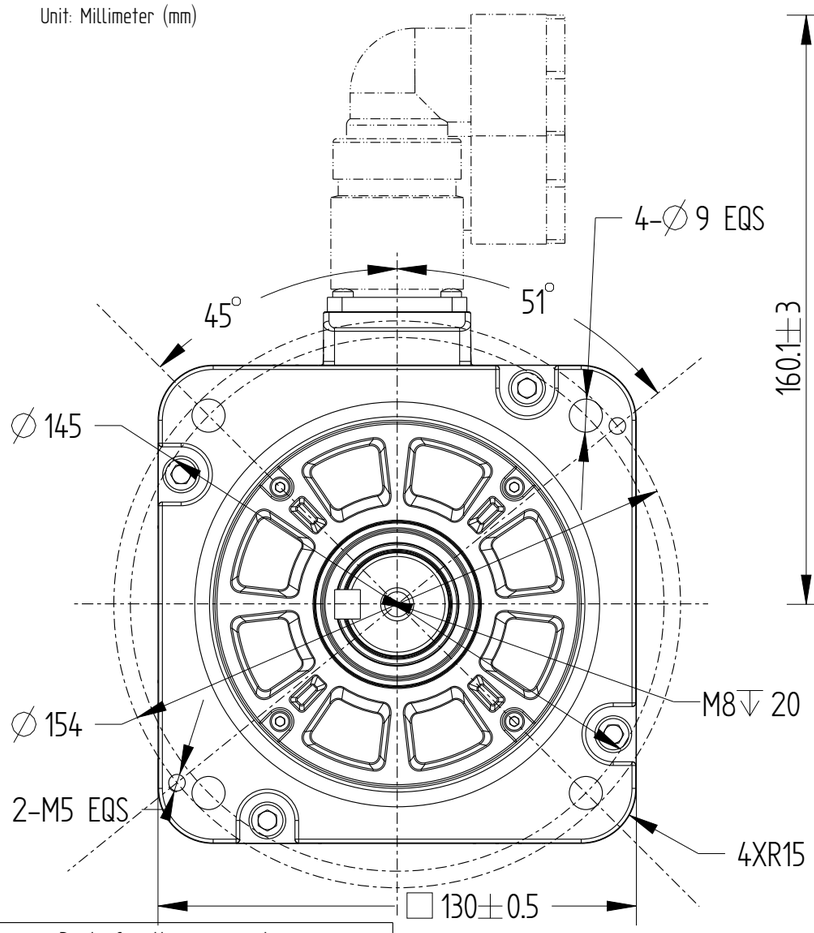


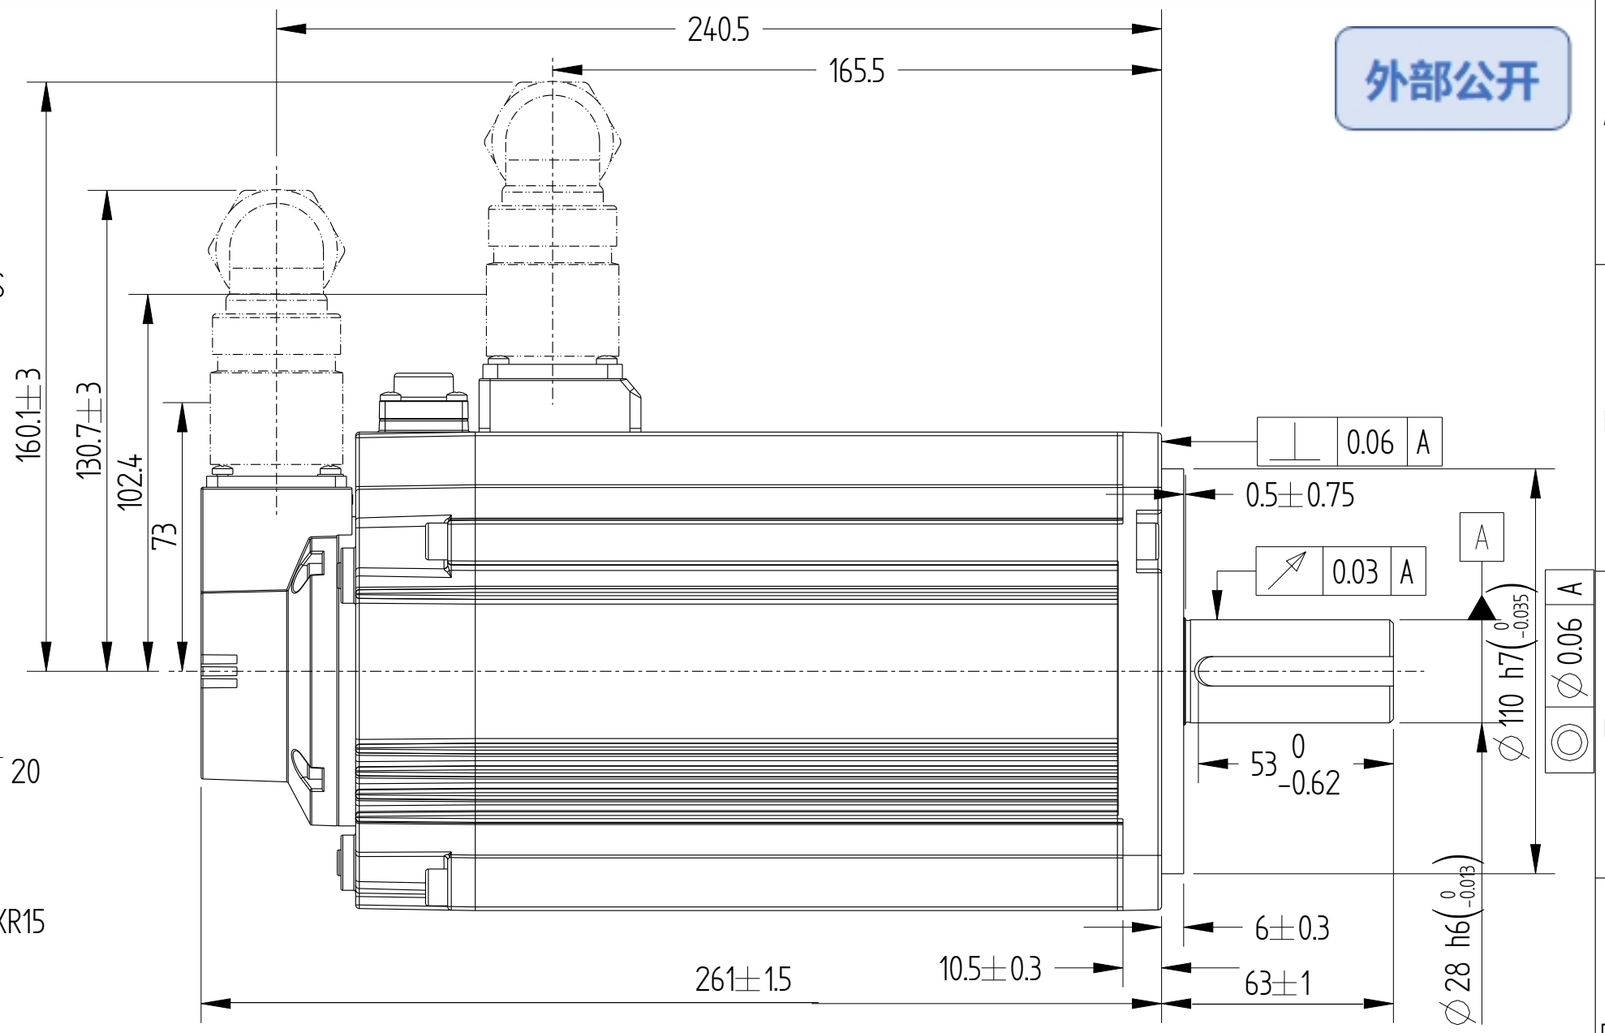

外部公开


Basic function parameters	
Rated power KW	4
Rated voltage V	220
Rated current A	22
Peak current at rated speed A	67.5
Rated torque Nm	12.6
Peak torque at rated speed Nm	31.5
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	11.98±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾16
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽1176
Axial load N	⩽392

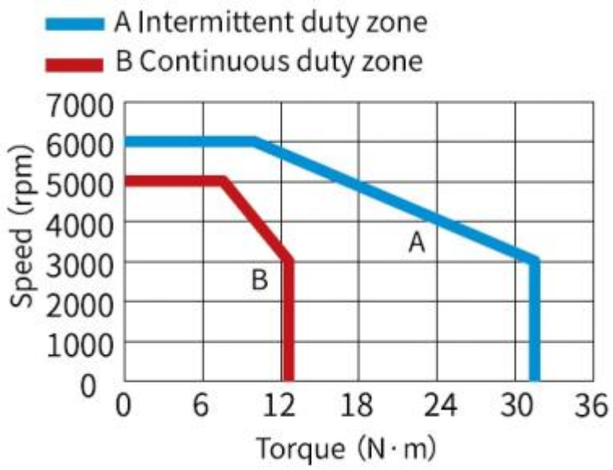

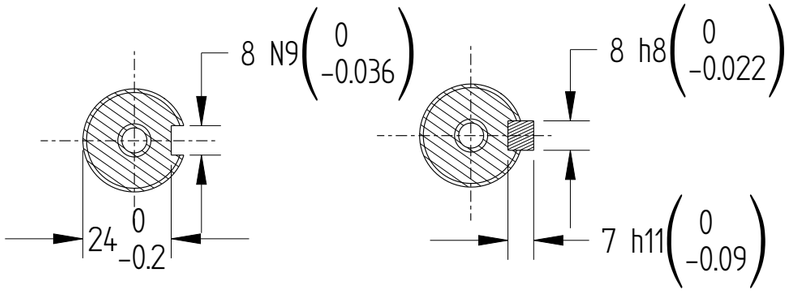

Dimension of shaft end

Dimension of shaft end with key

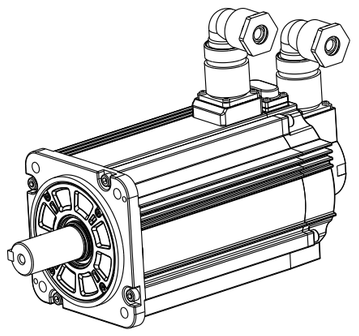

				Motor Outline Drawing	0111BA39-WX	
B00	New Archive	/	/			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			15.1kg	3:5	B00
Approve	/					

Page 1 of 1		
Model	MS1H2-40C30CB-V334R-INT	

INOVANCE

A3