
正样
2025.09.29
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

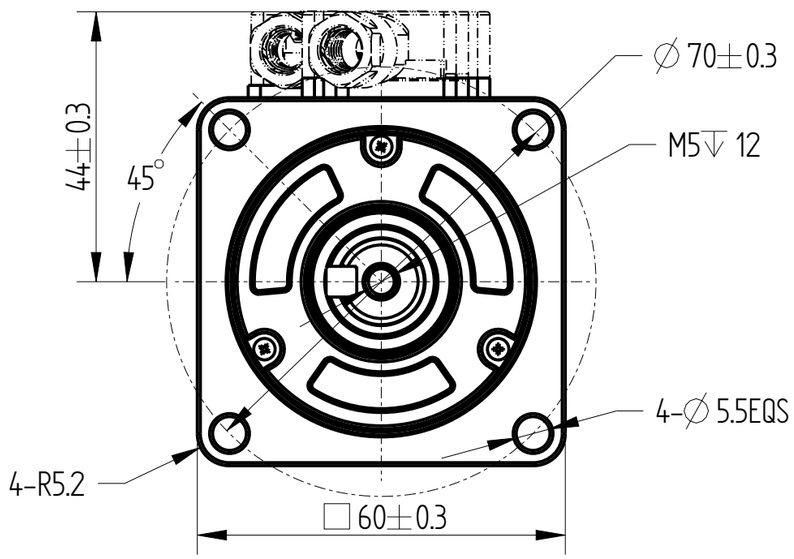

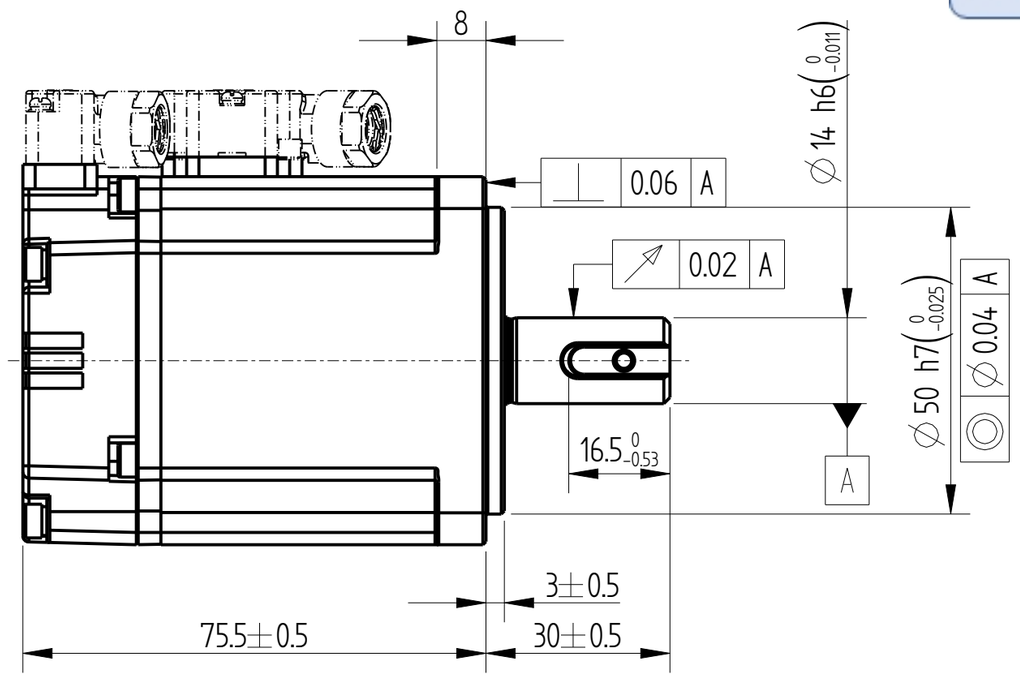


Basic function parameters	
Rated power kW	0.2
Rated voltage V	220
Rated current A	1.5
Peak current at rated speed A	5.3
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm²	0.094±10%
Encoder resolution	26bit
Insulation class	F(155)
Protection class	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤245
Axial load N	≤74

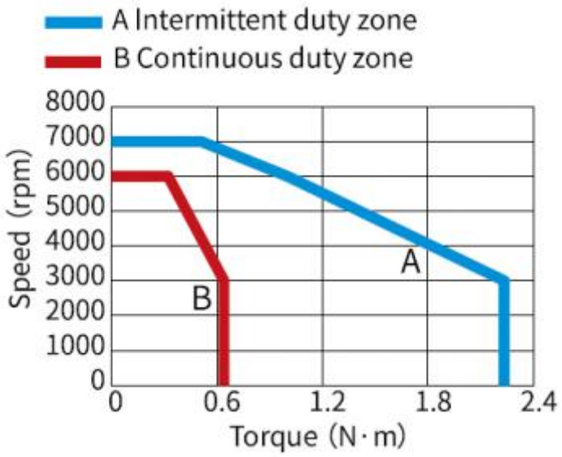


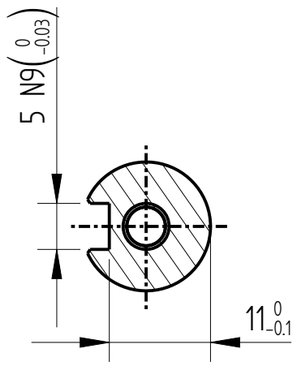

Dimension of shaft end

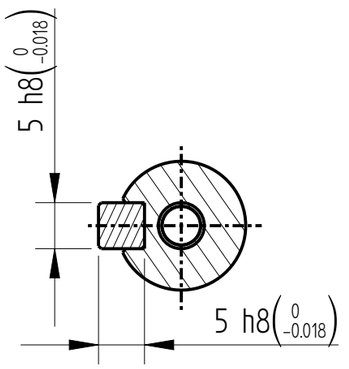

Dimension of shaft end with key

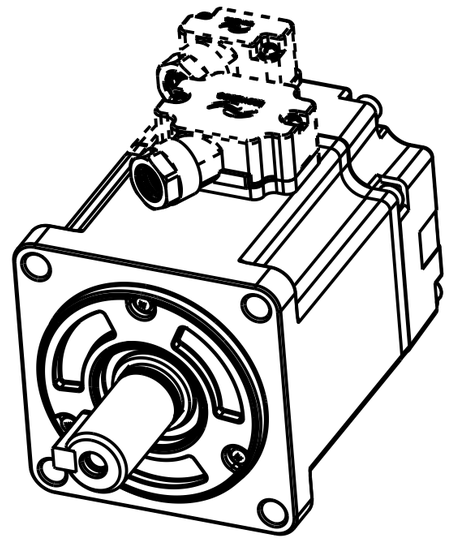

				Motor Outline Drawing		0111BA73-WX	
B00	Replace	/	20250924				
Version	Change method	Changed by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			0.8kg	1:1	B00	Model MS1H1-20B30CB-V631R-INT
Approve	/						

INOVANCE

A3