

正样
2025.09.29
B00

Amendment	Description


Unit: Millimeter (mm)


外部公开

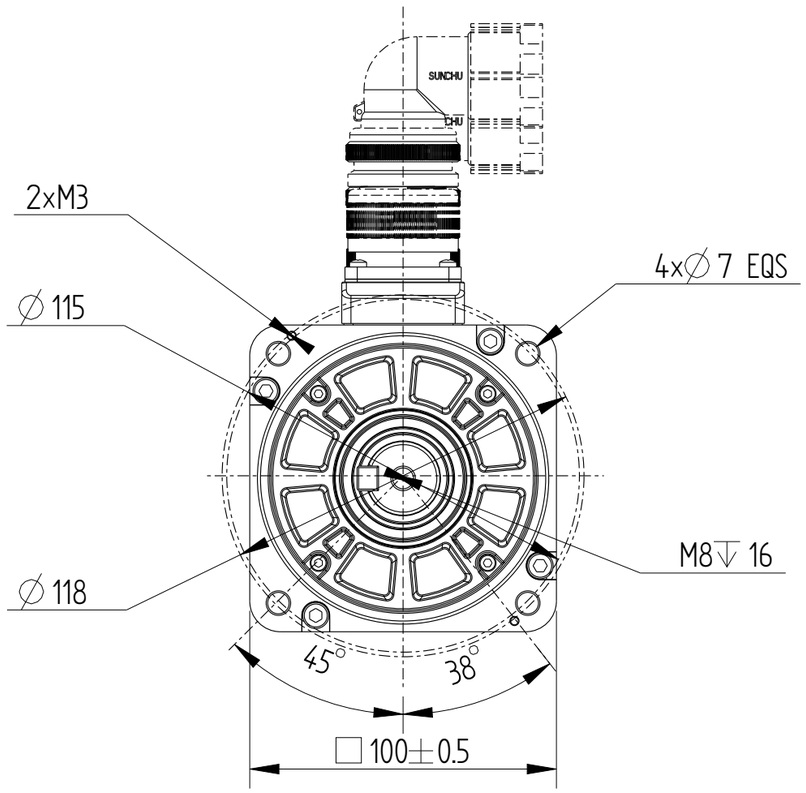

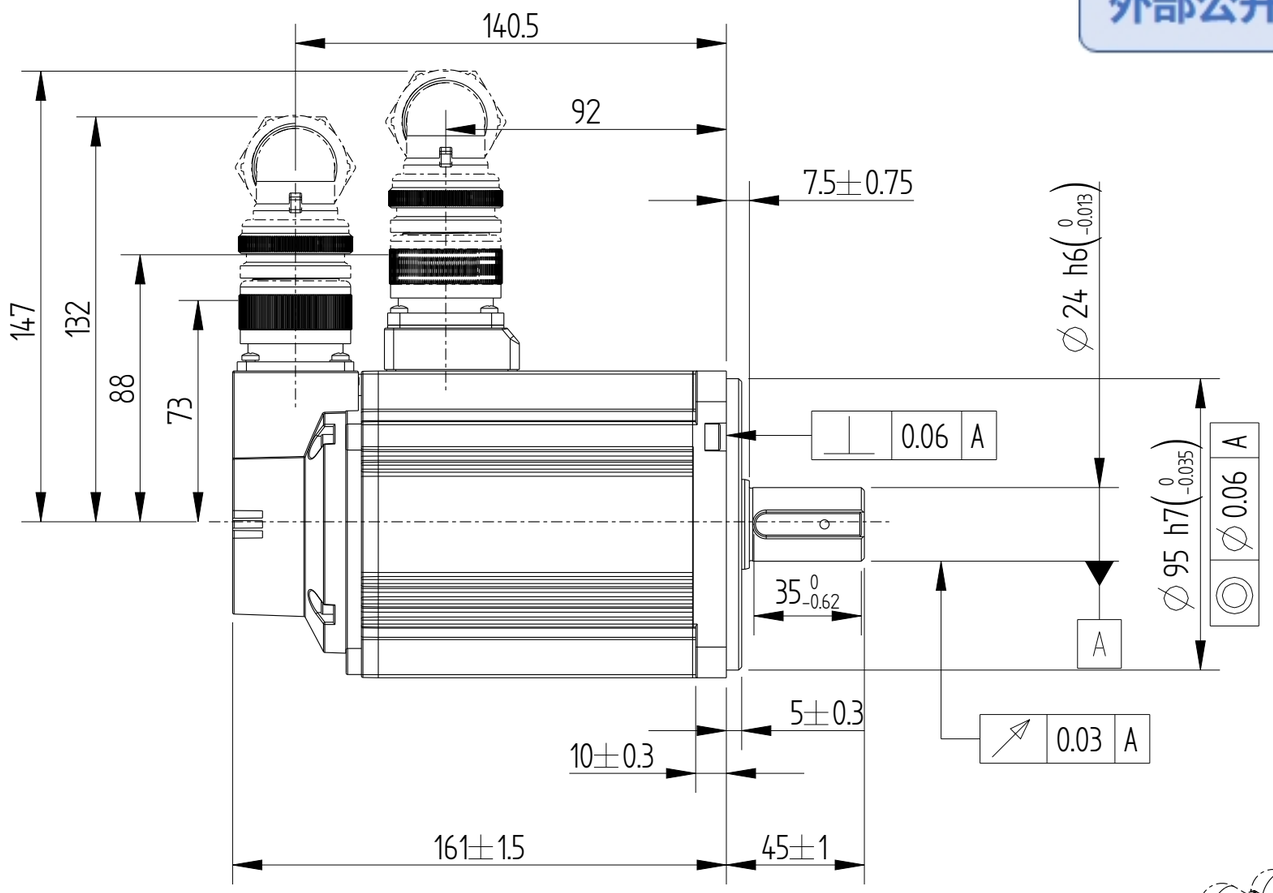


Basic function parameters	
Rated power KW	1.5
Rated voltage V	220
Rated current A	8.6
Peak current at rated speed A	32
Rated torque Nm	4.9
Peak torque at rated speed Nm	14.7
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	2.35±10%
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

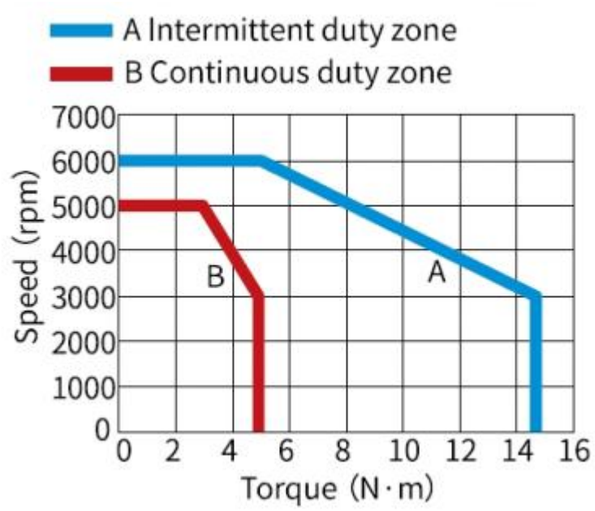


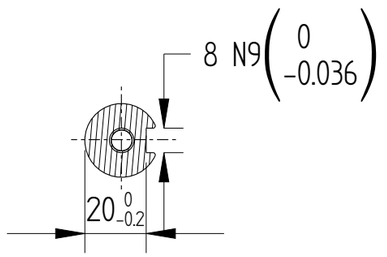

Dimension of shaft end

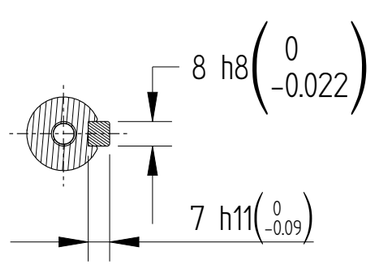

Dimension of shaft end with key

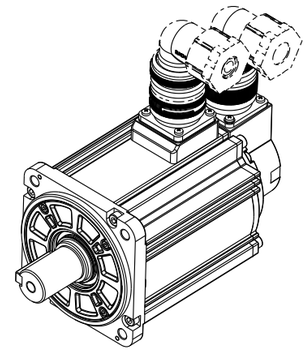

				Motor Outline Drawing	0111BA85-WX
B00	Replace	/	/		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				
Craft	/				
Verify	/			Weight	Scale / Version / Page 1 of 1
Standardization	/			4.65kg	1:2 / B00 / Model: MS1H2-15C30CB-V631R-INT
Approve	/				

INOVANCE

A3

Copyright:Copyright infingmengt reserved