
正样
2025.09.29
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


Unit: Millimeter (mm)


外部公开

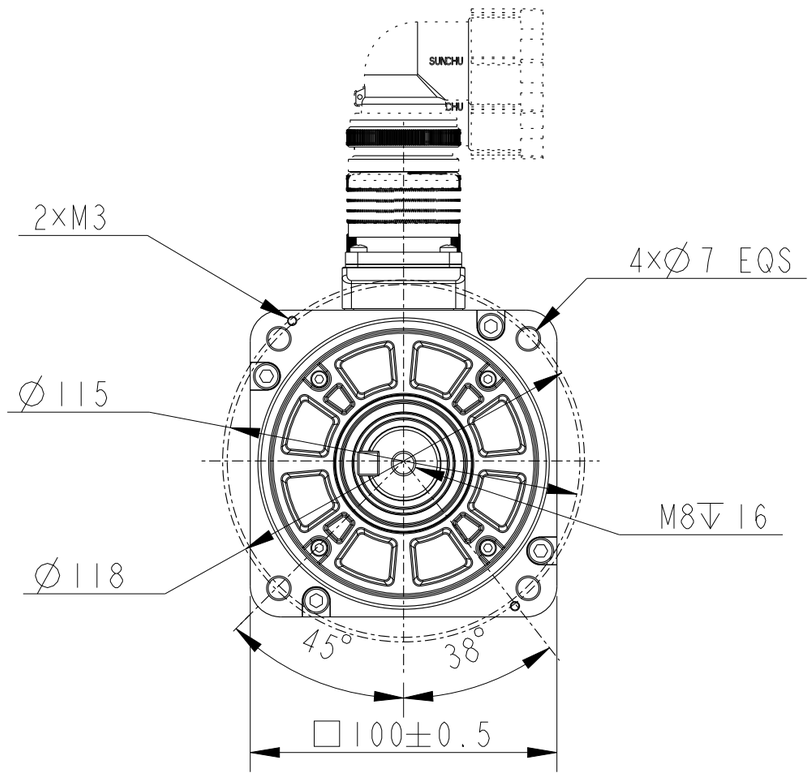

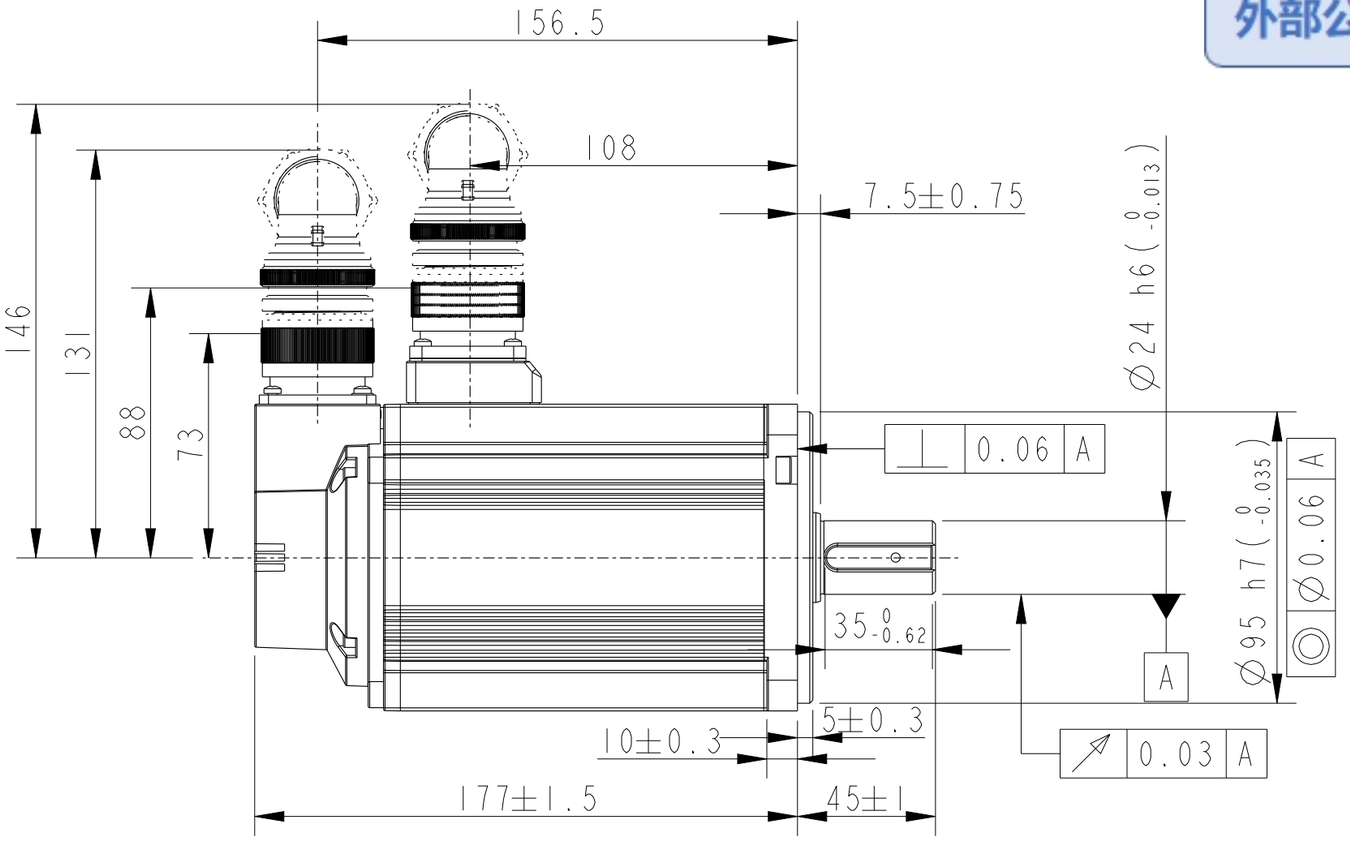


Basic function parameters	
Rated power KW	2
Rated voltage V	380
Rated current A	5.6
Peak current at rated speed A	20
Rated torque Nm	6.36
Peak torque at rated speed Nm	19.1
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	2.92±10%
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

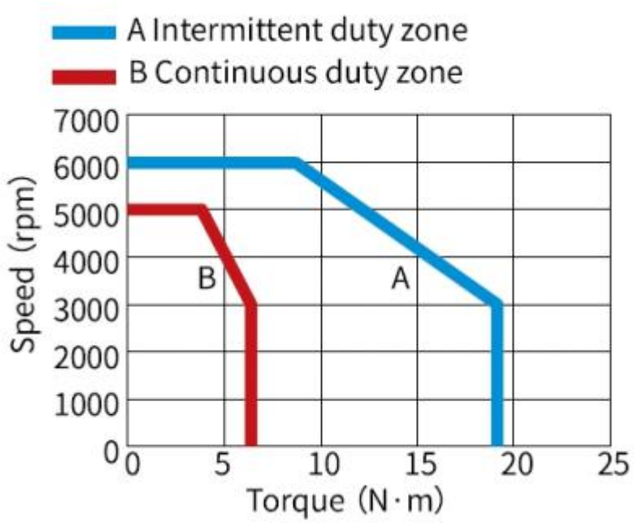


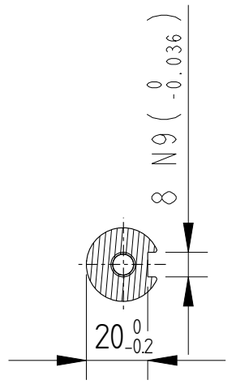

Dimension of shaft end

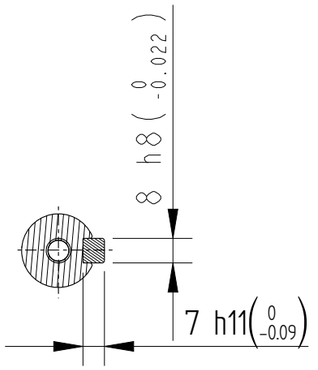

Dimension of shaft end with key

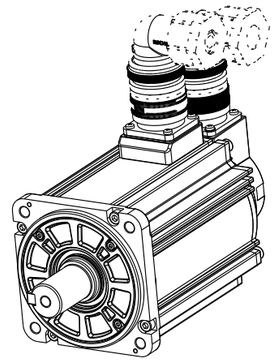

				Motor Outline Drawing	0111BA88-WX
B00	Replace	/	/		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				INOVANCE
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
Standardization	/			5.5kg / 1:2 / B00	Model MS1H2-20C30CD-V631R-INT
Approve	/				

INOVANCE

A3