
正样
2025.09.29
B00


Copyright:Copyright infingmengt reseved


Amendment	Description

外部公开


Unit:Millimeter(mm)

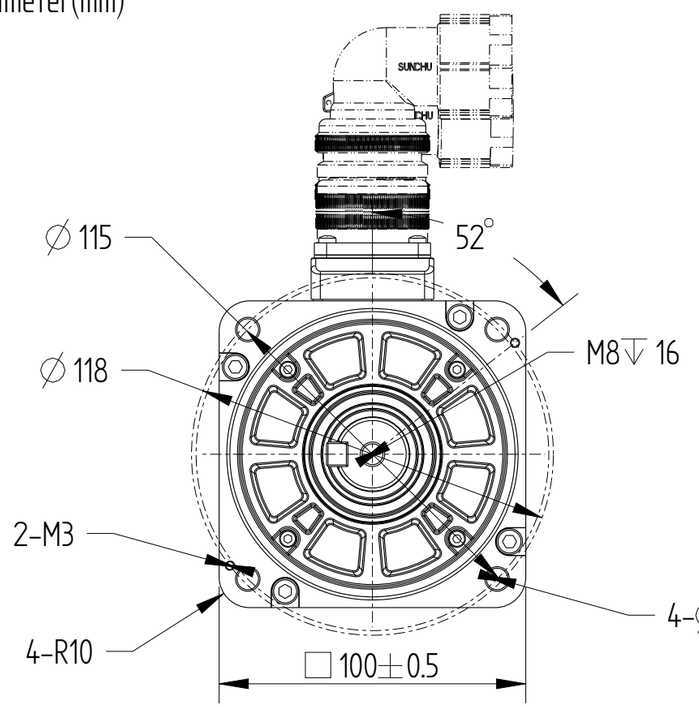

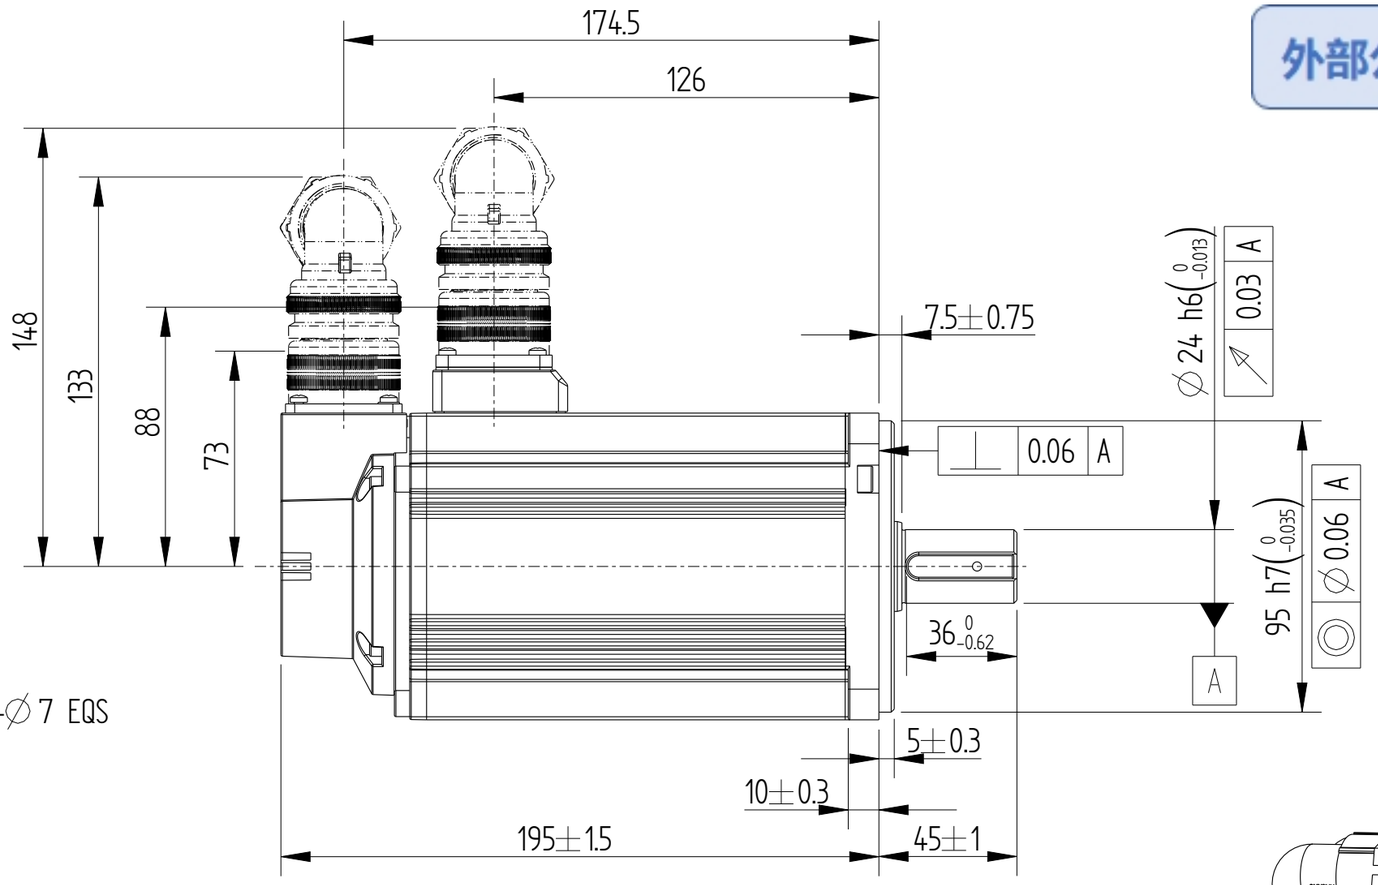





Dimension of shaft end



Dimension of shaft end with key

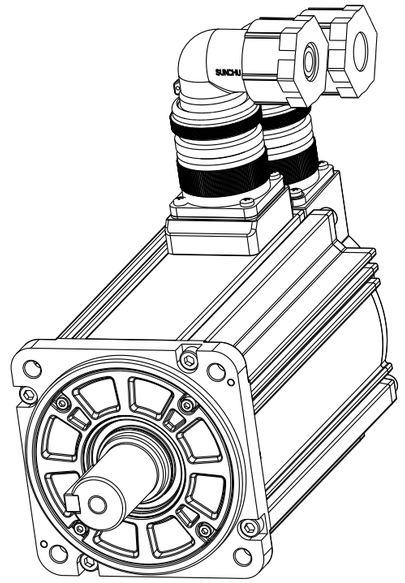

Basic function parameters	
Rated power KW	2.5
Rated voltage V	220
Rated current A	14.7
Peak current at rated speed A	53
Rated torque Nm	7.96
Peak torque at rated speed Nm	23.9
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm2	3.49±10%
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash °	/
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

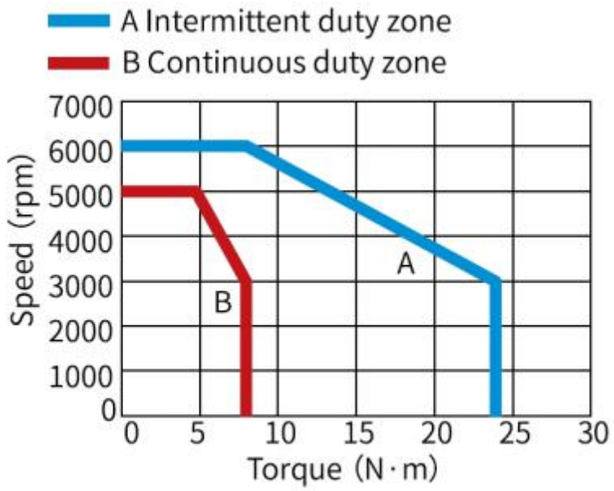

				Motor outline drawing	0111BA89-WX	
B00	Replace	/	/			
Version	Change method	Change by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			6..3Kg	1:1	B00
Approve	/					

Page 1 of 1		
Model	MS1H2-25C30CB-V631R-INT	

INOVANCE