
正样
2025.09.29
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit:Millimeter(mm)

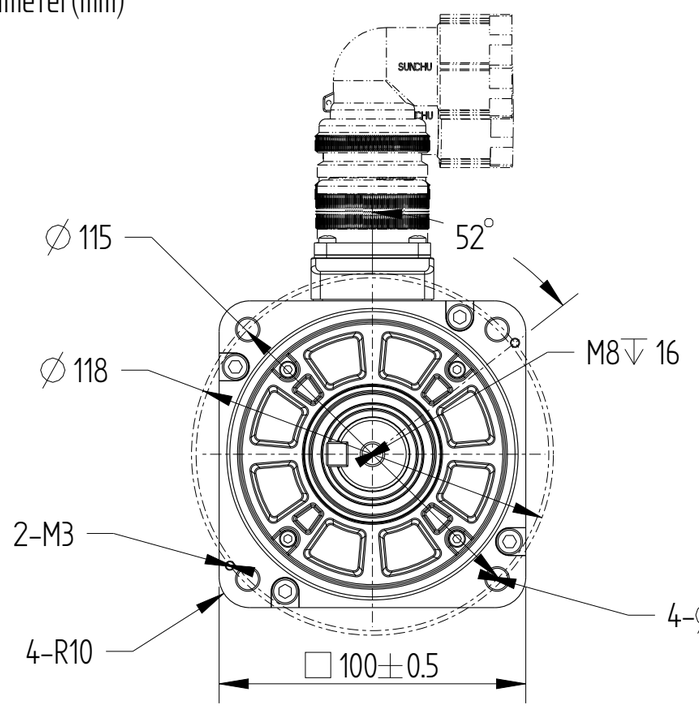

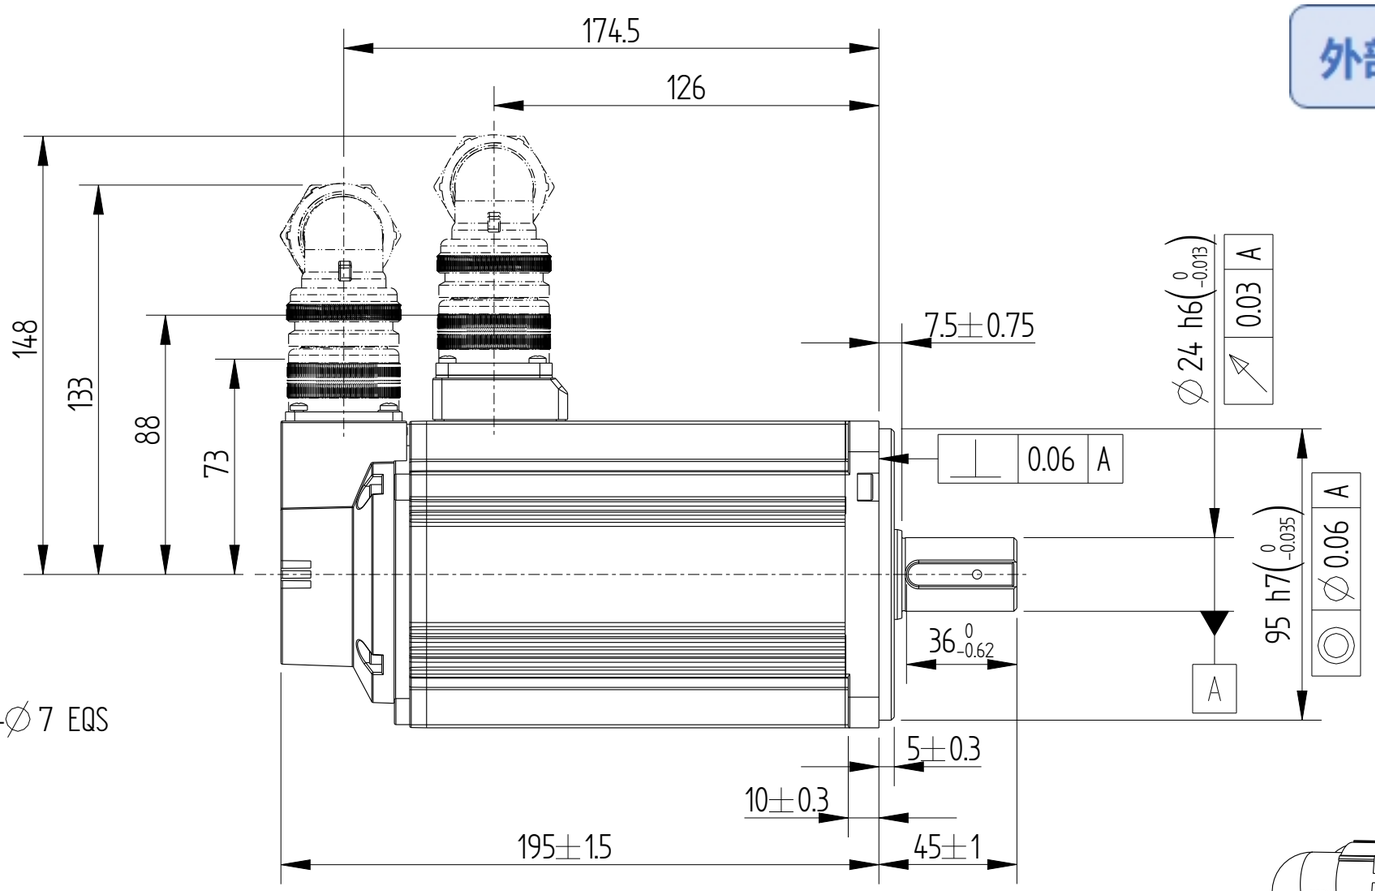


Basic function parameters	
Rated power KW	2.5
Rated voltage V	220
Rated current A	14.7
Peak current at rated speed A	53
Rated torque Nm	7.96
Peak torque at rated speed Nm	23.9
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm2	3.49±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash °	/
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

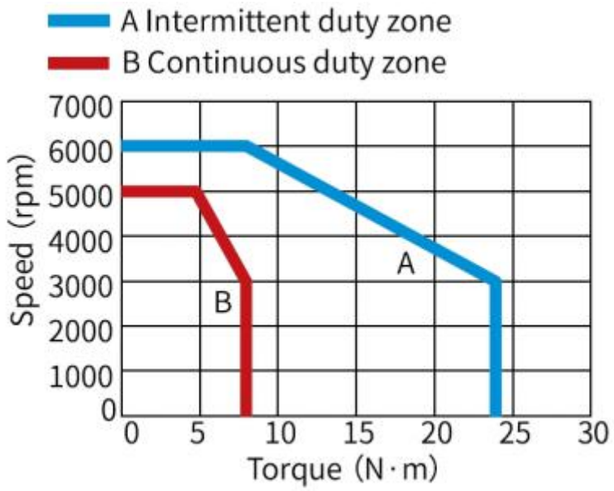




Dimension of shaft end



Dimension of shaft end with key

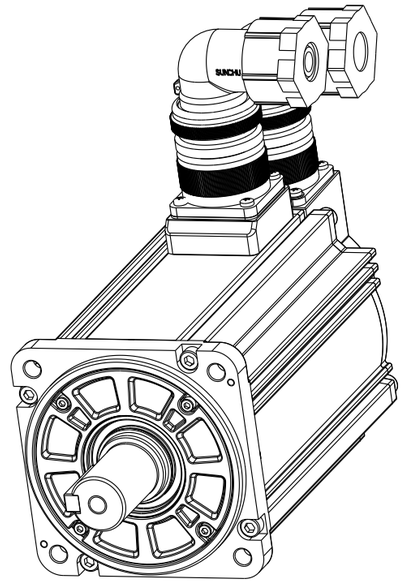

				Motor outline drawing	0111BB06-WX
B00	Replace	/	/		
Version	Change method	Change by	Date		
Design	/			/	Mark
Check	/				INOVANCE
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
Standardization	/			6..3Kg / 1:1 / B00	Model MS1H2-25C30CB-V331R-INT
Approve	/				

INOVANCE

A3