
正样
2025.09.29
B00


Copyright:Copyright infringement reserved.

外部公开


Amendment	Description


Unit:Millimeter mm

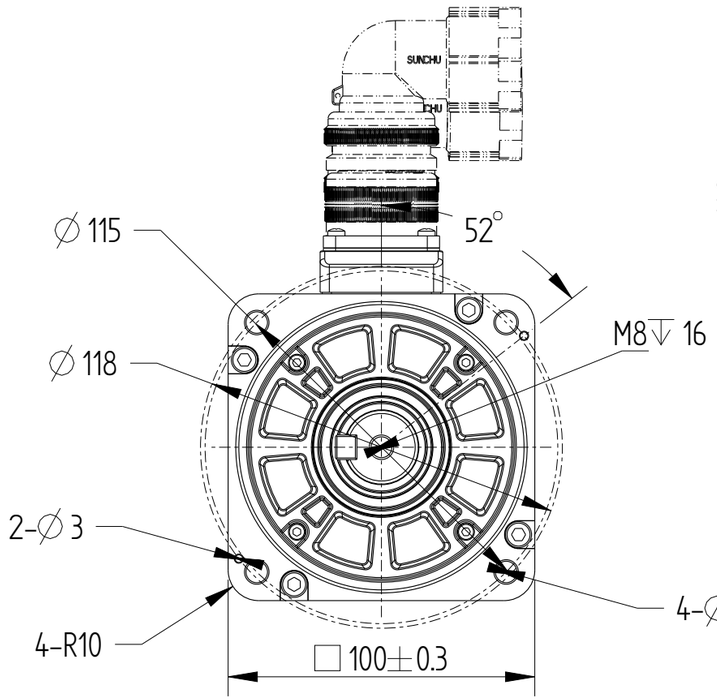

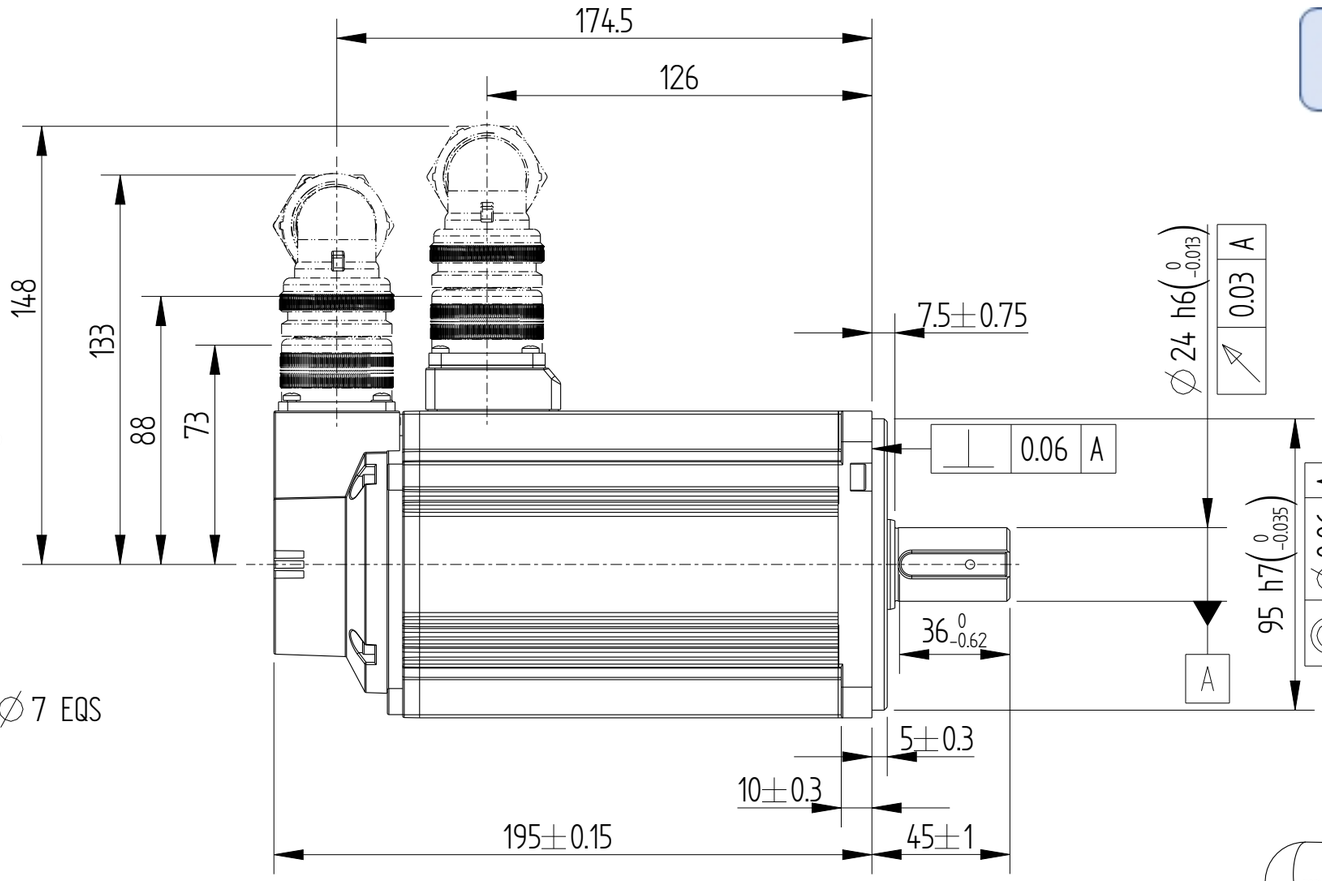


Basic function parameters	
Rated power KW	2.5
Rated voltage V	380
Rated current A	7.2
Peak current at rated speed A	26
Rated torque Nm	7.96
Peak torque at rated speed Nm	23.9
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm2	3.49±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤686
Axial load N	≤196

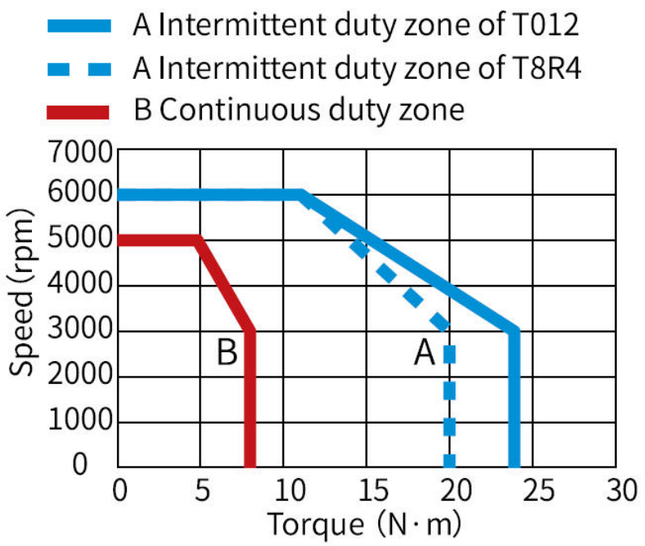




Dimension of shaft end



Dimension of shaft end with key

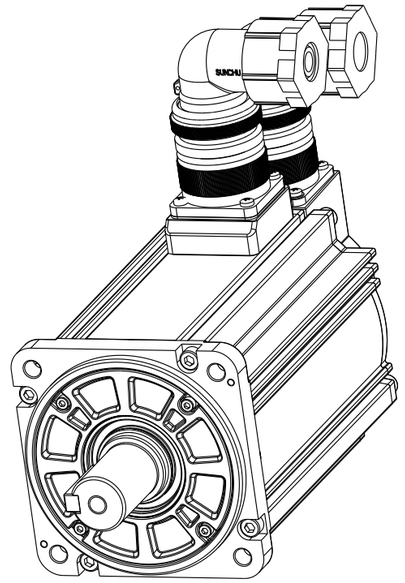

				Motor outline drawing		0111BB07-WX	
B00	Replace	/	/				
Version	Change method	Change by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			6.3kg	1:1	B00	Model MS1H2-25C30CB-V331R-INT
Approve	/						

INOVANCE

A3