

正样
2025.09.29
BD

Copyright:Copyright infingmengt reserved


Amendment	Description


外部公开

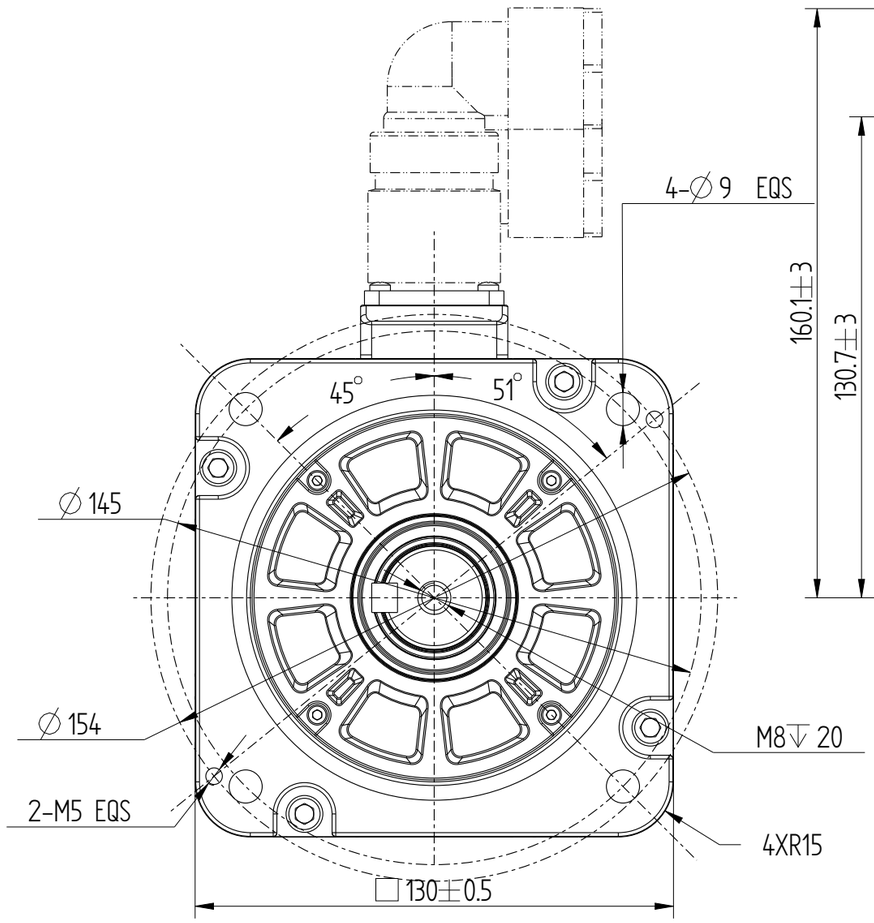

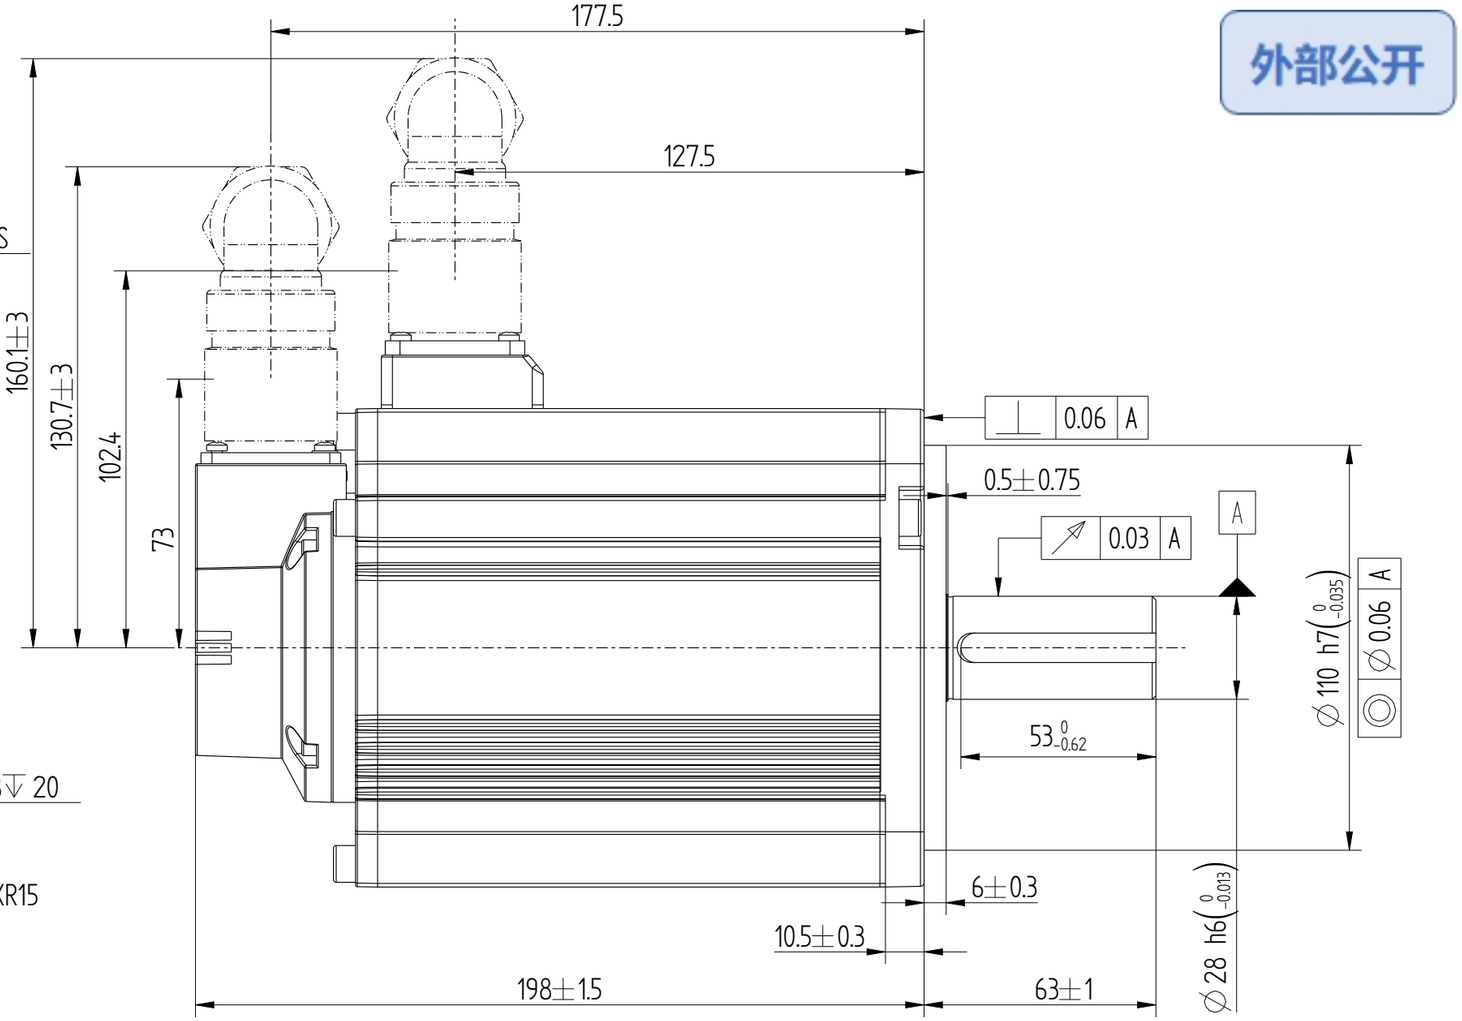


Basic function parameters	
Rated power KW	3
Rated voltage V	220
Rated current A	16.6
Peak current at rated speed A	55
Rated torque Nm	9.8
Peak torque at rated speed Nm	24.5
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	6.4±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	⩽1176
Axial load N	⩽392

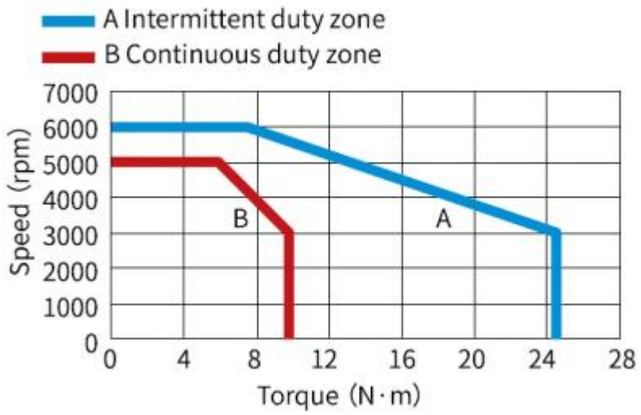




Dimension of shaft end



Dimension of shaft end with key

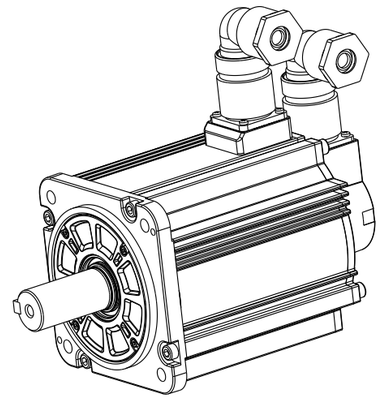

				Motor Outline Drawing	0111BB08-WX
B00	Replace	/	/		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				
Craft	/				
Verify	/			Weight	Scale / Version
Standardization	/			10 kg	3:5 / B00
Approve	/			Page 1 of 1	
				Model	MS1H2-30C30CB-V331R-INT

INOVANCE

A3