
正样
2025.09.29
B00


Amendment	Description

Copyright:Copyright infingmengt reserved


外部公开


Unit: Millimeter (mm)

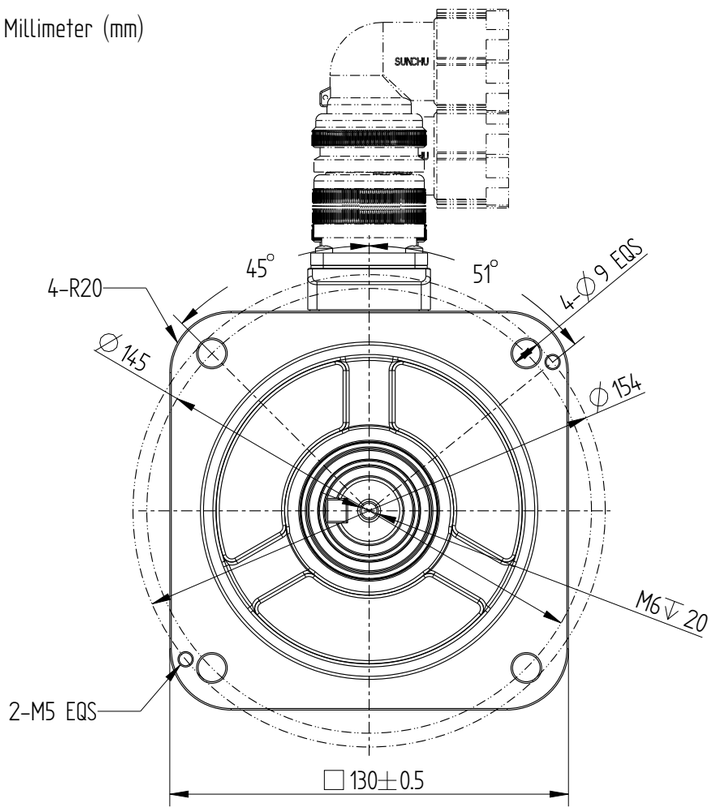

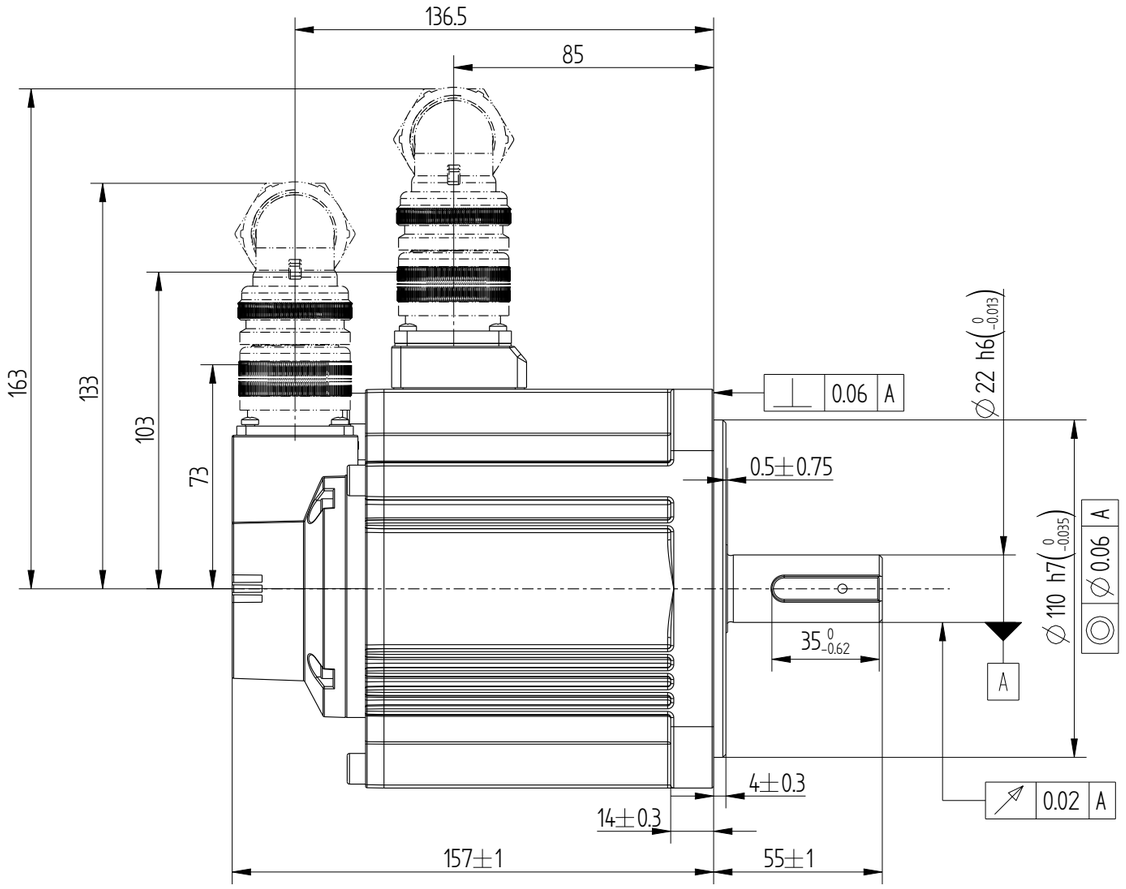


Basic function parameters	
Rated power kW	1.3
Rated voltage V	220
Rated current A	10.5
Peak current at rated speed A	27.3
Rated torque Nm	8.34
Peak torque at rated speed Nm	20.85
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg · cm^2	19.25±10%
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

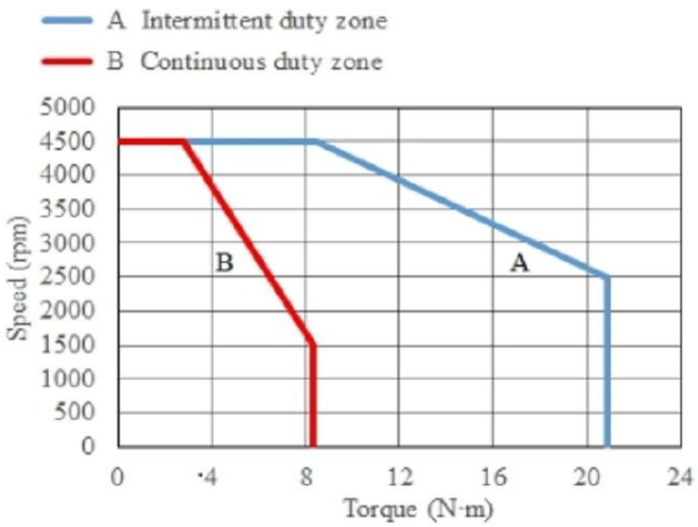




Dimension of shaft end



Dimension of shaft end with key

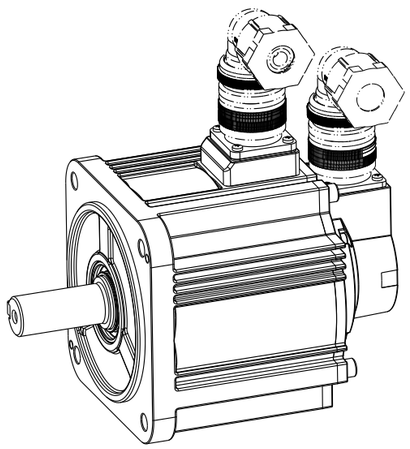

				Motor Outline Drawing	0111BB14-WX
B00	Replace	/	/		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
stangardization	/			7.1kg / 1:2 / B00	Model: MS1H3-13C15CB-V631R-INT
Approve	/				

INOVANCE

A3