
正样
2025.09.29
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

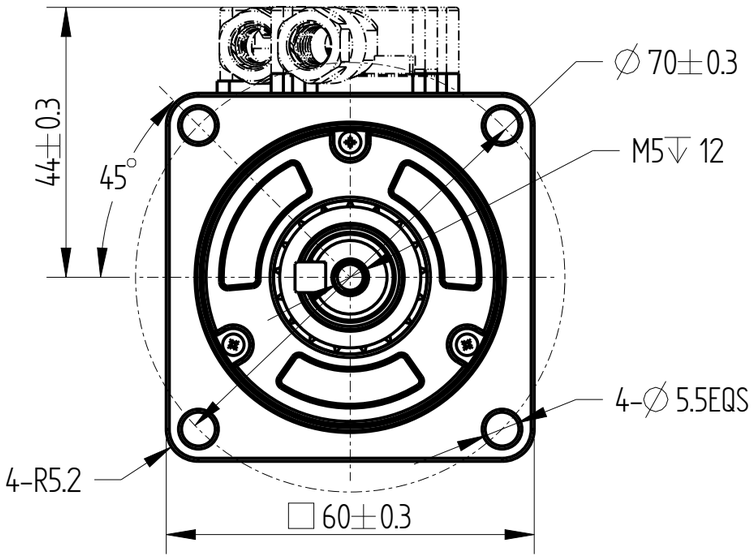

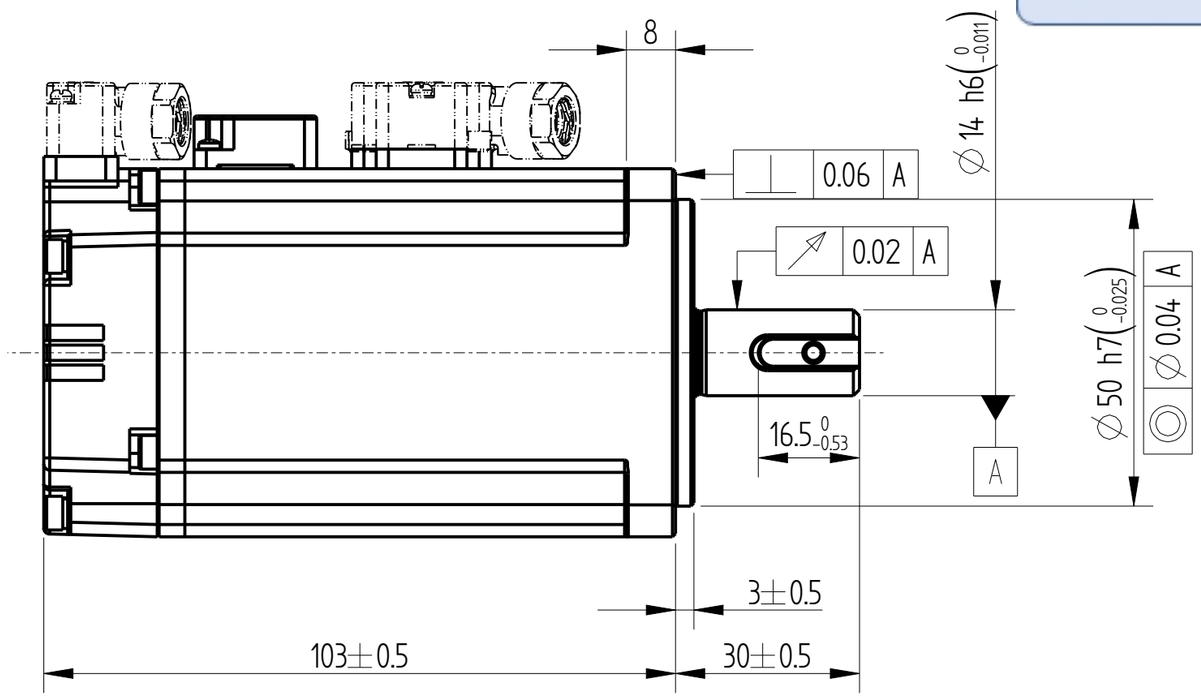


Basic function parameters	
Rated power kW	0.2
Rated voltage V	220
Rated current A	1.5
Peak current at rated speed A	5.3
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm²	0.106±10%
Encoder resolution	26bit
Insulation class	F(155)
Protection class	IP67
Static torque of brake Nm	⩾1.5
Brake power supply V	DC 24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽245
Axial load N	⩽74

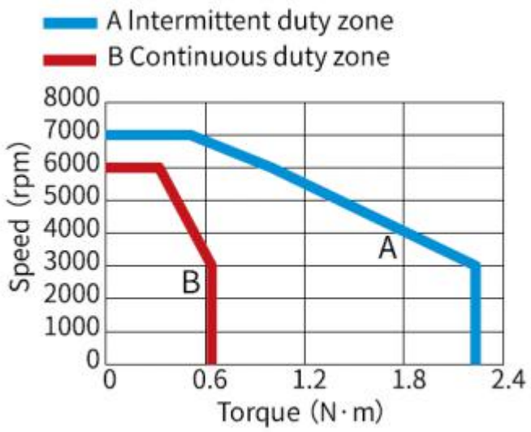


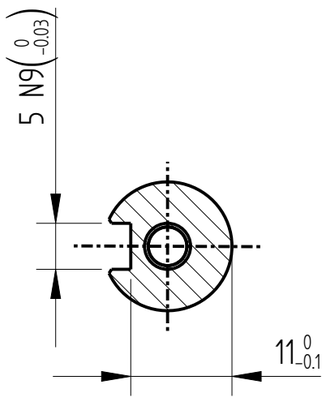

Dimension of shaft end

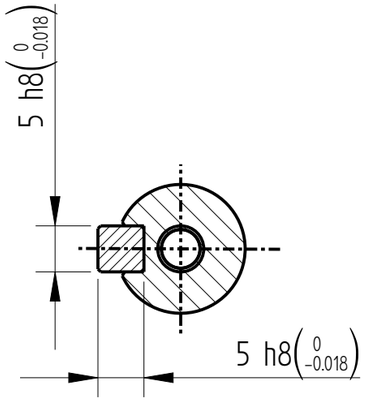

Dimension of shaft end with key

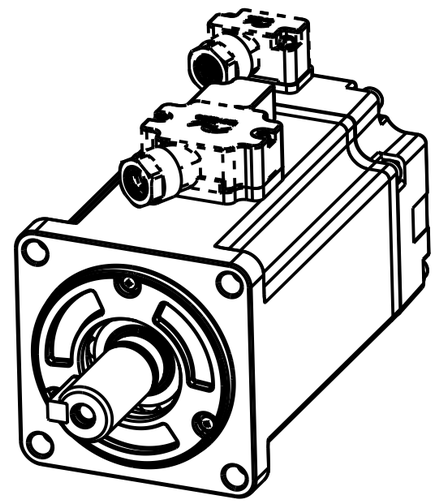

				Motor Outline Drawing	0111BB19-WX	
B00	Replace	/	20250924			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			1.17kg	1:1	B00
Approve	/					

Page 1 of 1

Model MS1H1-20B30CB-V634R-INT

INOVANCE

A3