
正样
2025.09.30
BBD


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

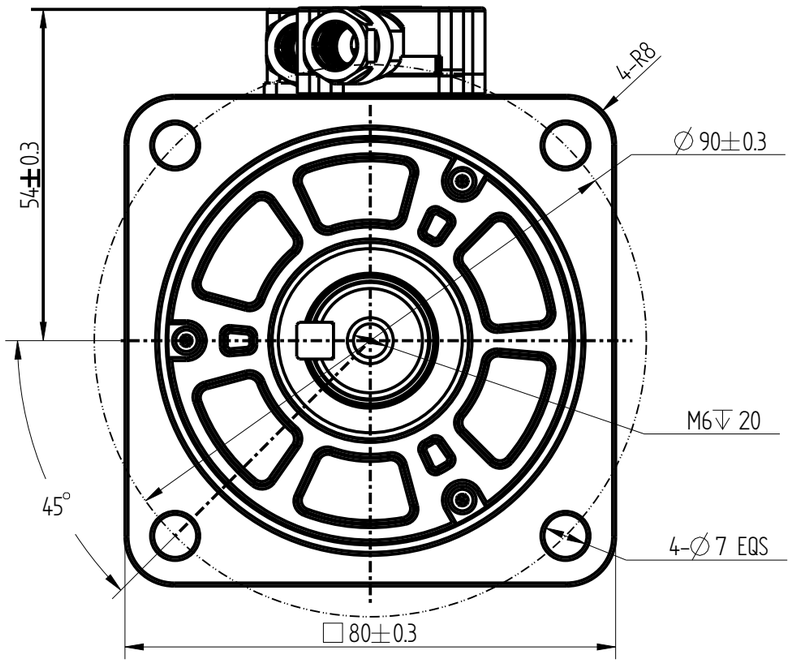

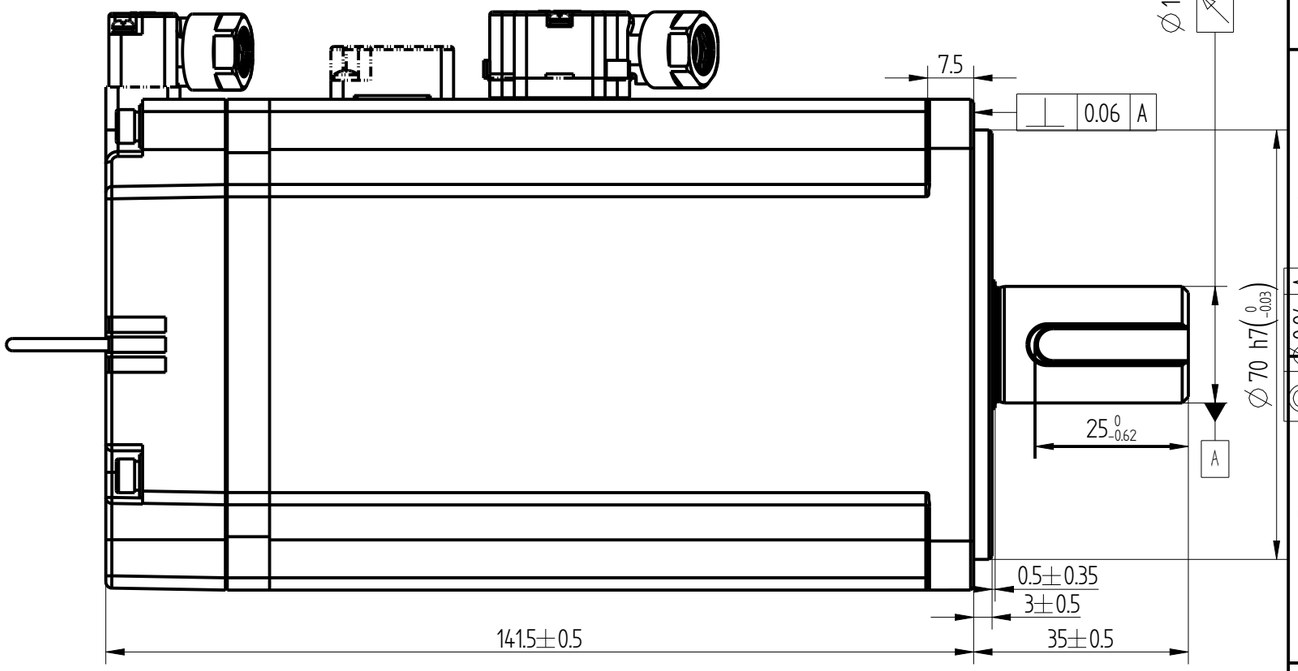


Basic function parameters	
Rated power KW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.37
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.71±10%
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾3.2
Brake power supply	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

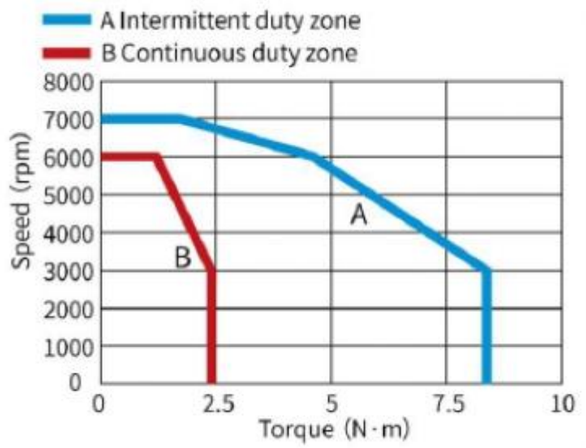




Dimension of shaft end



Dimension of shaft end with key

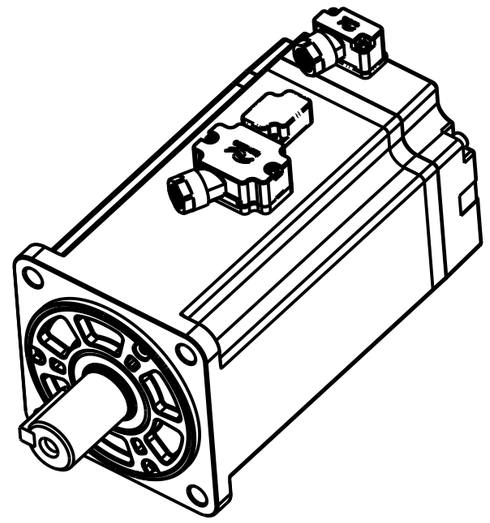

				Motor Outline Drawing	0111BB21-WX	
B00	New Archive	/	20250926			
Version	Change method	Changed by	Date			
Design	/				Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			2.88kg	1:1	B00	Model	MS1H1-75B30CB-V634R-INT
Approve	/					

INOVANCE

A3