

正样
2025.09.29
Copyright:Copyright infingmengt reserved


Amendment	Description

外部公开


Unit: Millimeter (mm)

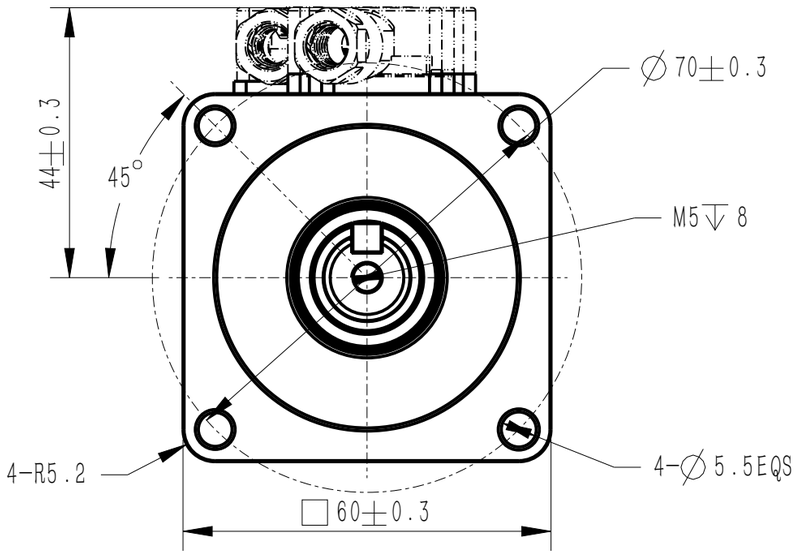

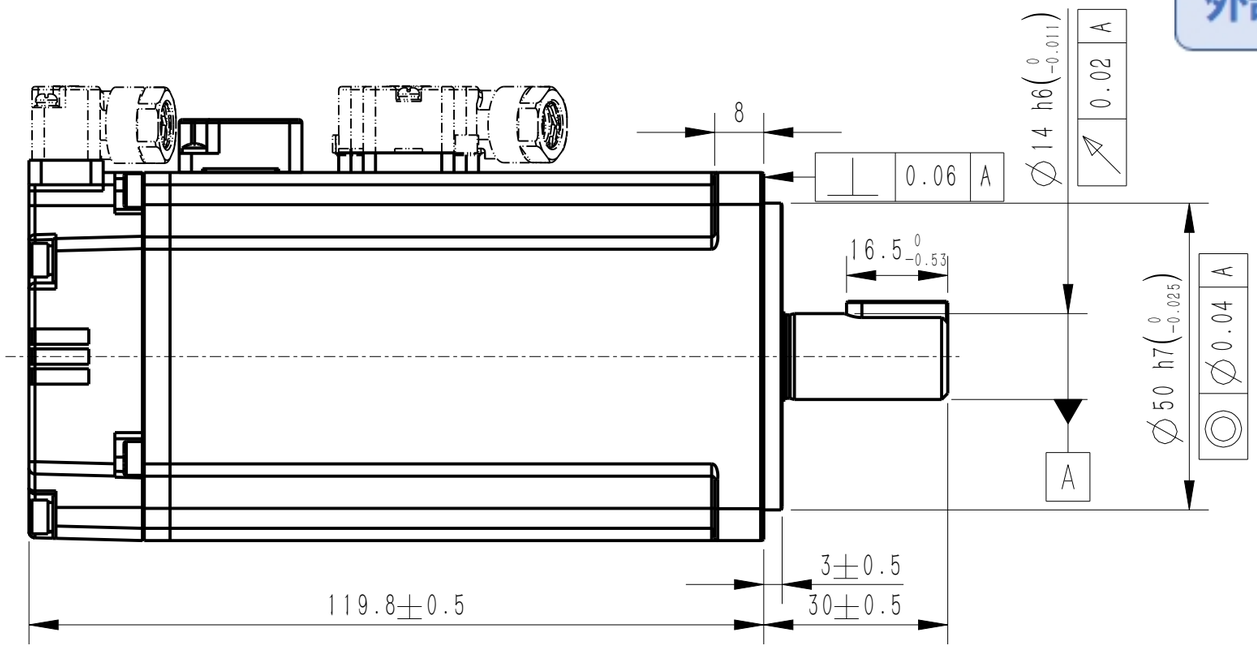


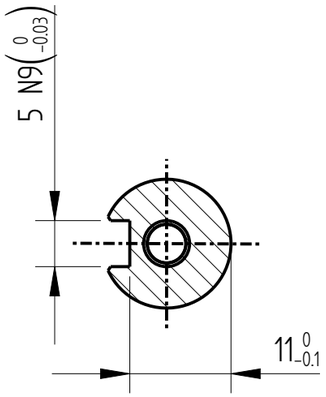


Dimension of shaft end

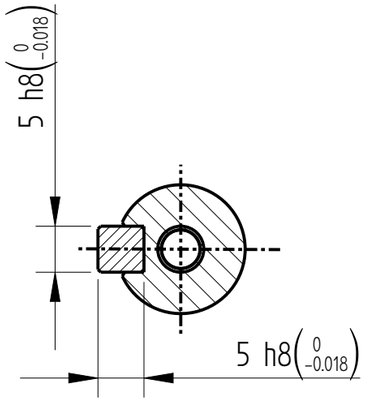

Dimension of shaft end with key

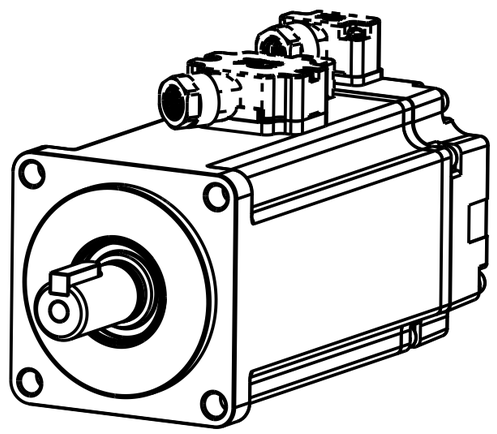

Basic function parameters	
Rated power kW	0.4
Rated voltage V	220
Rated current A	2.4
Peak current at rated speed A	9.2
Rated torque Nm	1.27
Peak torque at rated speed Nm	4.45
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia $kg.cm^2$	0.44±10%
Encoder resolution	26bit
Insulation class	F (155)
Protection class	IP67
Static torque of brake Nm	⩾1.5
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽245
Axial load N	⩽74

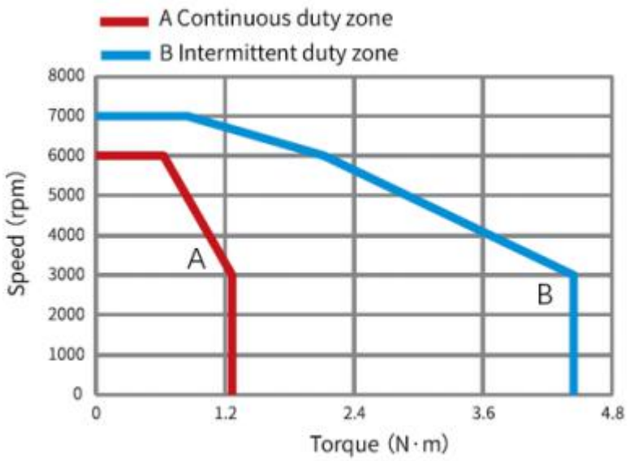

				Motor Outline Drawing	0111BB24-WX
B00	Replace	/	20250924		
Version	Change method	Changed by	Date		
Design	/			/	Mark INOVANCE
Check	/				
Craft	/				
Verify	/			Weight: 1.48kg	Scale: 1:1
Standardization	/			Version: B00	Page 1 of 1
Approve	/			Model: MS1H4-40B30CB-V634R-INT	

INOVANCE

A3