
正样
2025.09.30
BOO


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

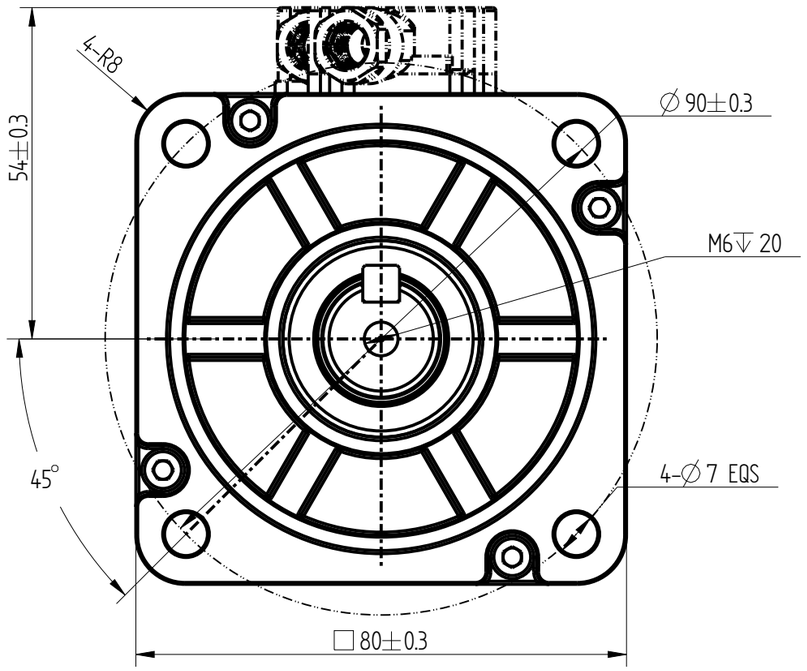

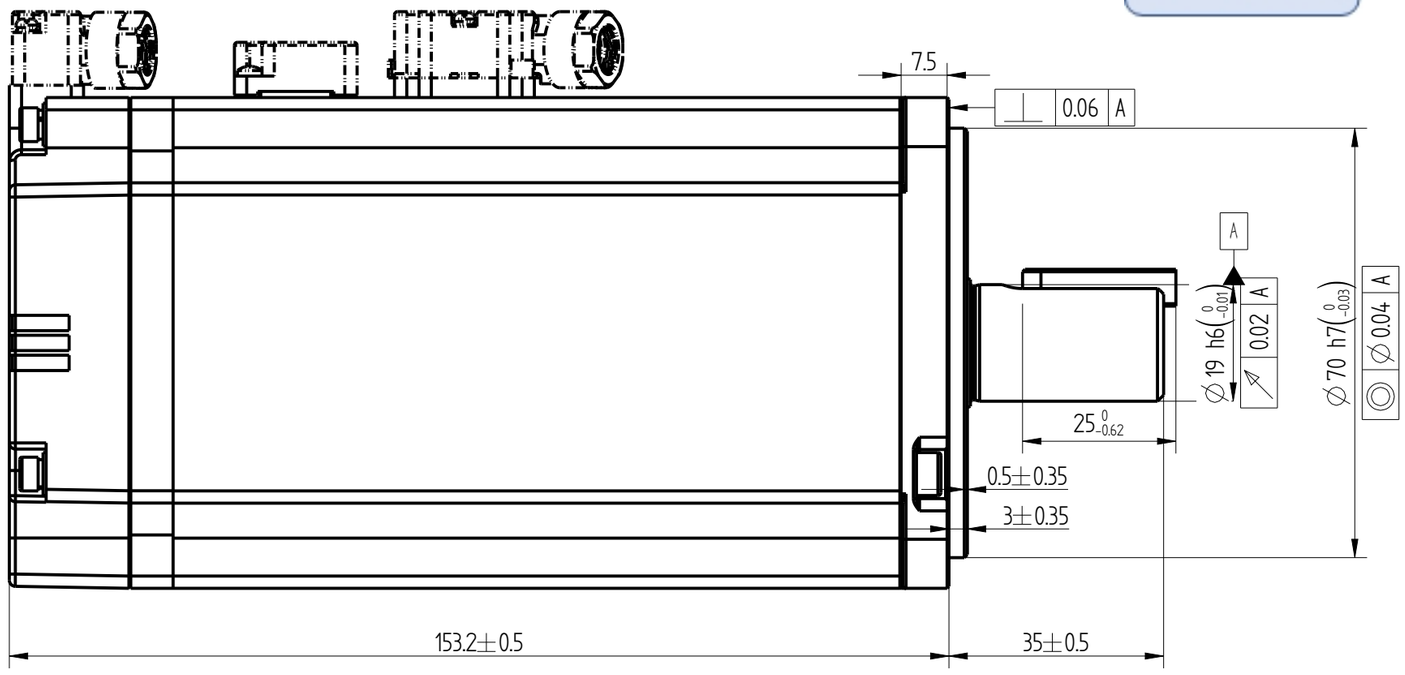


Basic function parameters	
Rated power KW	1
Rated voltage V	220
Rated current A	6.5
Peak current at rated speed A	24
Rated torque Nm	3.18
Peak torque at rated speed Nm	11.13
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.97
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾3.2
Brake power supply	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

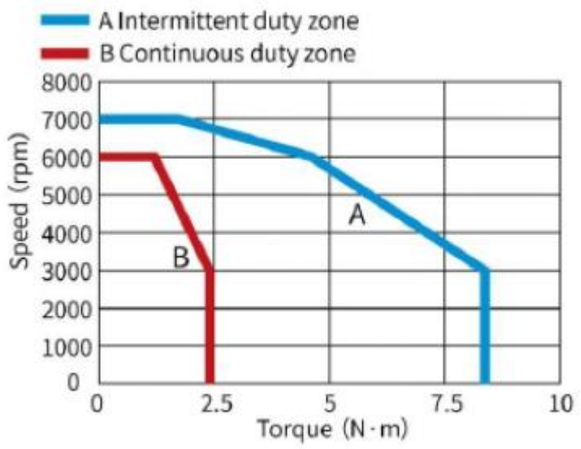




Dimension of shaft end



Dimension of shaft end with key

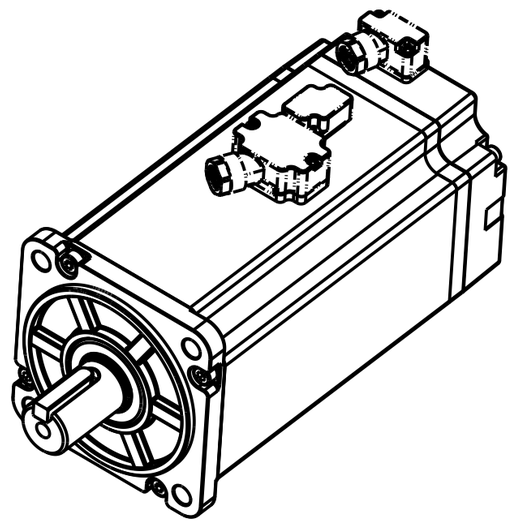

				Motor Outline Drawing		0111BB26-WX
B00	New Archive	/	20250926			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.9 kg	1:2	B00
Approve	/					

Page 1 of 1		
Model	MS1H4-10C30CB-V634R-INT	

INOVANCE

A3