
正样
2026.05.29
B00


外部公开

Amendment	Description

Copyright: Copyright infringement reserved.


Unit: mm

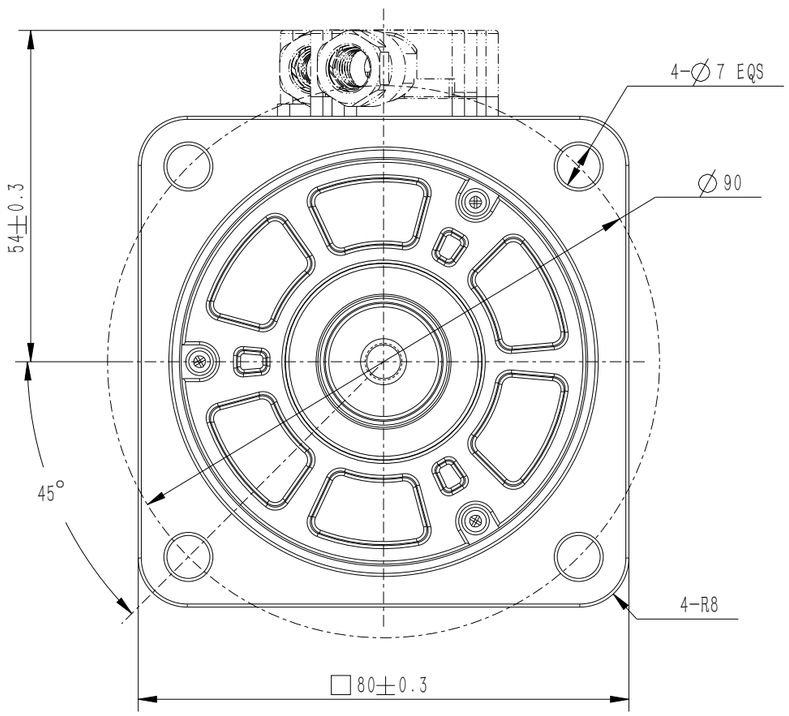


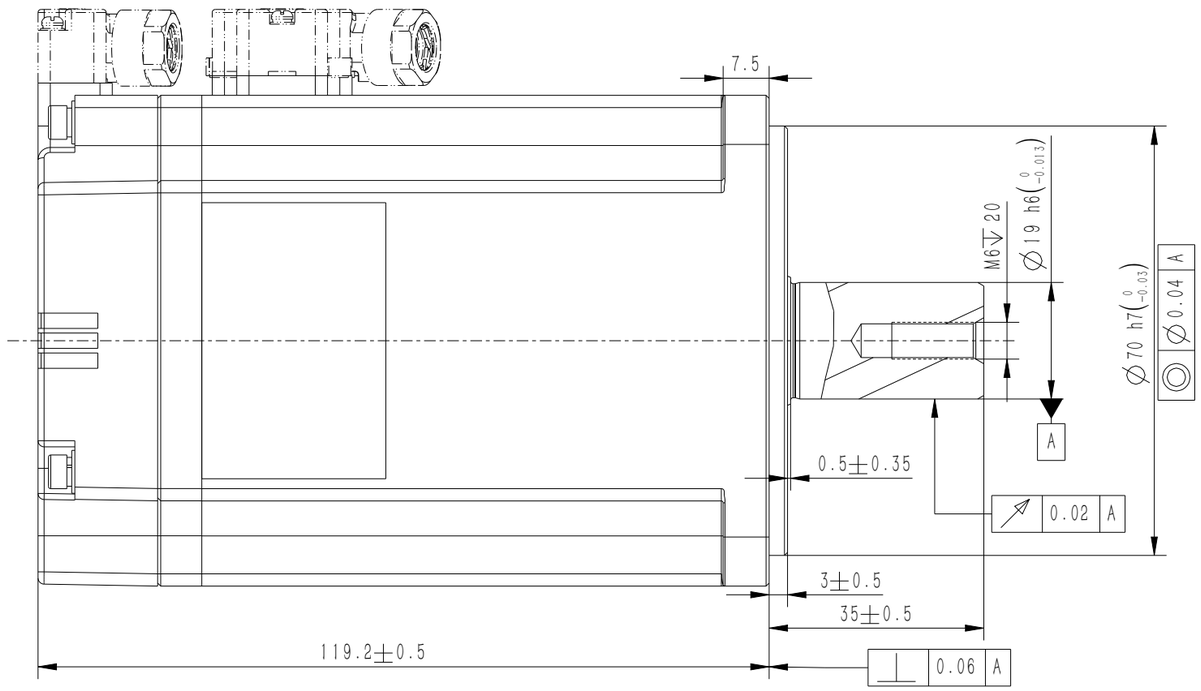


Basic function parameters	
Rated power kW	1
Rated voltage V	220
Rated current A	6.2
Peak current at rated speed A	24
Rated torque Nm	3.18
Peak torque at rated speed Nm	11.1
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg.cm^2	0.82
Encoder resolution	23bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤392
Axial load N	≤147

Service life	
Radial load (N)	Axial load (N)
Fr	Fa
392	147



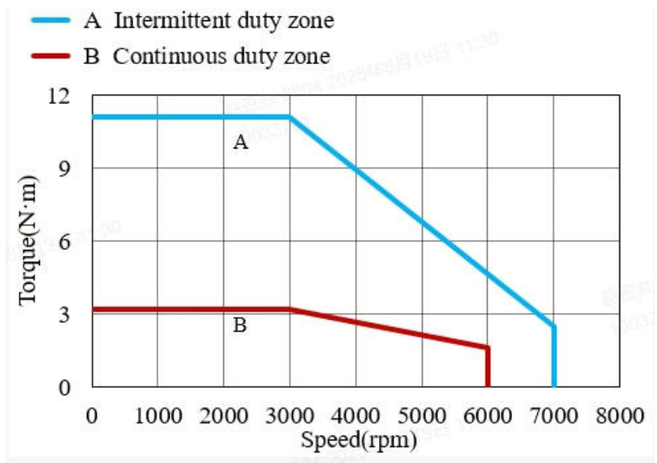

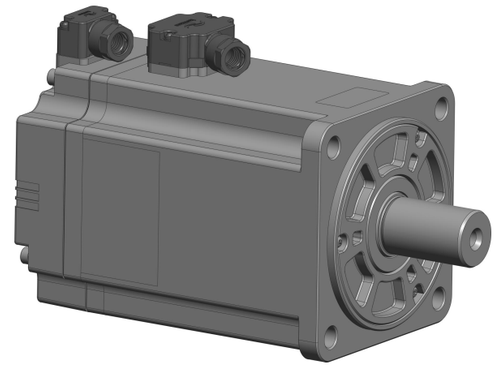

				Motor Outline Drawing	0111BB83-WX	
B00	New Archive	/	20260529			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.61kg	1:1	B00
Approve	/					

Page 1 Of 1

Model MS1H1-10C30CB-A311R-INT

INOVANCE

A3