
正样
2026.04.15
BOO


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

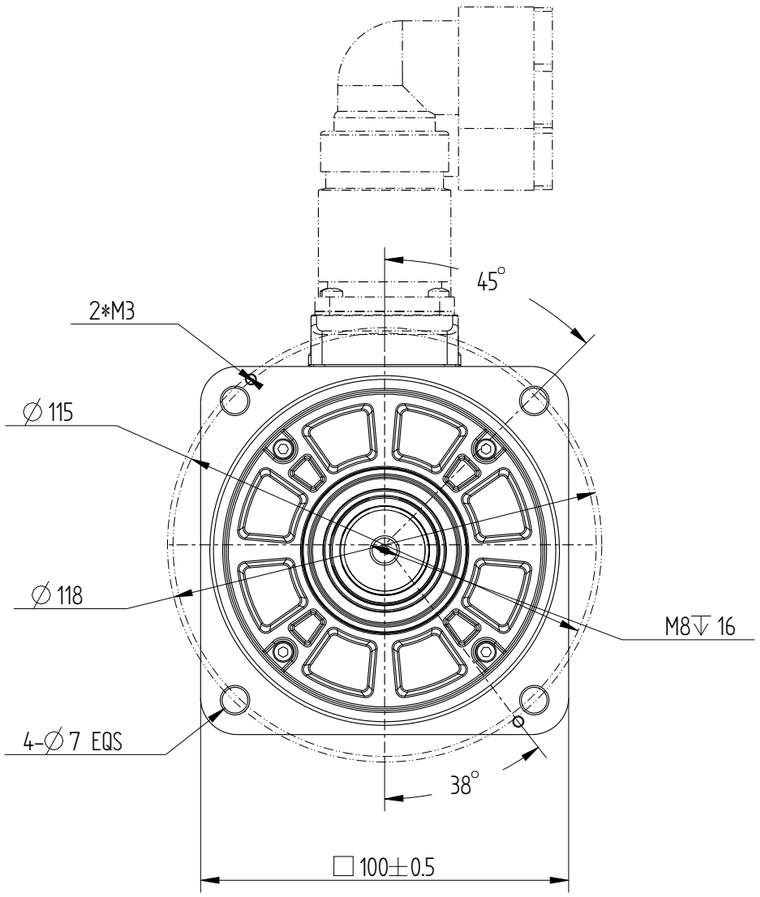

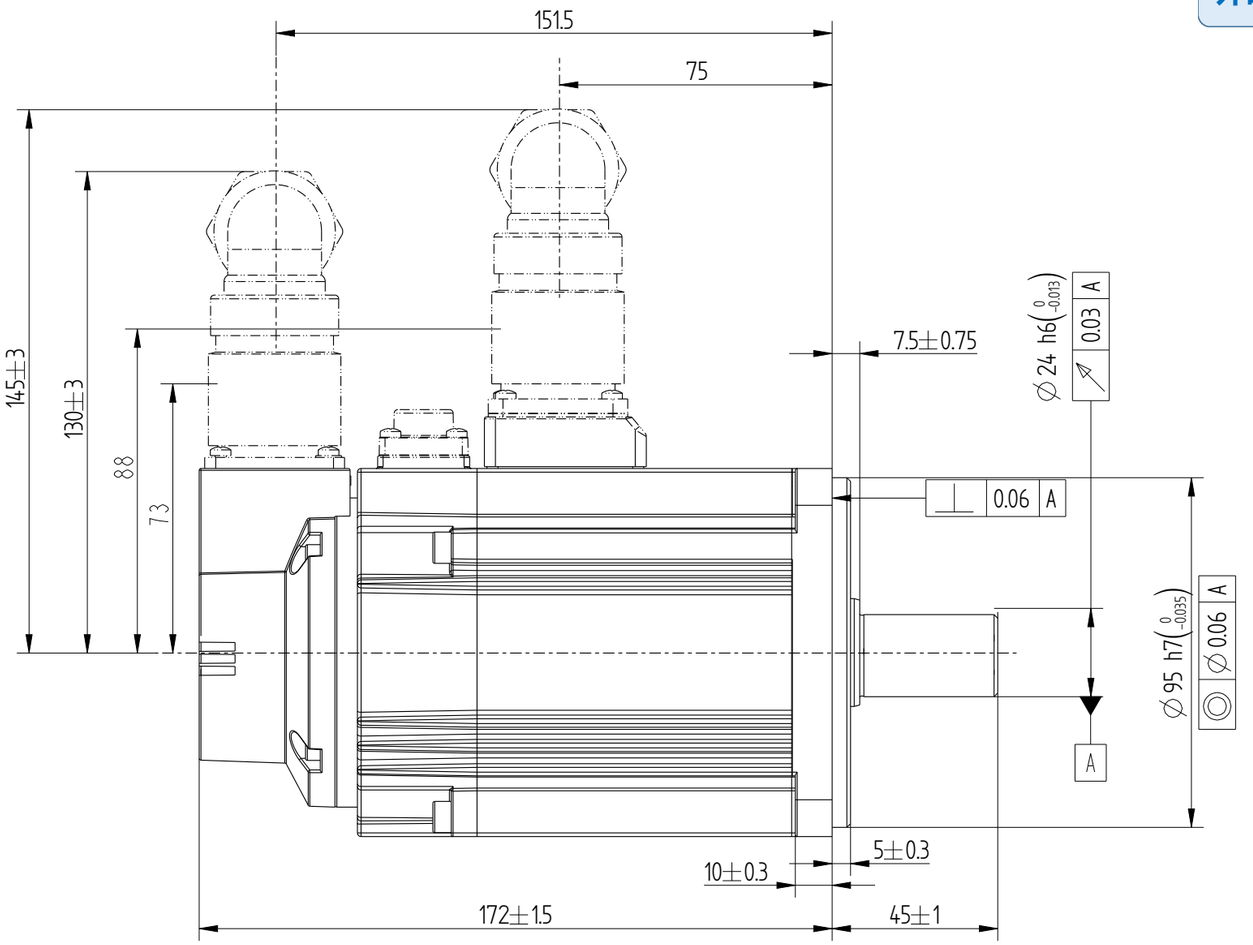

Basic function parameters	
Rated power KW	1.0
Rated voltage V	380
Rated current A	3.3
Peak current at rated speed A	11
Rated torque Nm	3.18
Peak torque at rated speed Nm	9.54
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm2	2.6±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾8
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

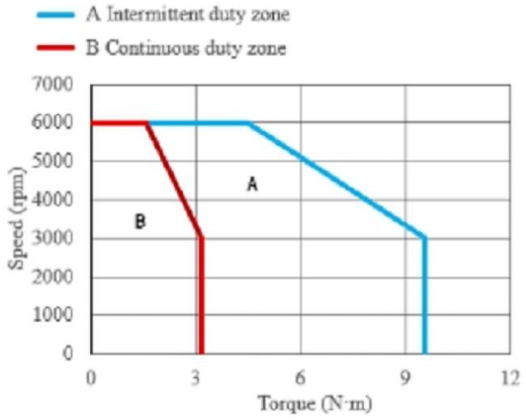

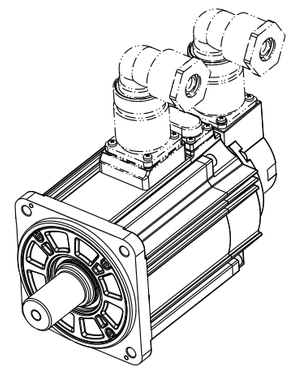

				Motor Outline Drawing		0111BC56-WX
B00	Replace	/	20260415			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			4.9kg	3:5	B00
Approve	/					

Page 1 of 1

Model MS1H2-10C30CD-A314R-INT

INOVANCE

A3