
正样
2026.08.13
B00


Amendment	Description


外部公开

Copyright: Copyright infringement reserved.


Unit: mm

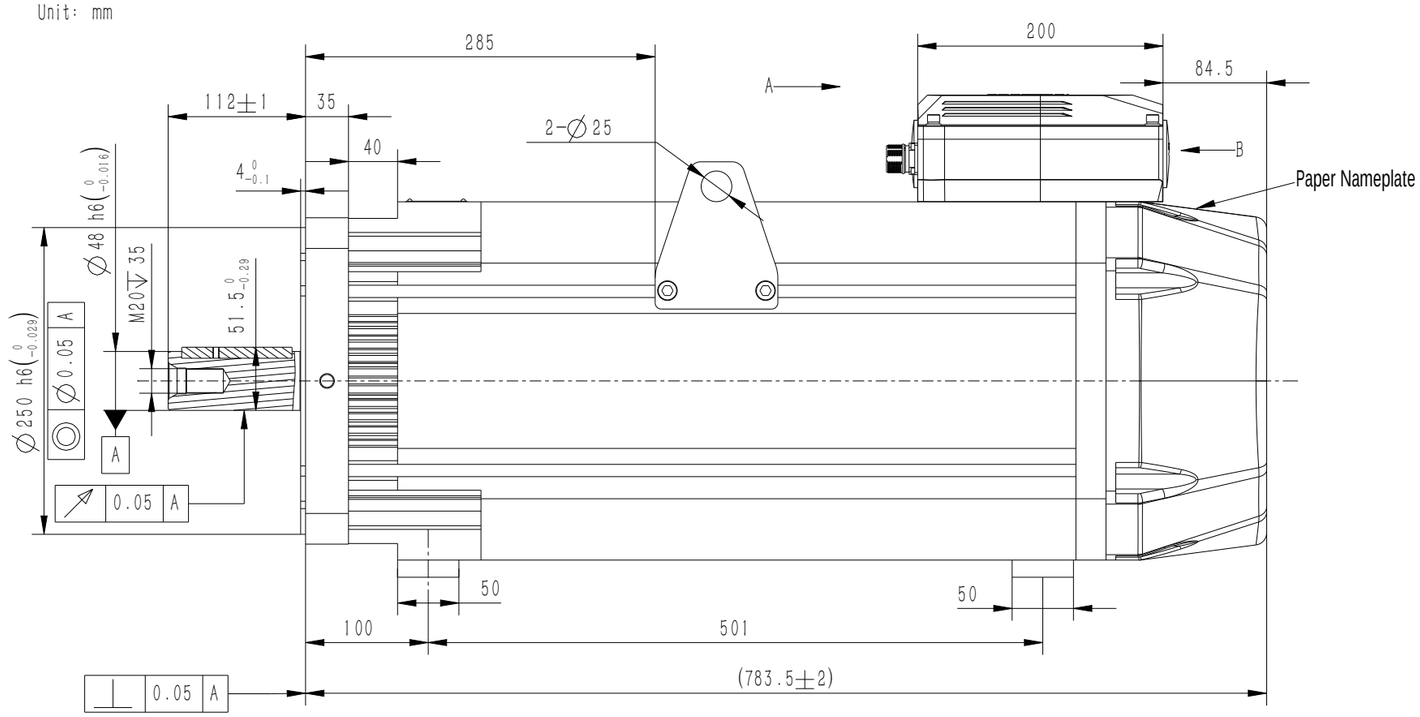


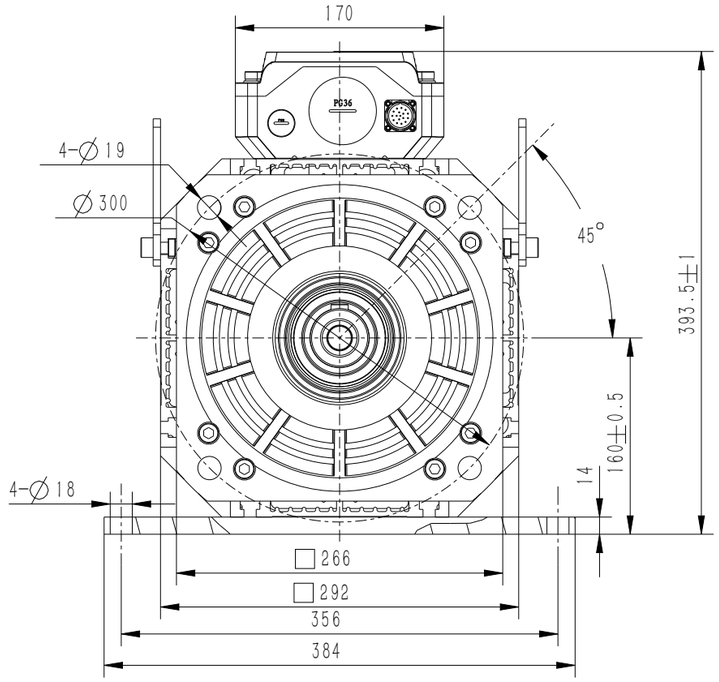




Standard Accessory Type A Round Head Plain Flat Key 14*9*90
Refer to GB/T 1096-2003

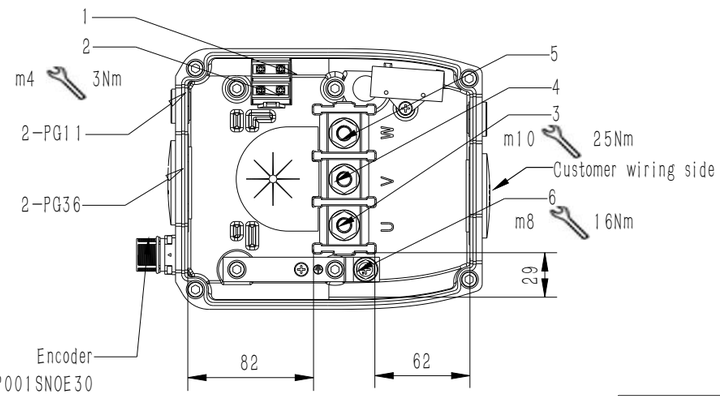

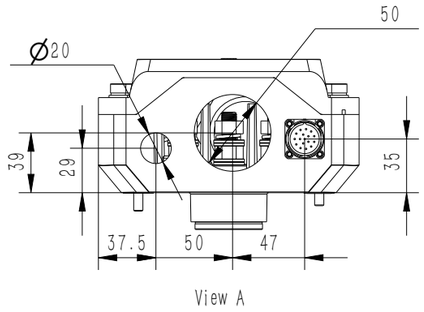


View A

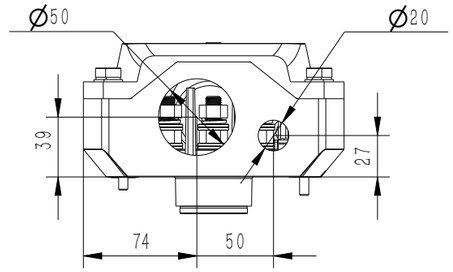

View B

Service life	
Radial load (N)	Axial load (N)
Fr	Fa
2641	501



Nr	Specifications	Shape	Description
1	M4	Forked Type	Fan+
2	M4		Fan-
3	M10	Ring Type	U(red)
4	M10		V(yellow)
5	M10		W(blue)
6	M8		GND

Name	Definition of wiring for absolute value encoders							PT1000	
Definition	PS+ Yellow	PS- Yellow black	VB Battery+ Blue	VB Battery- Blue black	+5V Red	GND Black	Shielding layer	PT1000- White	PT1000+ Red
17P Aviation connector	10	7	5	6	16	9	15	4	14



				Motor Outline Drawing	0111BF24-WX	
B00	新归档	何亮	20260814			
Version	Change method	Changed by	Date			
Design	何亮			/	Mark	INOVANCE
Check	姚铜佳					
Craft	孟沙					
Verify	王凡			Weight	Scale	Version
Standardization	朱秋萍			206kg	1:5	B00
Approve	庞一龙					

Page 1 Of 2

Model: MEG26-80D17CD-A3A1F-K-INT

INOVANCE


正样
2026.08.13
B00

Amendment	Description

外部公开

Unit: mm

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	450
Rated Current	A	135
Rated Power	kW	80.0
Rated Speed	rpm	1700
Rate Frequency	Hz	113.33
Peak Torque	Nm	800
Max speed@380V	rpm	2500
Rated voltage	V	380
Rotor inertia	kg · cm2	640
Weight	kg	206
Duty	S1	

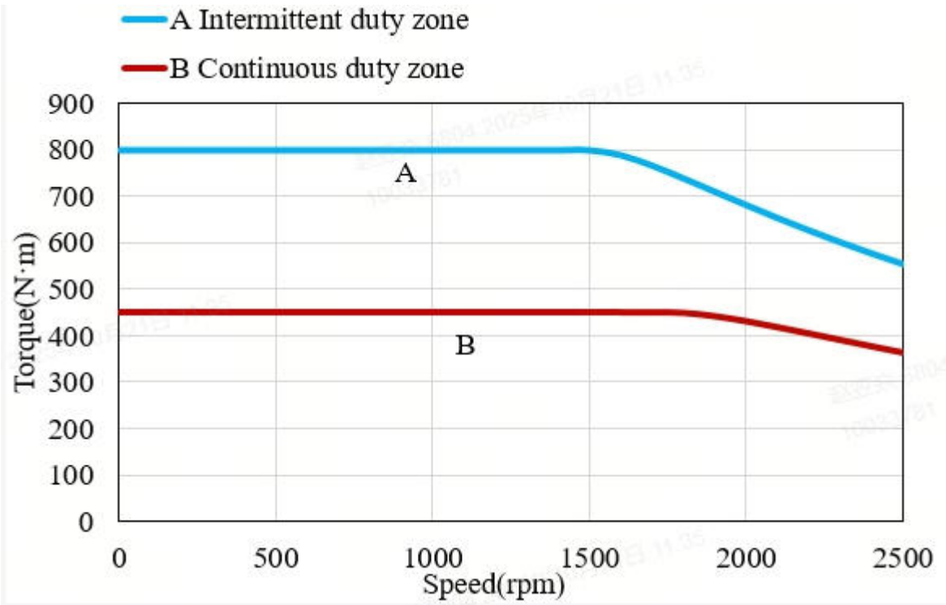

				Motor Outline Drawing			0111BF24-WX
B00	新归档	何亮	20260814				
Version	Change method	Changed by	Date				
Design	何亮			/			Mark
Check	姚钢佳						
Craft	孟沙						
Verify	王凡			Weight	Scale	Version	Page 2 Of 2
Standardization	朱秋萍			206kg	1:5	B00	Model MEG26-80D17CD-A3A1F-K-INT
Approve	庞一龙						

Copyright: Copyright infringement reserved.

INOVANCE

A3