
正样
2025.08.26
100


All rights reserved. Any infringement will be investigated.

Revise	Description


外部公开

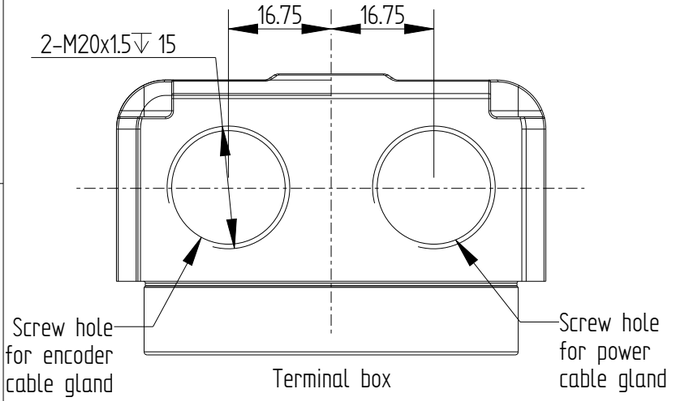


Terminal box

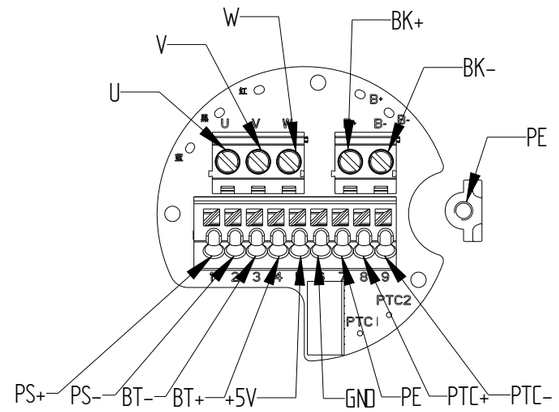



Terminal connector definition

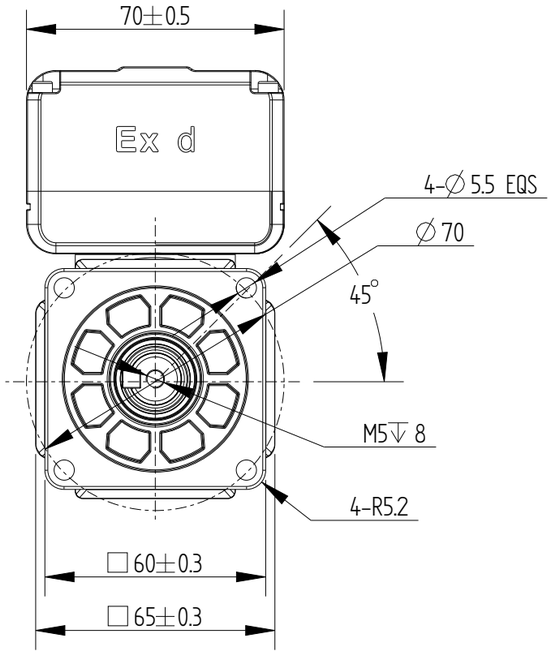


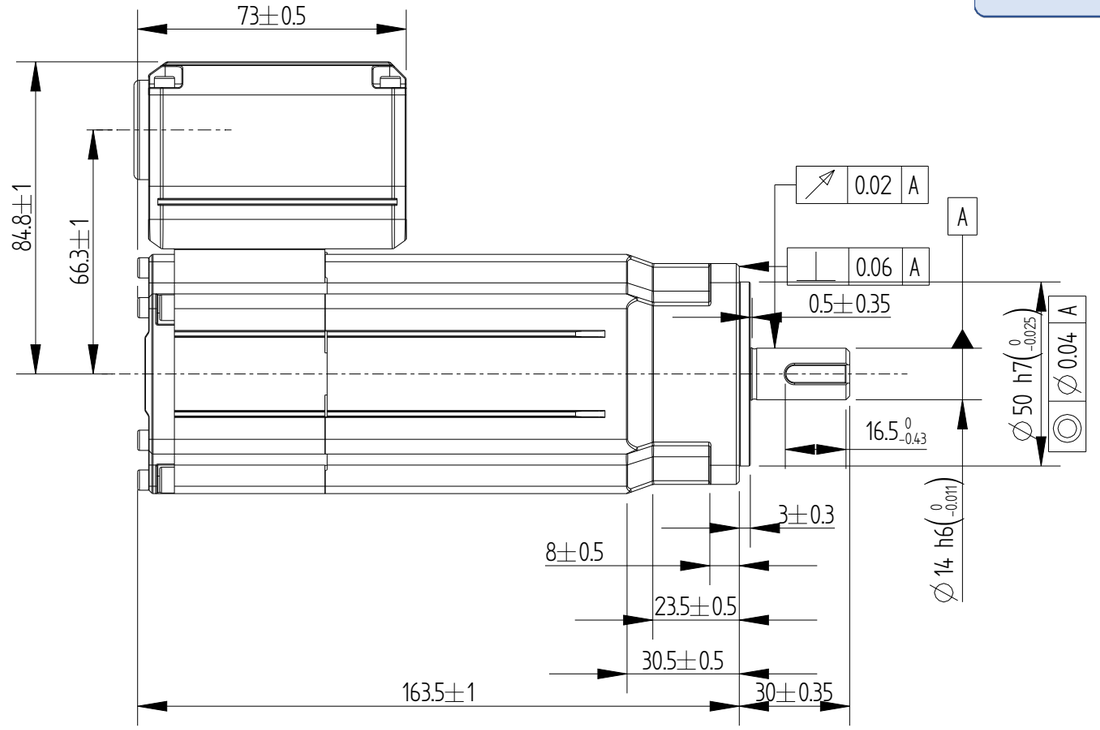

Basic function parameters	
Rated power Kw	0.4
Rated voltage V	220
Rated current A	2.4
Peak current at rated speed A	9.2
Rated torque Nm	1.27
Peak torque at rated speed Nm	4.45
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.45±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	⩾1.5
Brake power supply V	DC24V±10%
Brake backlash °	⩽1
Duty cycle	S1
Radial load N	⩽245
Axial load N	⩽74

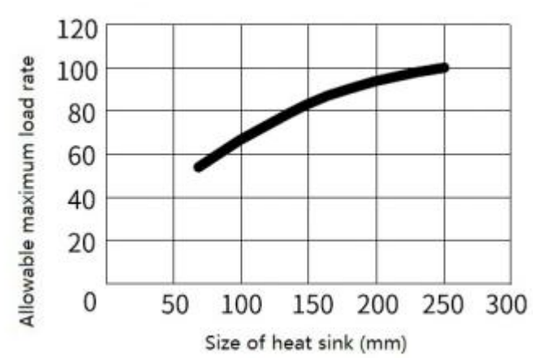


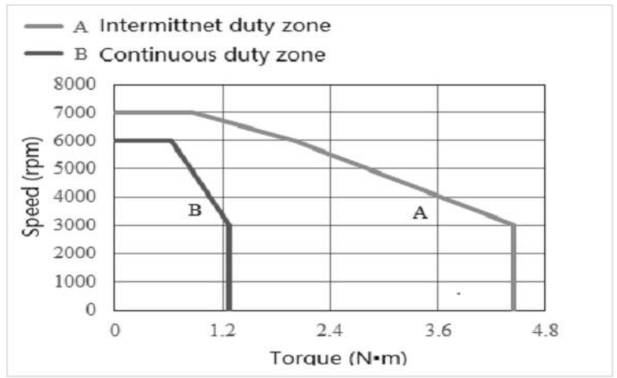

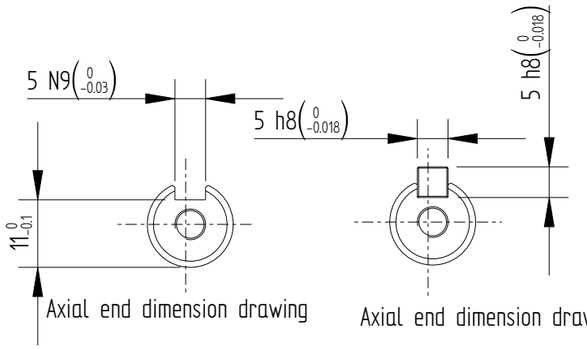

Axial end dimension drawing

Axial end dimension drawing with key

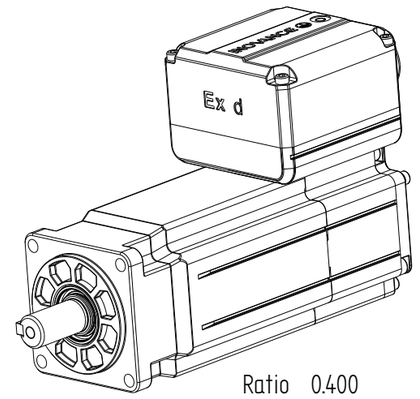

Ratio 0.400

				Outline drawing of the whole machine	0111BJ50-WX		
B00	New Archive	/	20260309				
Version	Alter mode	Changer	Date				
Design	/			/	Projection mark	INOVANCE	
Proofread	/						
Technological	/						
Check	/			Weight	Ratio	Version	The first page one page in total
Standardization	/			kg	1:2	B00	Product MS1H4-40B30CB-A334R-INT-EX d T4
Approve	/						

Inovance Technology Co., Ltd.

A3