

正样
2026.08.26
200


All rights reserved. Any infringement will be investigated.


外部公开

Revise	Description

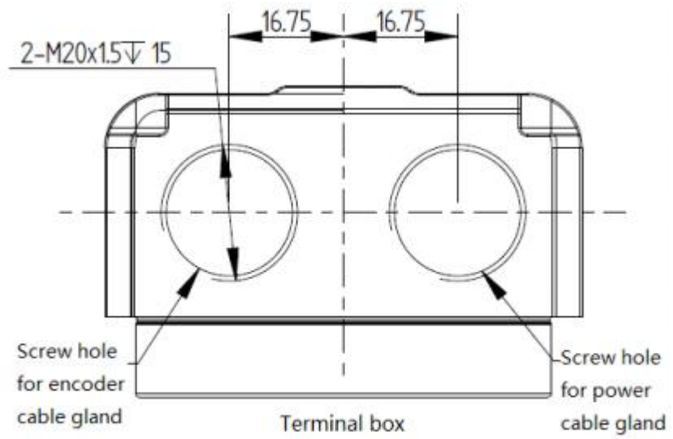


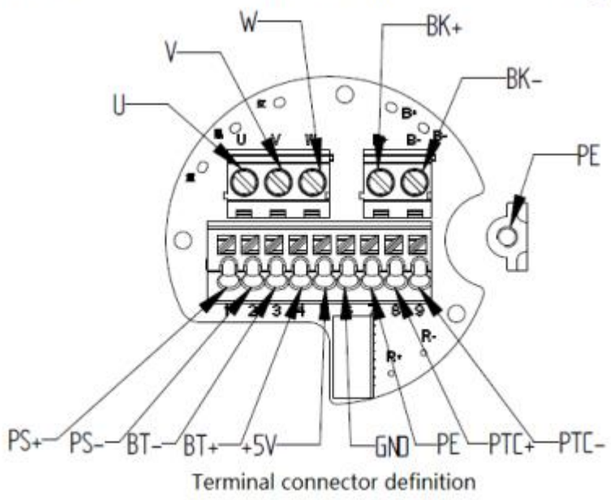


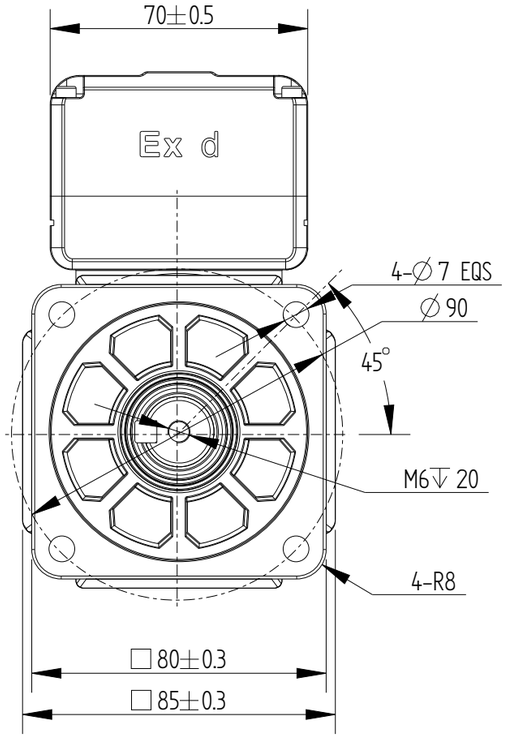


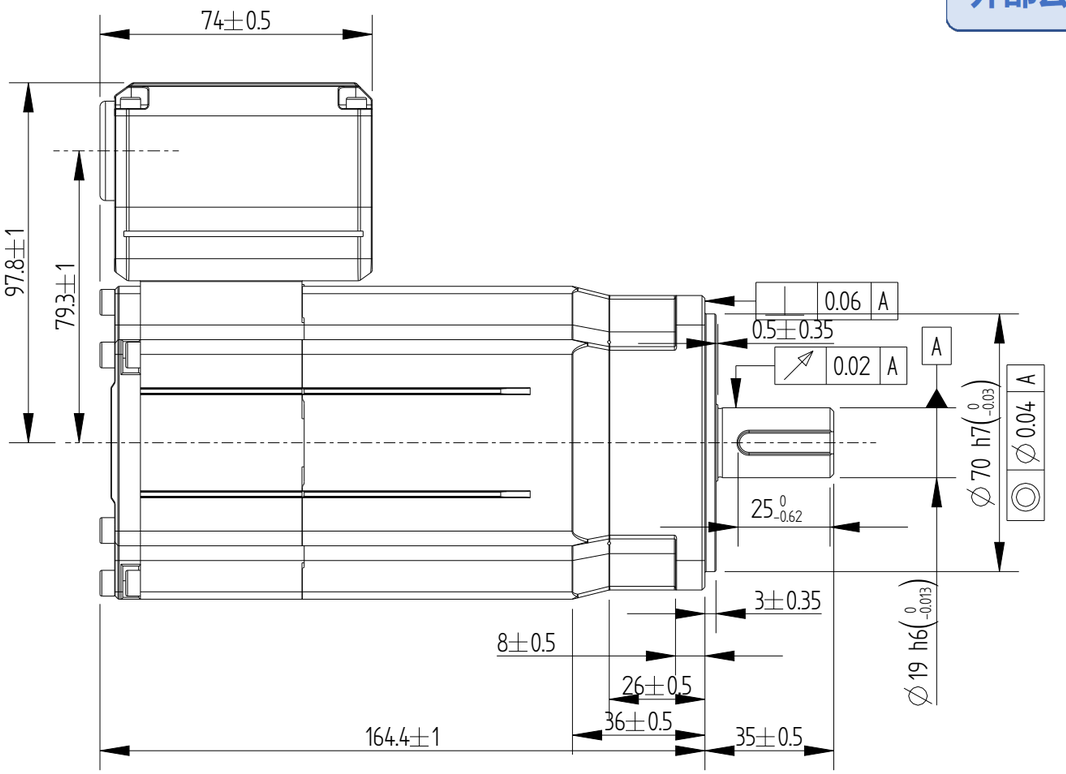



Basic function parameters	
Rated power Kw	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.37
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.52±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash °	/
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

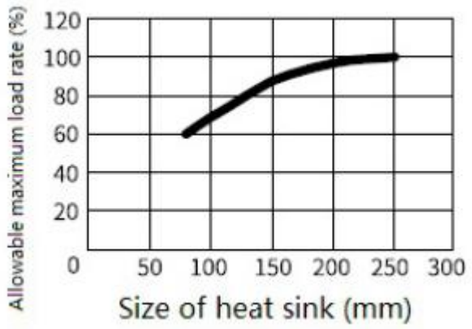

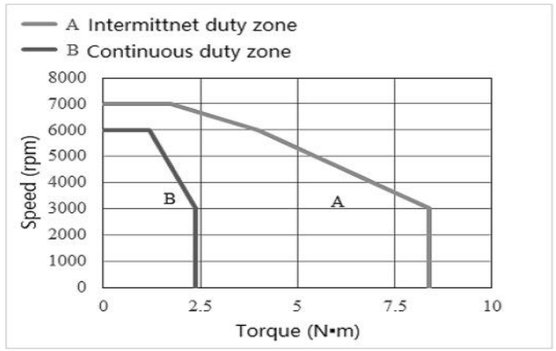



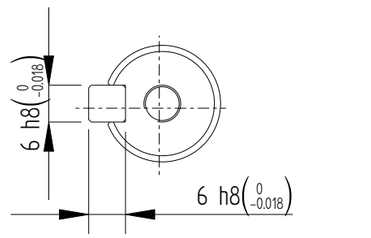

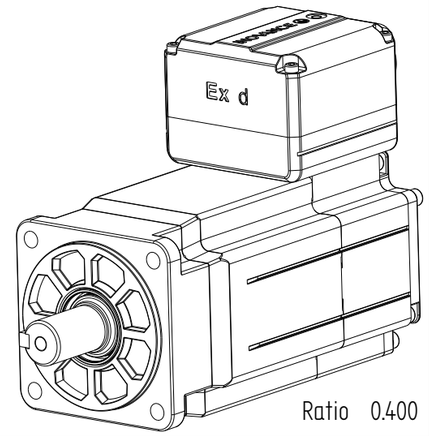

Ratio 0.400

				Outline drawing of the whole machine	0111BJ51-wx		
B00	New Archive	/	20260309				
Version	Alter mode	Changer	Date				
Design	/			/	Projection mark	INOVANCE	
Proofread	/						
Technological	/						
Check	/			Weight	Ratio	Version	The first page one page in total
Standardization	/			kg	1:2	B00	Product MS1H4-75B30CB-A331R-INT-EX d T4
Approve	/						

Inovance Technology Co., Ltd.

A3