
正样
2026.08.26
200


All rights reserved. Any infringement will be investigated.

Revise	Description


外部公开

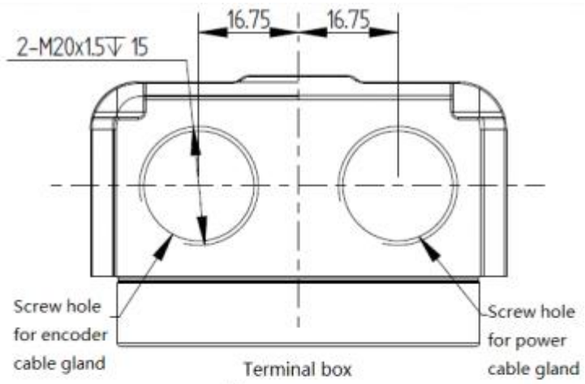


Terminal box

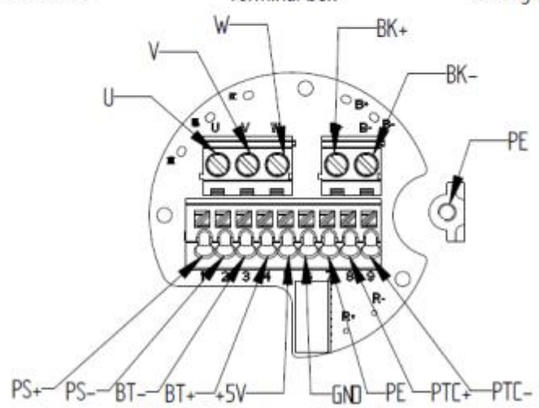



Terminal connector definition

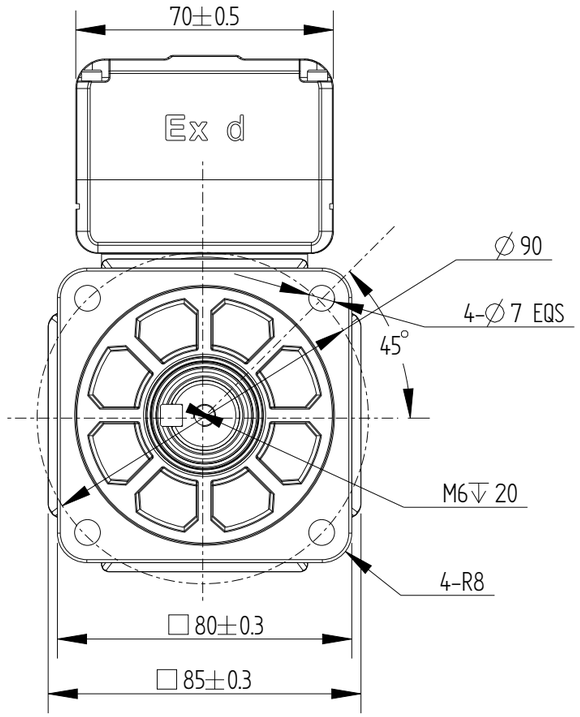


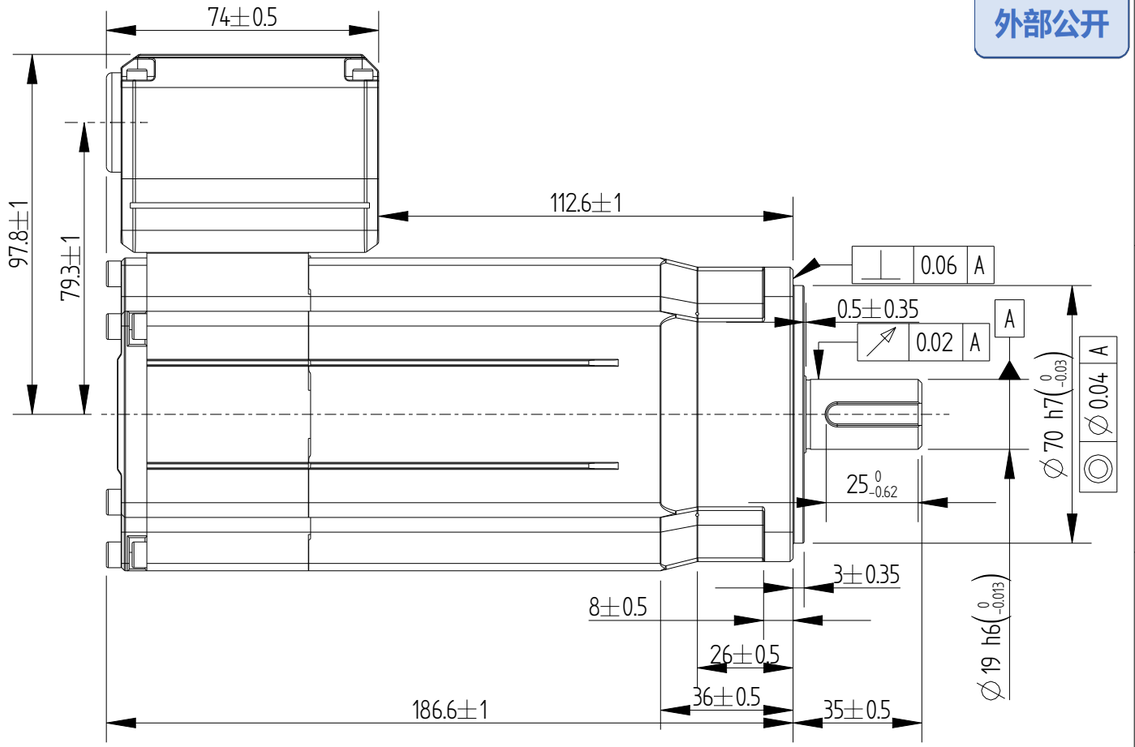


Basic function parameters	
Rated power Kw	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.37
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.55±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	≥3.2
Brake power supply V	DC24V±10%
Brake backlash °	≤1
Duty cycle	S1
Radial load N	≤392
Axial load N	≤147

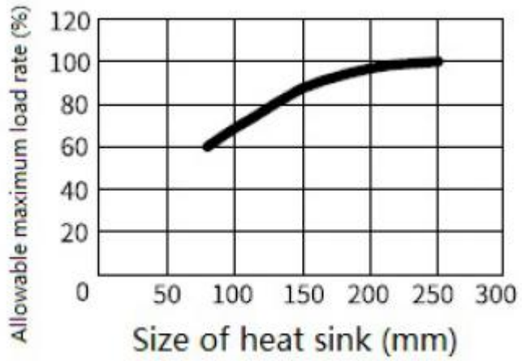

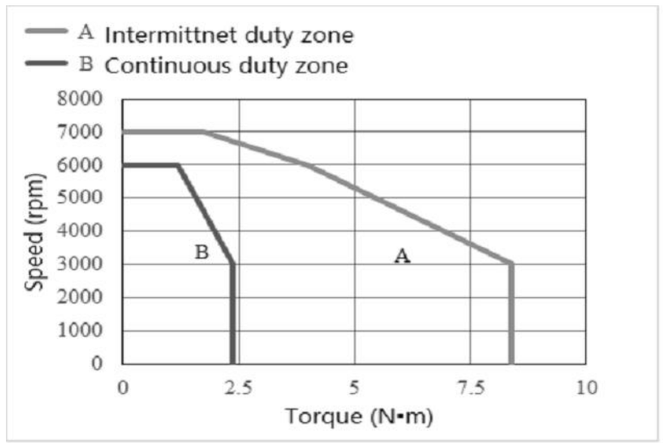




Axial end dimension drawing

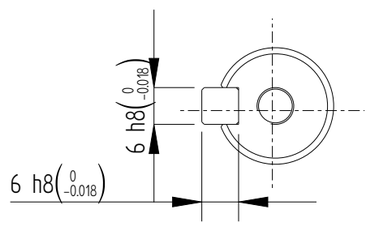

Axial end dimension drawing with key

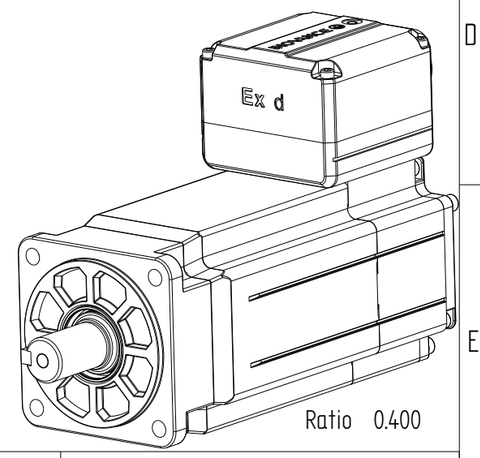

Ratio 0.400

				Outline drawing of the whole machine	0111BJ52-wx	
B00	New Archive	/	20260309			
Version	Alter mode	Changer	Date			
Design	/			/	Projection mark	INOVANCE
Proofread	/					
Technological	/					
Check	/			Weight	Ratio	Version
Standardization	/			kg	1:2	B00
Approve	/					

The first page one page in total

Product MS1H4-75B30CB-A334R-INT-EX d T4

Inovance Technology Co., Ltd.

A3