
正样
2026.08.26
300


All rights reserved. Any infringement will be investigated.


Inovance Technology Co., Ltd.


Revise	Description

外部公开

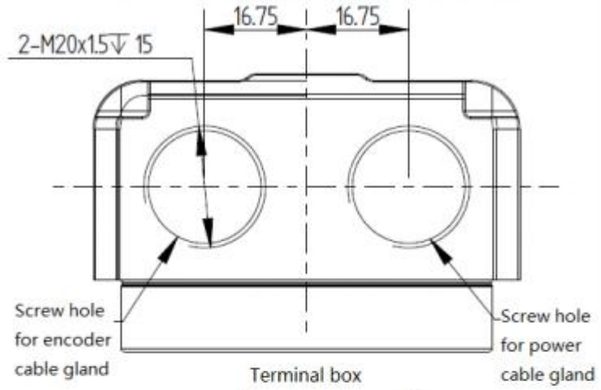


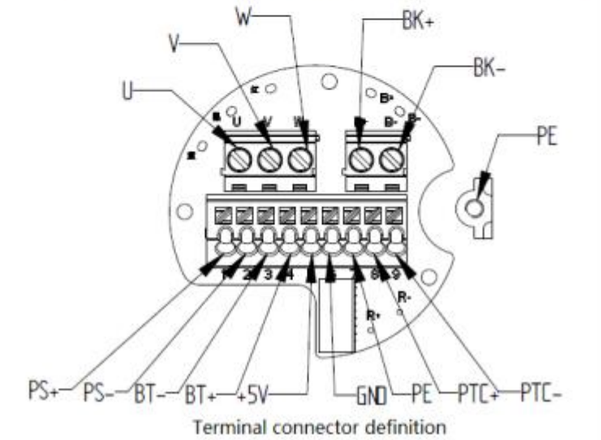


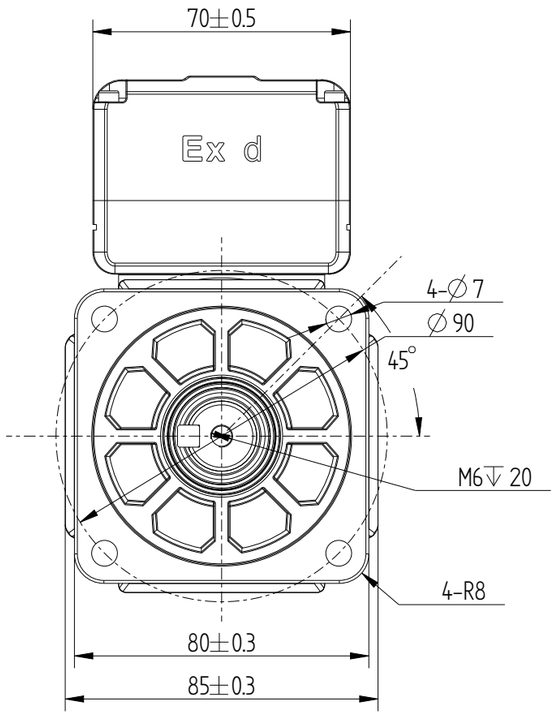


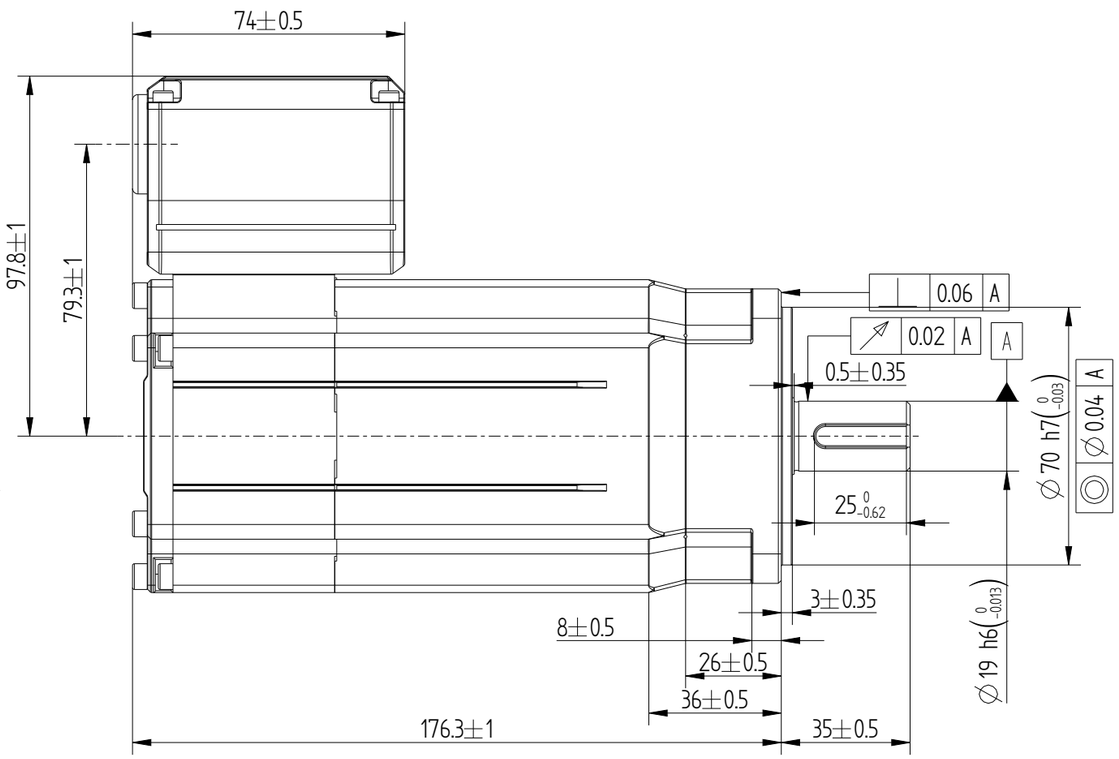


Basic function parameters	
Rated power Kw	1
Rated voltage V	220
Rated current A	6.5
Peak current at rated speed A	24.0
Rated torque Nm	3.18
Peak torque at rated speed Nm	9.54
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.96±10%
Encoder resolution	23bitF
Insulation Class	IP66/IP67
Protection class	/
Static torque of brake Nm	
Brake power supply V	DC24V±10%
Brake backlash °	/
Duty cycle	S1
Radial load N	≤392
Axial load N	≤147

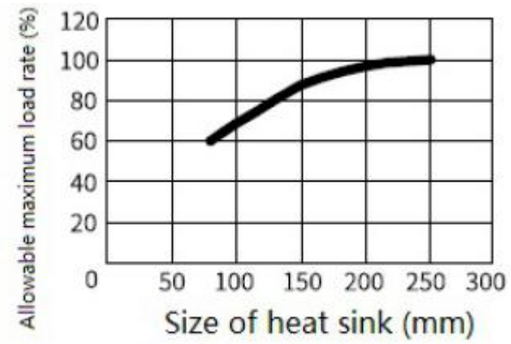

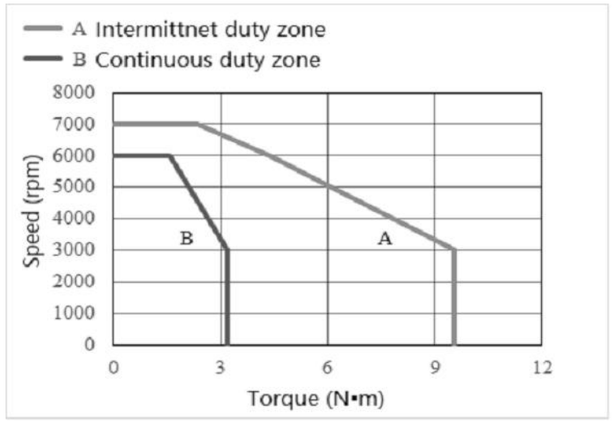




Axial end dimension drawing



Axial end dimension drawing with key

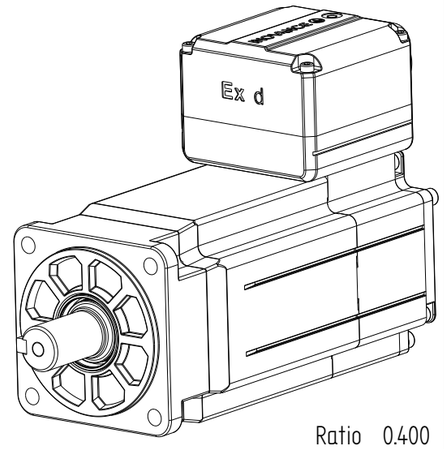

Ratio 0.400

				Outline drawing of the whole machine		0111BJ53-wx	
B00	New Archive	/	20260309				
Version	Alter mode	Changer	Date				
Design	/			/		Projection mark	INOVANCE
Proofread	/						
Technological	/						
Check	/			Weight	Ratio	Version	The first page one page in total
Standardization	/			kg	1:2	B00	Product MS1H4-10C30CB-A331R-INT-EX d T4
Approve	/						

A3