

正样
2026.08.26
300

All rights reserved. Any infringement will be investigated


Revise	Description


外部公开

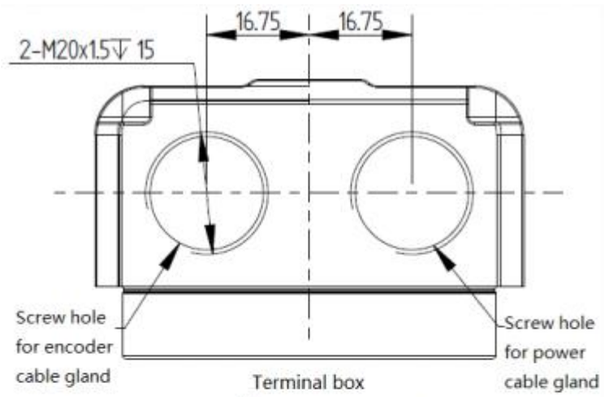

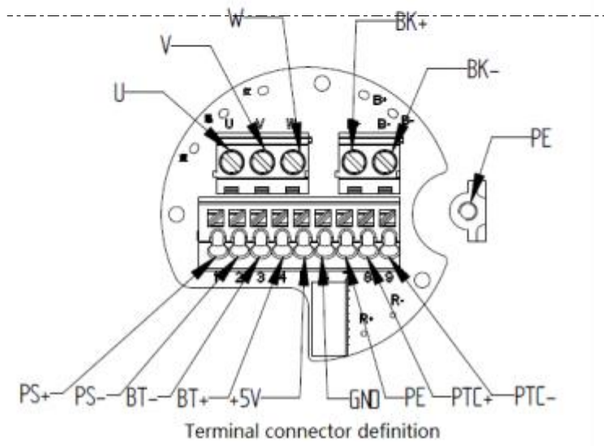



Terminal connector definition

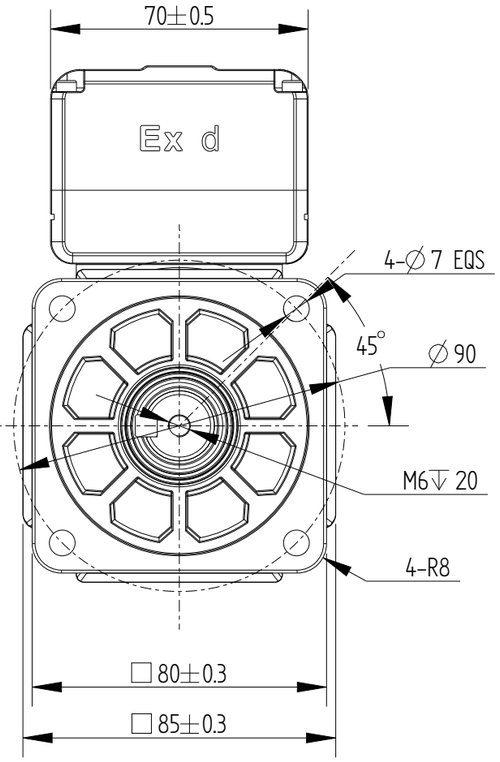


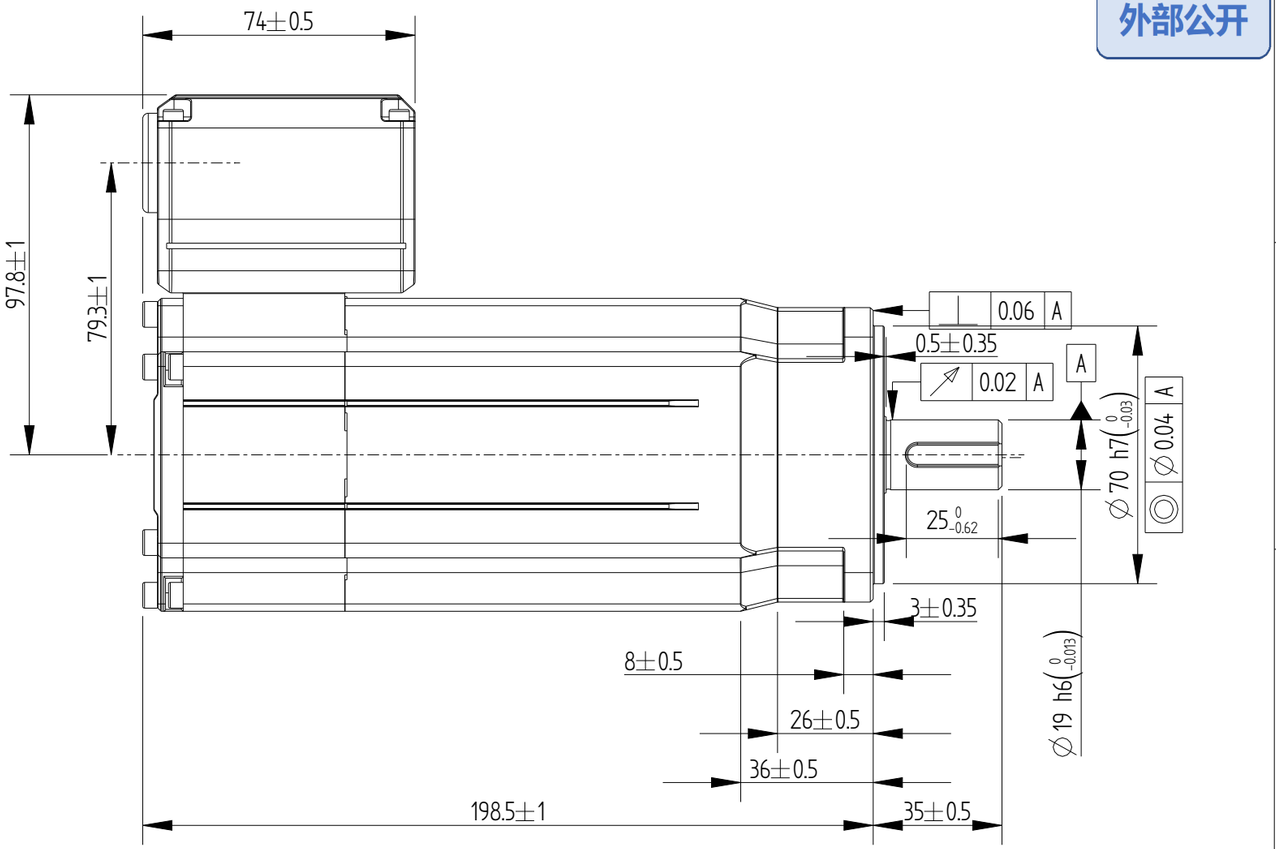


Basic function parameters	
Rated power Kw	1
Rated voltage V	220
Rated current A	6.5
Peak current at rated speed A	24.0
Rated torque Nm	3.18
Peak torque at rated speed Nm	9.54
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.99±10%
Encoder resolution	23bitF
Insulation Class	IP66/IP67
Protection class	≥3.2
Static torque of brake Nm	
Brake power supply V	DC24V±10%
Brake backlash °	≤1
Duty cycle	S1
Radial load N	≤392
Axial load N	≤147

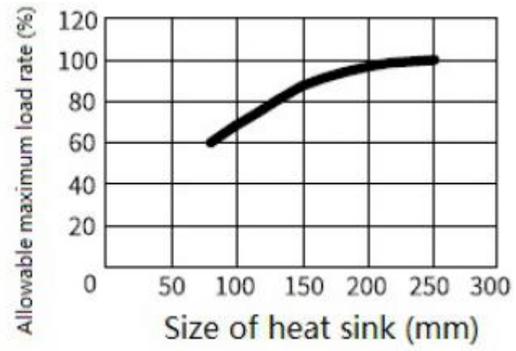

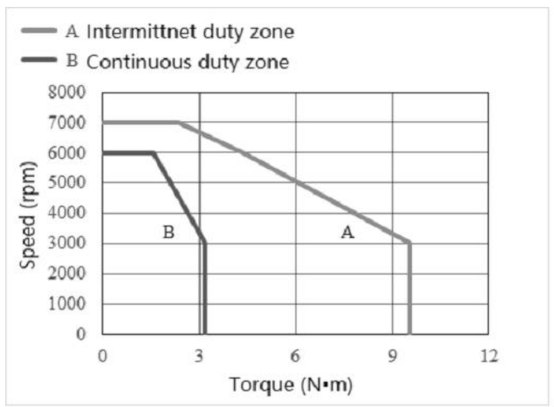




Axial end dimension drawing



Axial end dimension drawing with key

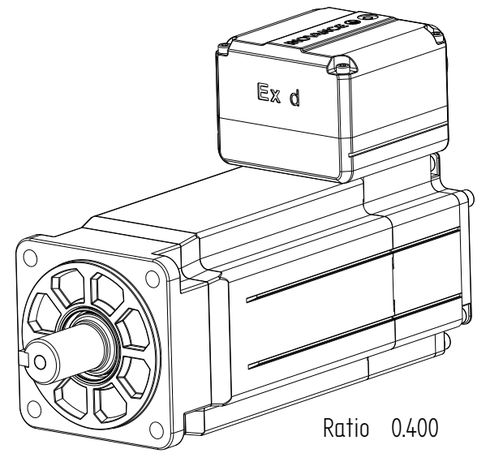

Ratio 0.400

B00	New Archive	/	20260309
Version	Alter mode	Changer	Date
Design	/		
Proofread	/		
Technological	/		
Check	/		
Standardization	/		
Approve	/		

Outline drawing of the whole machine				0111BJ54-wx
/				Projection mark
Weight	Ratio	Version	The first page one page in total	
kg	1:2	B00	Product	MS1H4-10C30CB-A334R-INT-EX d T4

INOVANCE

Inovance Technology Co., Ltd.

A3