

正样
2026.08.26
B00


Revise	Description

外部公开

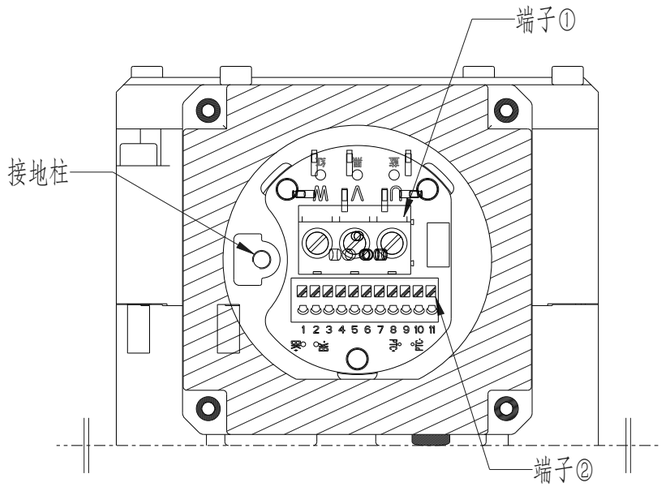


动力线缆接线定义			
端子①	U相	V相	W相
标志	U	V	W
动力线缆接线定义			
端子②	抱闸BK+	抱闸BK-	接地
标志	1	2	接线柱M5螺孔

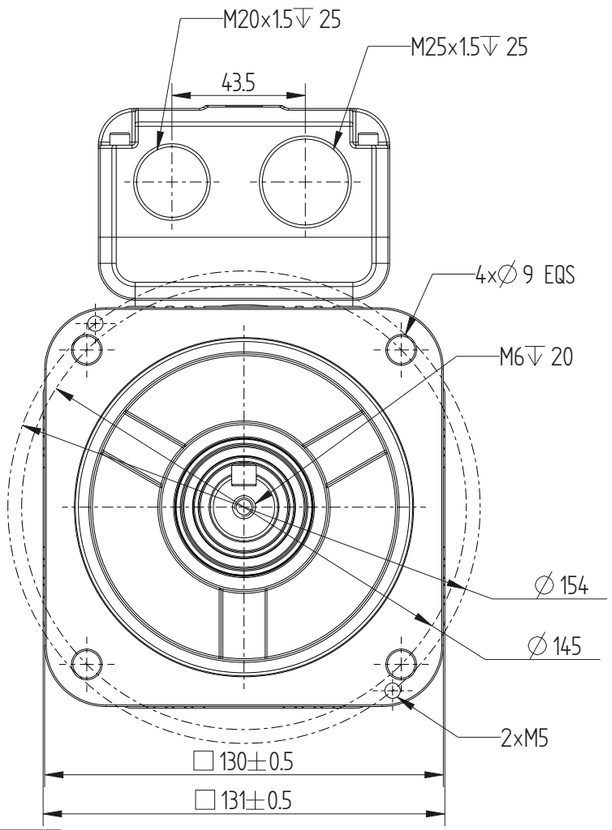


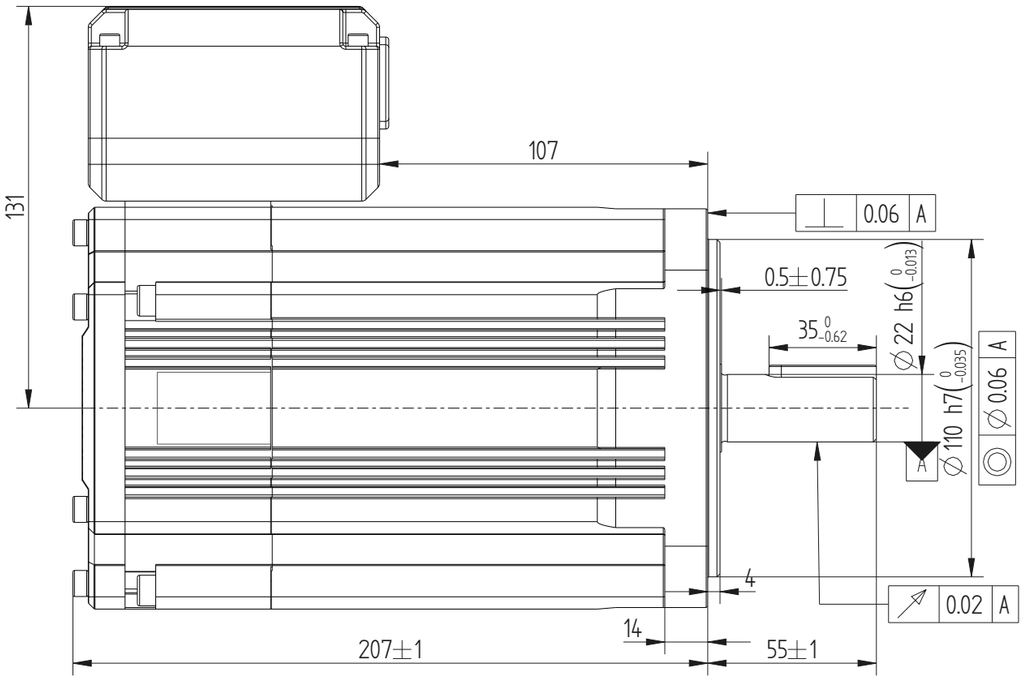


信号线缆接线定义									
端子②	PS+	PS-	BT-	BT+	+5V	GND	PE	PTC+	PTC-
标志	3	4	5	6	7	8	9	10	11

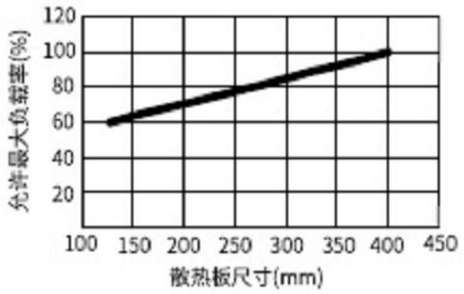


Motor parameter table	
Base	□130
Rated power Kw	1.3
Rated voltage V	380
Rated current A	5.1
Instantaneous maximum current A	12.6
Rated torque Nm	8.34
Instantaneous maximum torque Nm	20.85
Rated speed rpm	1500
Maximum speed rpm	4500
Rotor inertia kg · cm2	21.5±10%
Encoder bit count	23 positions
Insulation Class	F
Protection class	IP66/IP67
Brake static torque Nm	⩾16.5
Brake power supply V	DC24V±10%
Brake backlash °	1
Working system	S1

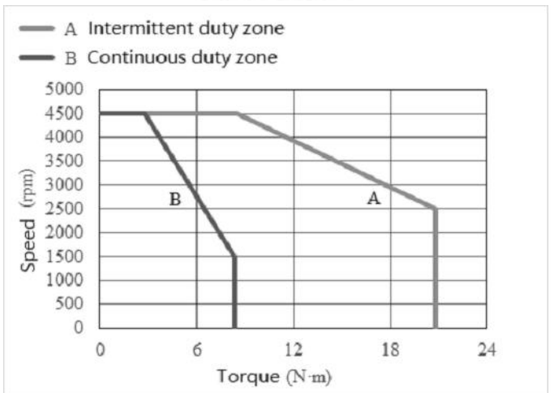




Axis end dimension diagram



Dimension diagram of shaft end with key

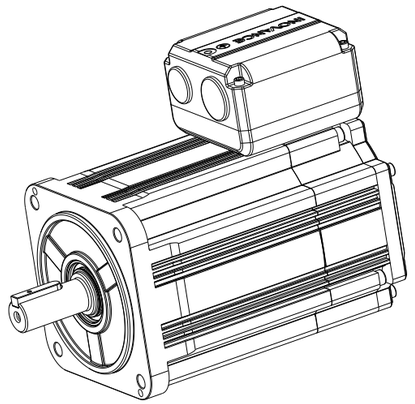

				整机外形图			0111BJ58-WX
B00	New Archive	/	20260113				
Version	Alter mode	Changer	Date				
Design	/			/			Projection mark
Proofread	/						INOVANCE
Technological	/						
Check	/			Weight	Ratio	Version	The first page one page in total
Standardization	/			11.4kg	1:2	B00	Product MS1H3-13C15□-A334R-INT-EX d T4
Approve	/						

All rights reserved. Any infringement will be prosecuted.
Inovance Technology Co., Ltd.