
正样
2026.08.26
B00

All rights reserved. Any infringement will be prosecuted.


Inovance Technology Co., Ltd.


Revise	Description

外部公开

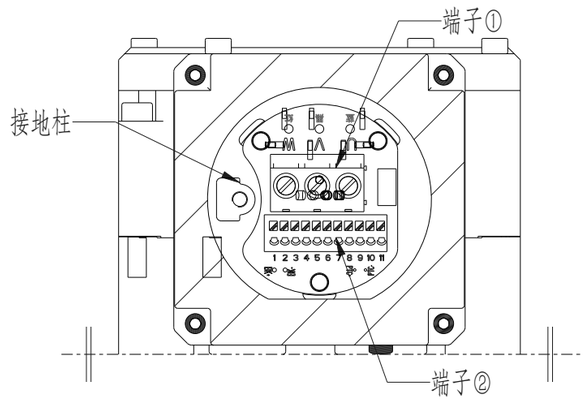


动力线缆接线定义			
端子①	U相	V相	W相
标志	U	V	W
动力线缆接线定义			
端子②	抱闸BK+	抱闸BK-	接地
标志	1	2	接线柱M5螺孔

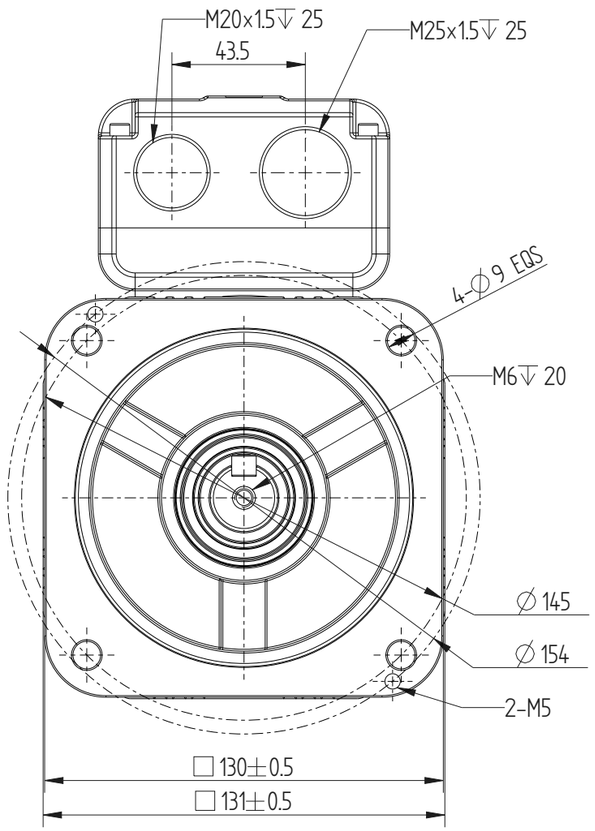


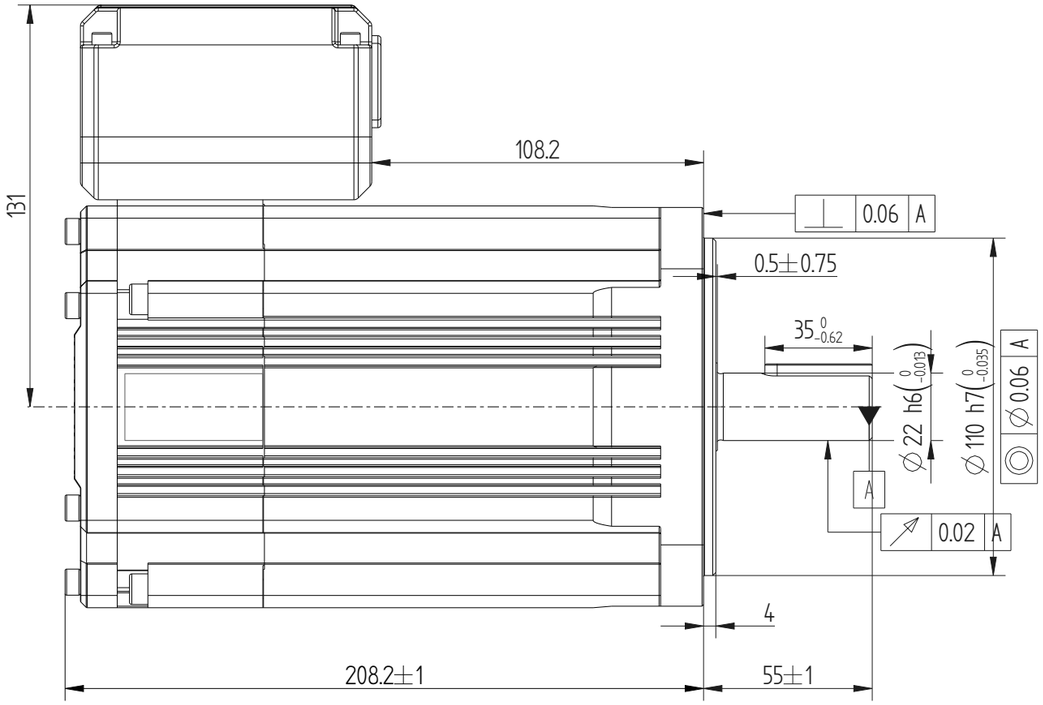


信号线缆接线定义									
端子②	PS+	PS-	BT-	BT+	+5V	GND	PE	PTC+	PTC-
标志	3	4	5	6	7	8	9	10	11


Motor parameter table	
Base	□130
Rated power Kw	1.8
Rated voltage V	380
Rated current A	6.75
Instantaneous maximum current A	17.7
Rated torque Nm	11.5
Instantaneous maximum torque Nm	28.75
Rated speed rpm	1500
Maximum speed rpm	4500
Rotor inertia kg · cm2	24.9±10%
Encoder bit count	23 positions
Insulation Class	F
Protection class	IP66/IP67
Brake static torque Nm	/
Brake power supply V	/
Brake backlash °	/
Working system	S1

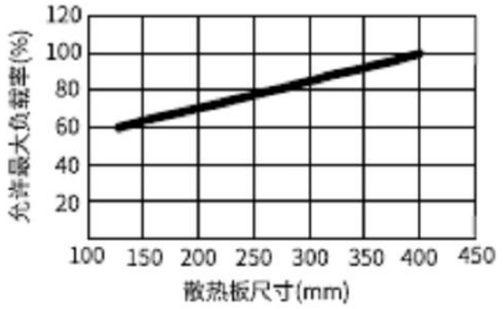

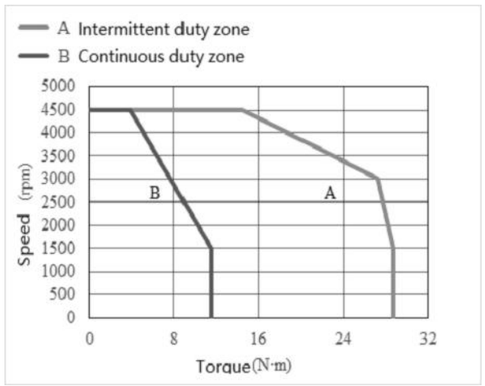


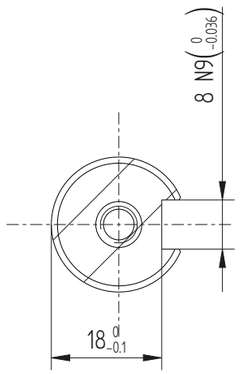

Axis end dimension diagram



Dimension diagram of shaft end with key

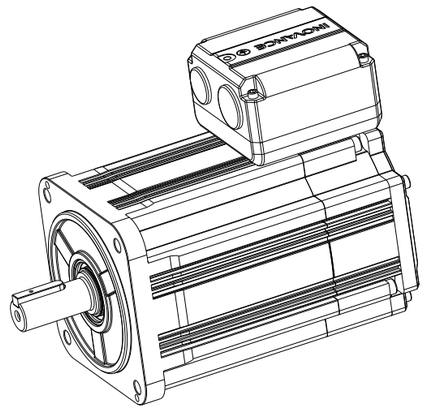

				Outline drawing of the whole machine	0111BJ59-WX
B00	New Archive	/	2026/01/13		
Version	Alter mode	Changer	Date		
Design	/			/	Projection mark
Proofread	/				INOVANCE
Technological	/				
Check	/			Weight	Ratio / Version / The first page one page in total
Standardization	/			11.15kg	1:2 / B00 / Product: MS1H3-18C15□-A331R-INT-EX d T4
Approve	/				