

正样
2025.08.26
500


All rights reserved. Any infringement will be investigated.


Revise	Description

外部公开

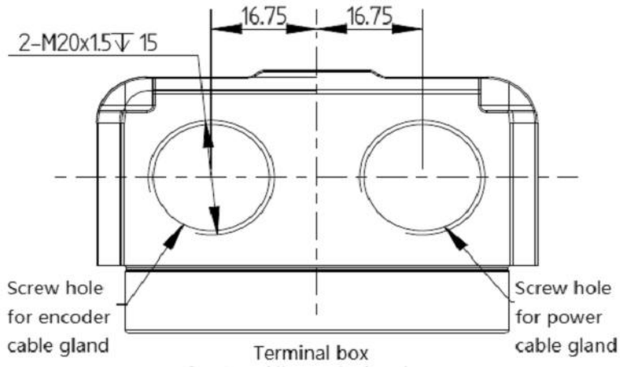


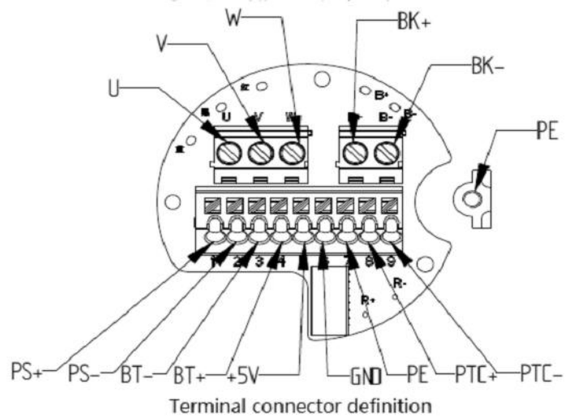


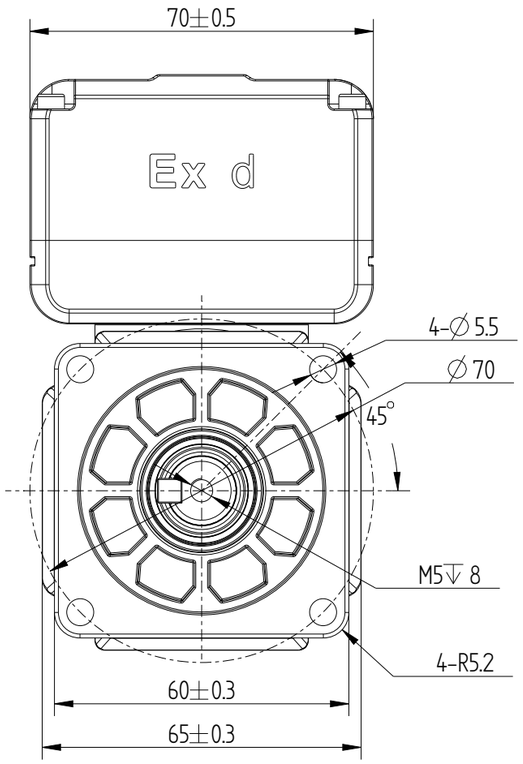


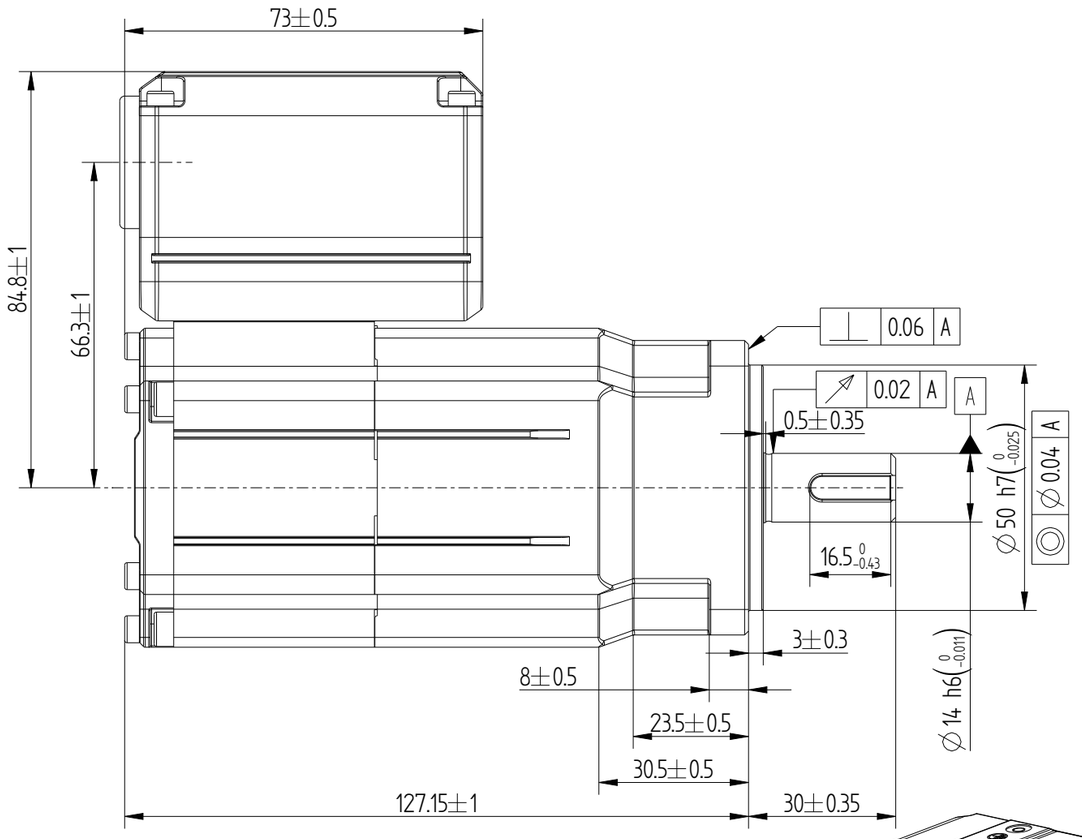



Basic function parameters	
Rated power kW	0.2
Rated voltage V	220
Rated current A	1.3
Peak current at rated speed A	5.3
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.22±10%
Encoder resolution	23bit
Insulation class	F
Protection class	IP67
Static torque of brake Nm	/
Brake backlash°	/
Brake power supply V	/
Duty cycle	S1
Radial load N	⩽245
Axial load N	⩽74

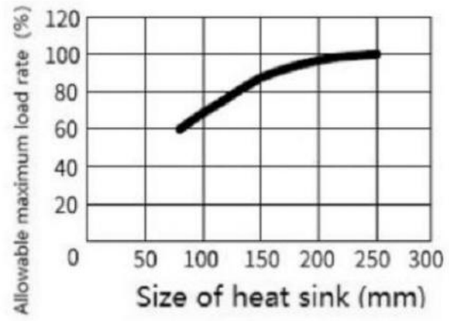

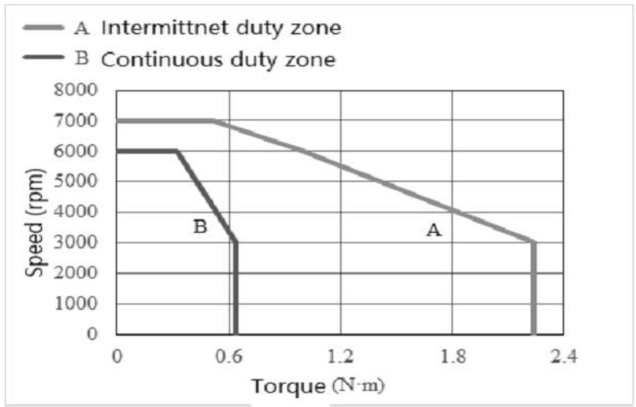





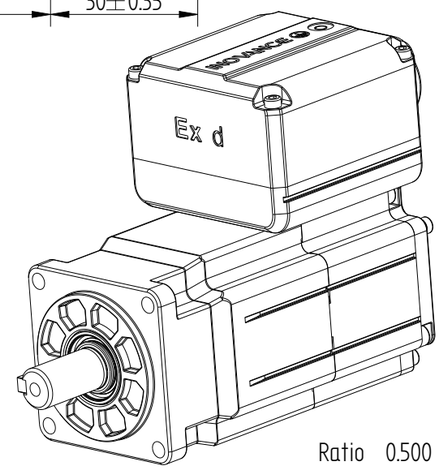

Ratio 0.500

				Outline drawing of the whole machine	0111BJ75-WX	
B00	New Archive	/				
Version	Alter mode	Changer	Date			
Design	/			/	Projection mark	INOVANCE
Proofread	/					
Technological	/					
Check	/			Weight	Ratio	Version	The first page one page in total
Standardization	/			kg	1:2	B00	Product	MS1H4-20B30CB-A331R-INT-EX d T5
Approve	/					

Inovance Technology Co., Ltd.

A3