
正样
2026.08.26
800

All rights reserved. Any infringement will be prosecuted.


Inovance Technology Co., Ltd.


| Revise | Description |
|---|---|
| | |

外部公开

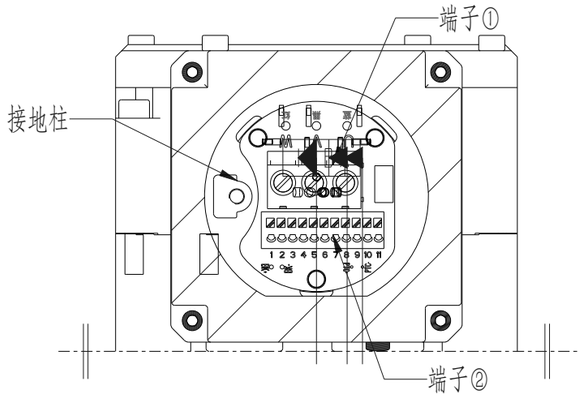



| 动力线缆接线定义 | | | |
|---|---|---|---|
| 端子① | U相 | V相 | W相 |
| 标志 | U | V | W |
| 动力线缆接线定义 | | | |
| 端子② | 抱闸BK+ | 抱闸BK- | 接地 |
| 标志 | 1 | 2 | 接线柱M5螺孔 |

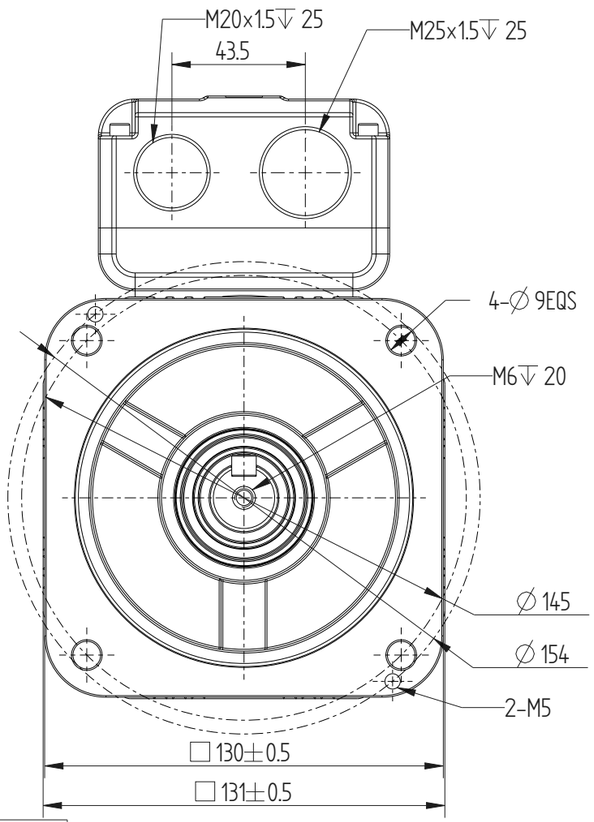


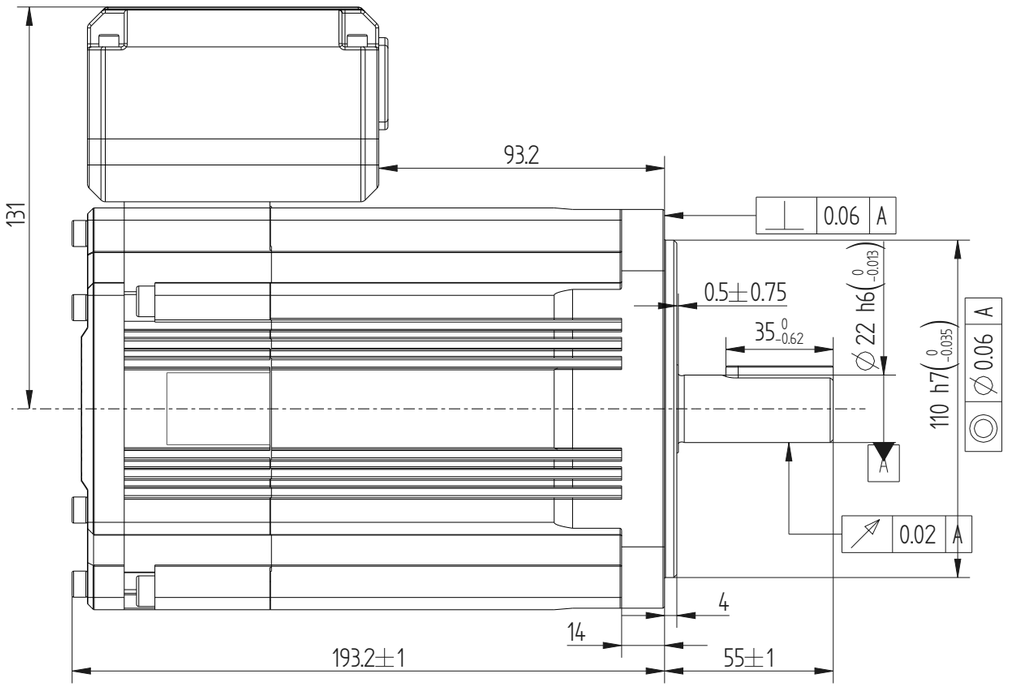


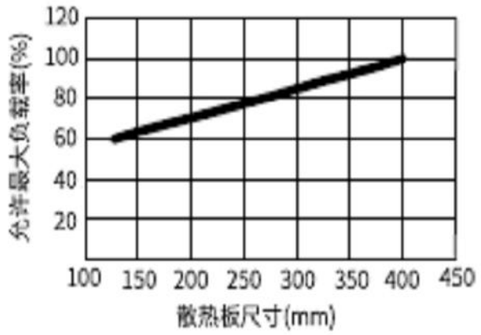

| 信号线缆接线定义 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 端子② | PS+ | PS- | BT- | BT+ | +5V | GND | PE | PTC+ | PTC- |
| 标志 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |

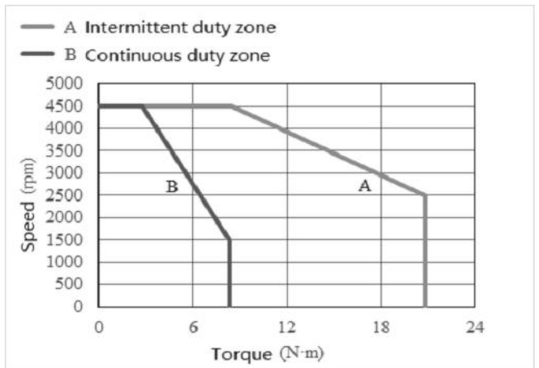



| Motor parameter table | |
|---|---|
| Base | □130 |
| Rated power Kw | 1.3 |
| Rated voltage V | 380 |
| Rated current A | 5.1 |
| Instantaneous maximum current A | 12.6 |
| Rated torque Nm | 8.34 |
| Instantaneous maximum torque Nm | 20.85 |
| Rated speed rpm | 1500 |
| Maximum speed rpm | 4500 |
| Rotor inertia kg · cm2 | 19.25±10% |
| Encoder bit count | 23positions |
| Insulation Class | F |
| Protection class | IP66/IP67 |
| Brake static torque Nm | / |
| Brake power supply V | / |
| Brake backlash ° | / |
| Working system | S1 |





Axis end dimension diagram




Dimension diagram of shaft end with key

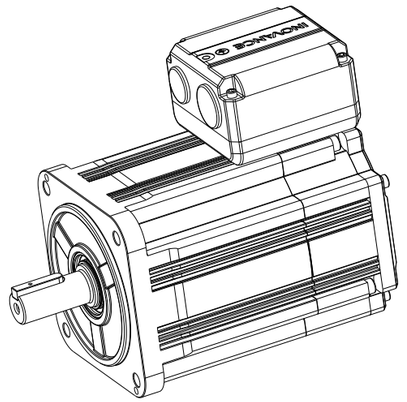

| | | | | 整机外形图 | 0111BJ85-WX | | |
|---|---|---|---|---|---|---|---|
| B00 | New Archive | / | 2026.01.13 | | | | |
| Version | Alter mode | Changer | Date | | | | |
| Design | / | | | / | Projection mark | INOVANCE | |
| Proofread | / | | | | | | |
| Technological | / | | | | | | |
| Check | / | | | Weight | Ratio | Version | The first page one page in total |
| Standardization | / | | | kg | 1:2 | B00 | Product MS1H3-13C15□-A331R-INT-EX d T4 |
| Approve | / | | | | | | |

A3