
正样
2026.09.29
300

All rights reserved. Any infringement will be prosecuted.


Inovance Technology Co., Ltd.


Revise	Description

外部公开

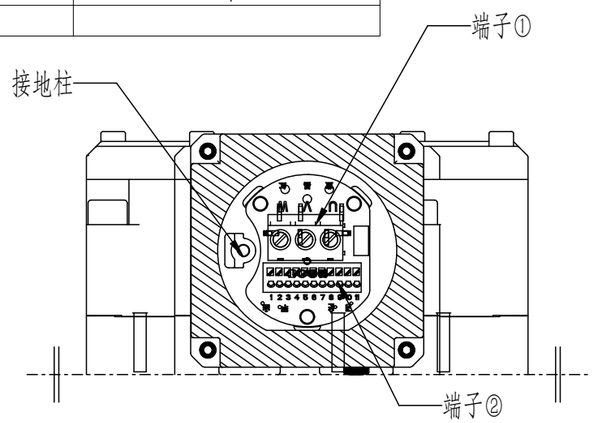


动力线缆接线定义			
端子①	U相	V相	W相
标志	U	V	W
动力线缆接线定义			
端子②	抱闸BK+	抱闸BK-	接地
标志	1	2	接线柱M5螺孔

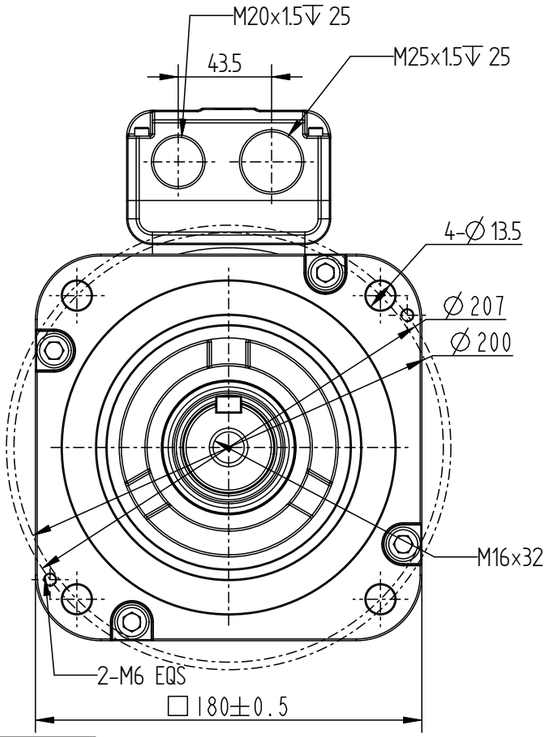


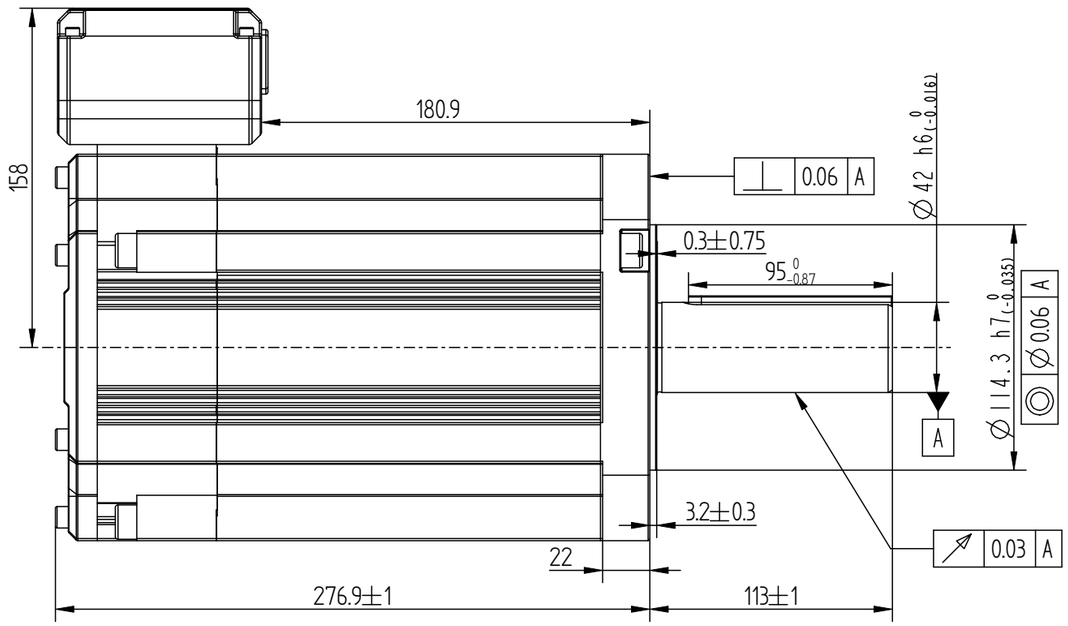



Wiring definition of signal cable									
Terminal②	DATA+	DATA-	CLOCK-	CLOCK+	+5V	GND	PE	PTC+	PTC-
Sign	3	4	5	6	7	8	9	10	11


Basic function parameters	
Rated power kW	5.5
Rated voltage V	380
Rated current A	20.7
Peak current at rated speed A	52
Rated torque Nm	35
Peak torque at rated speed Nm	87.6
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg · cm^2	94.55±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection class	IP66/IP67
Static torque of brake Nm	≥55
Brake power supply V	DC24V±10%
Brake backlash°	≤1
Duty cycle	S1
Radial load N	≤1764
Axial load N	≤588

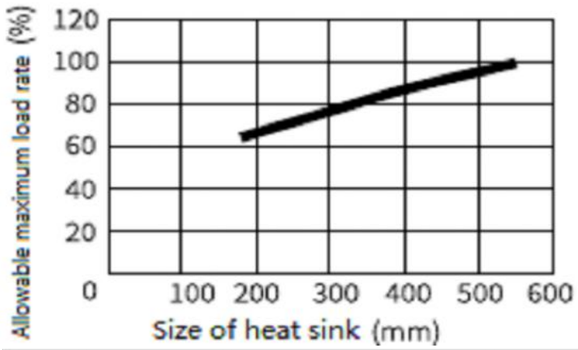

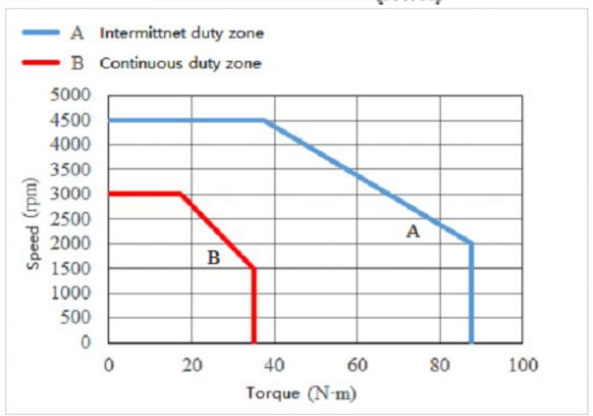





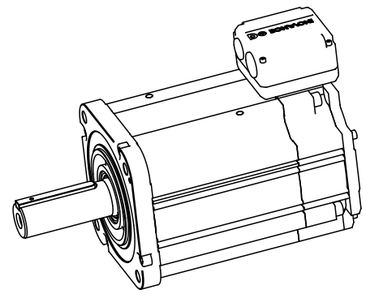

				Outline drawing of the whole machine	0111BK62-WX
B00	New Archive	/	20260920		
Version	Alter mode	Changer	Date		
Design	/			/	Projection mark
Proofread	/				
Technological	/				
Check	/			Weight	Ratio / Version / The first page one page in total
Standardization	/			30.95kg	1:2 / B00 / Product: MS1H3-55C15CD-0334R-INT-EX d T4
Approve	/				

INOVANCE