

正样
2026.10.09
300


All rights reserved. Any infringement will be investigated.


Revise	Description


外部公开

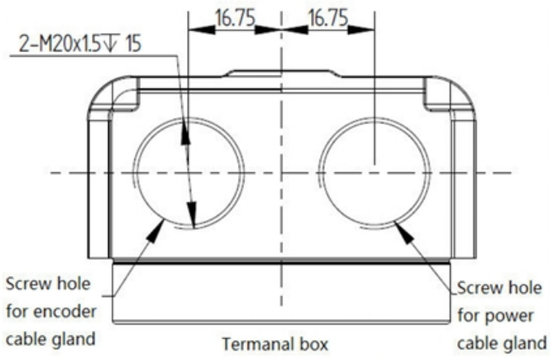

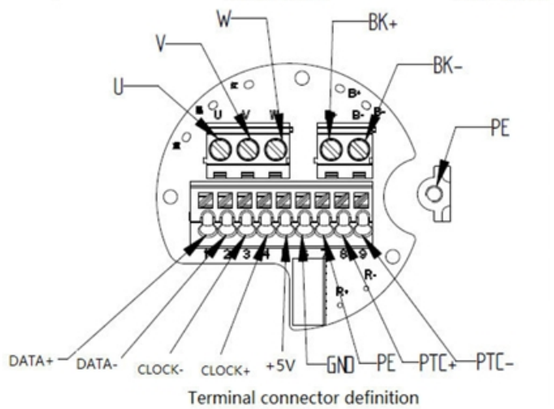


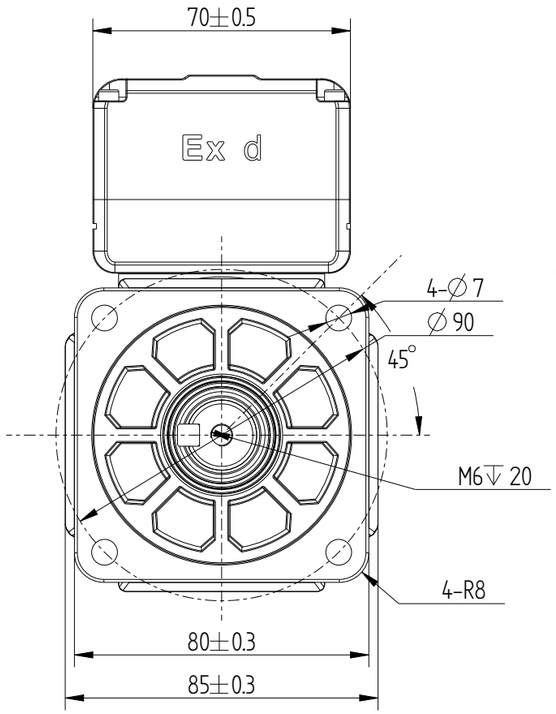


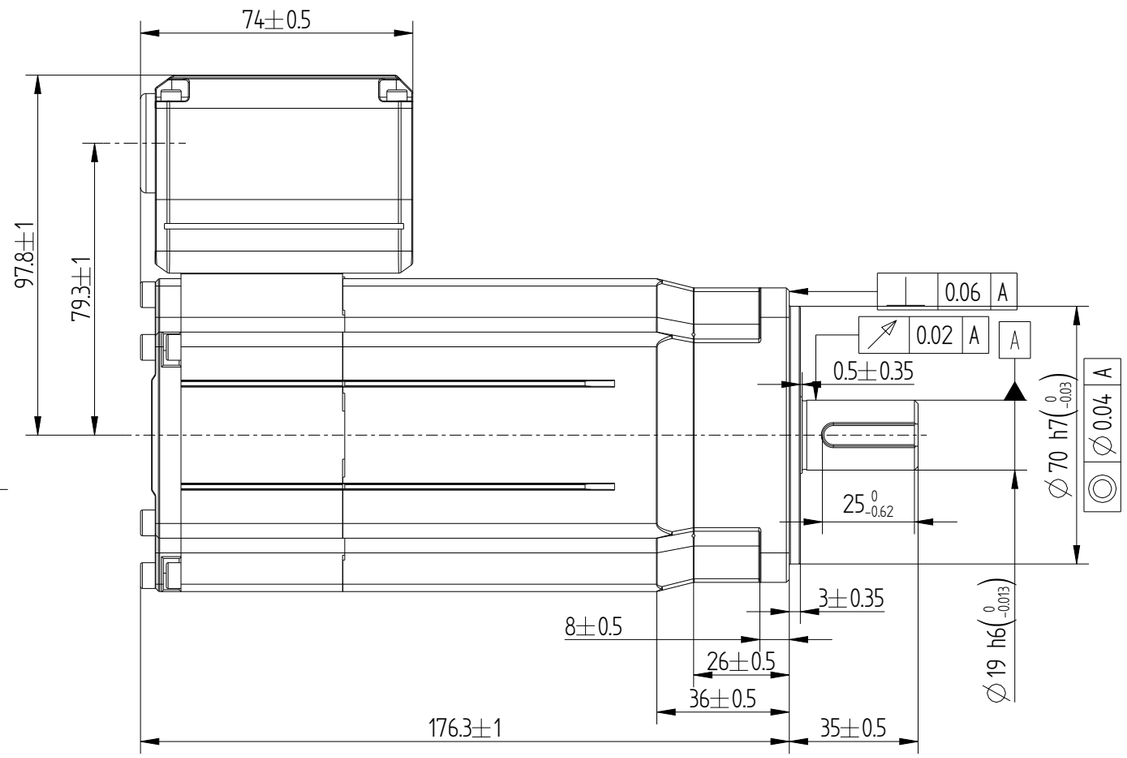

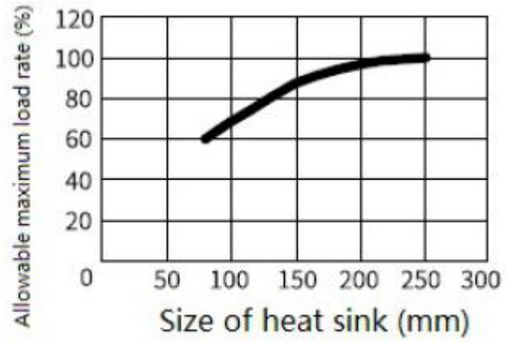


Basic function parameters	
Rated power Kw	0.9
Rated voltage V	220
Rated current A	5.85
Peak current at rated speed A	24.0
Rated torque Nm	2.86
Peak torque at rated speed Nm	9.54
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.96±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	/
Brake power supply V	DC24V±10%
Brake backlash °	/
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

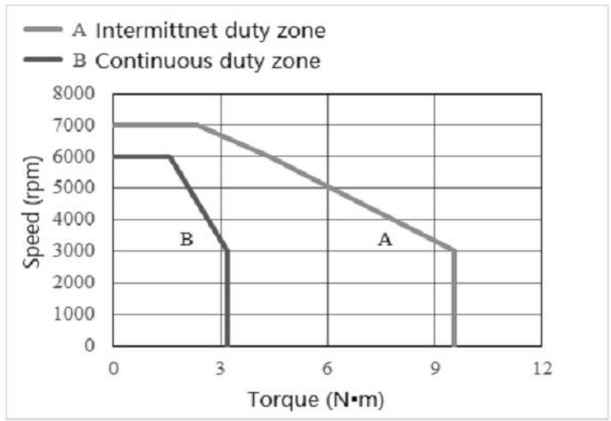




Axial end dimension drawing



Axial end dimension drawing with key

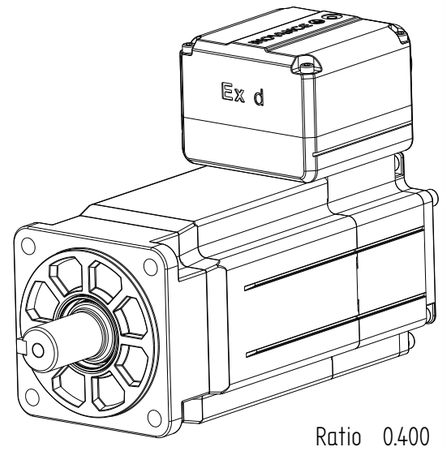

Ratio 0.400

				Outline drawing of the whole machine		0111BK77-WX	
B00	New Archive	/	20260921				
Version	Alter mode	Changer	Date			Projection mark	INOVANCE
Design	/			/			
Proofread	/						
Technological	/						
Check	/			Weight	Ratio	Version	The first page one page in total
Standardization	/			4.15kg	1:2	B00	Product MS1H4-90B30CB-D331R-INT-EX d T5
Approve	/						

Inovance Technology Co., Ltd.

A3