

正样
2026.10.09
300


All rights reserved. Any infringement will be investigated.


| Revise | Description |
|---|---|
| | |


外部公开

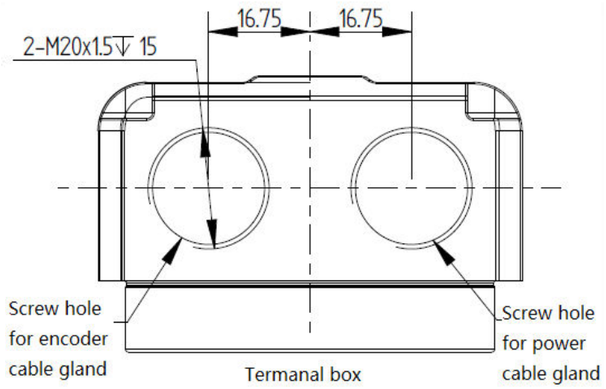


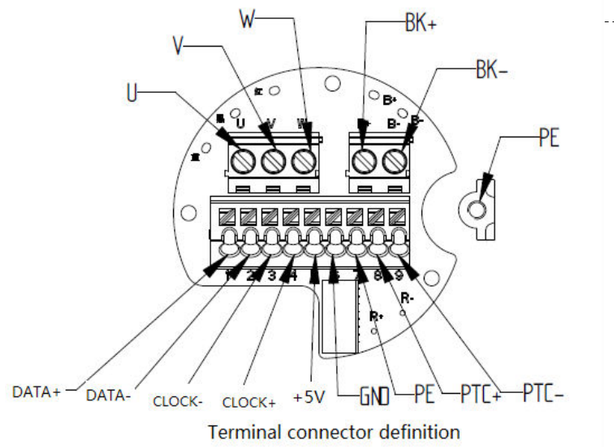


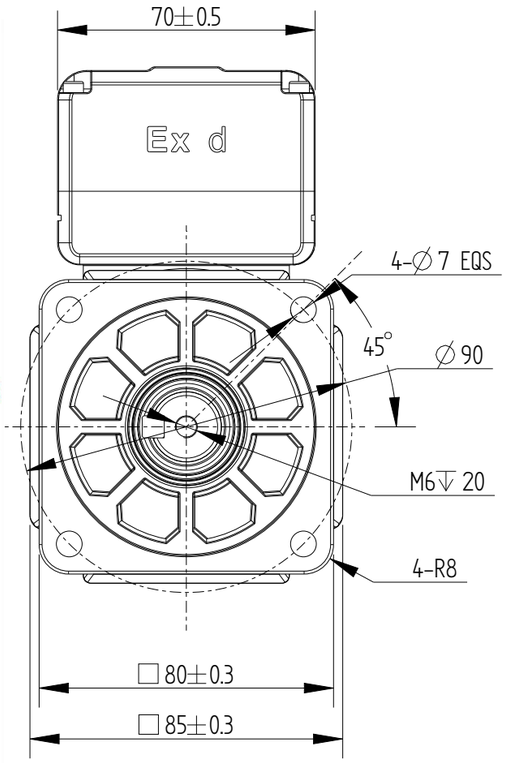



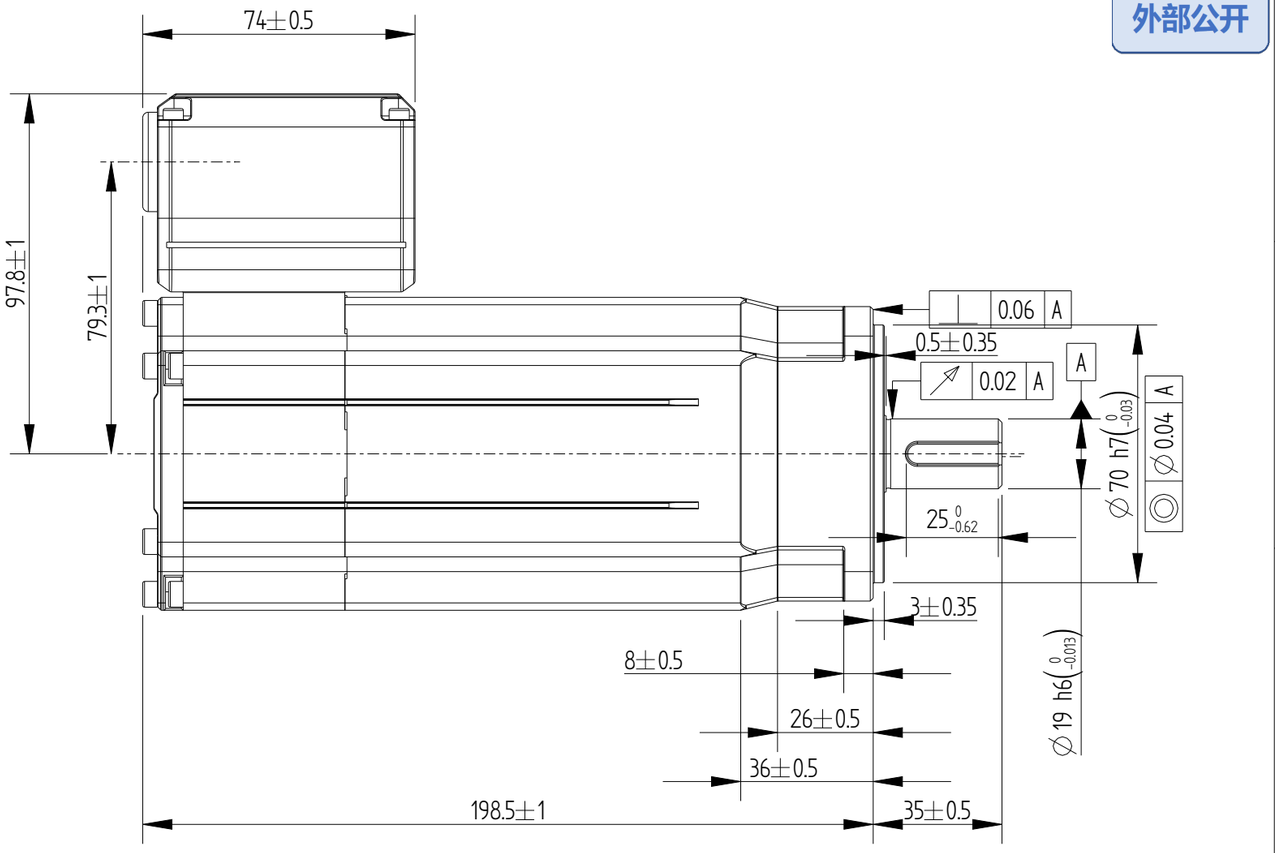
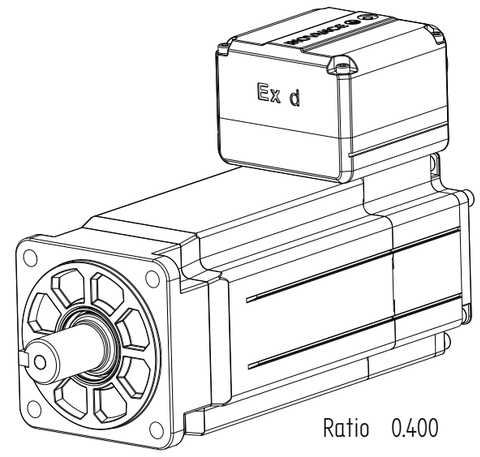

| Basic function parameters | |
|---|---|
| Rated power Kw | 1 |
| Rated voltage V | 220 |
| Rated current A | 6.5 |
| Peak current at rated speed A | 24.0 |
| Rated torque Nm | 3.18 |
| Peak torque at rated speed Nm | 9.54 |
| Rated speed rpm | 3000 |
| Max speed rpm | 7000 |
| Rotor inertia kg · cm2 | 1.99±10% |
| Encoder resolution | 23bit |
| Insulation Class | F |
| Protection class | IP66/IP67 |
| Static torque of brake Nm | ≥3.2 |
| Brake power supply V | DC24V±10% |
| Brake backlash ° | ≤1 |
| Duty cycle | S1 |
| Radial load N | ≤392 |
| Axial load N | ≤147 |

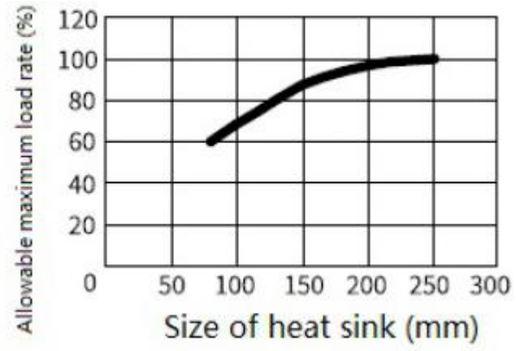

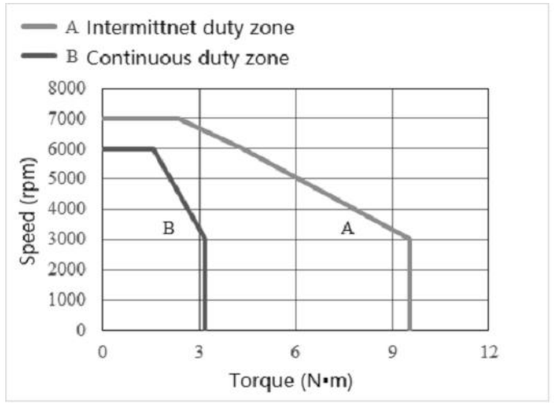Axial end dimension drawing



Axial end dimension drawing with key



Ratio 0.400

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | Outline drawing of the whole machine | 0111BK83-wx | |
| B00 | New Archive | / | 20260920 | | | |
| Version | Alter mode | Changer | Date | | | |
| Design | / | | | / | Projection mark | INOVANCE |
| Proofread | / | | | | | |
| Technological | / | | | | | |
| Check | / | | | Weight | Ratio | Version |
| Standardization | / | | | 4.75kg | 1:2 | B00 |
| Approve | / | | | | | |

The first page one page in total

Product MS1H4-10C30CB-D334R-INT-EX d T4

Inovance Technology Co., Ltd.

A3