

正样
2026.09.29
B00


Revise	Description


外部公开


All rights reserved. Any infringement will be investigated.

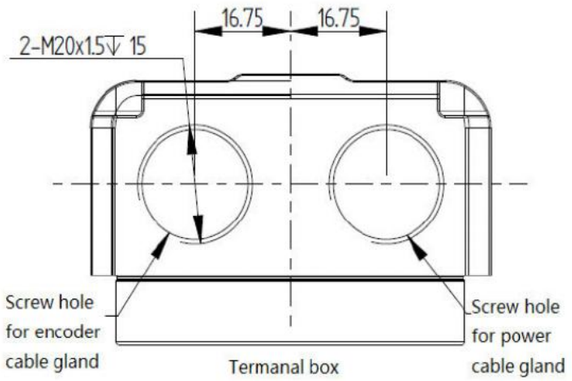


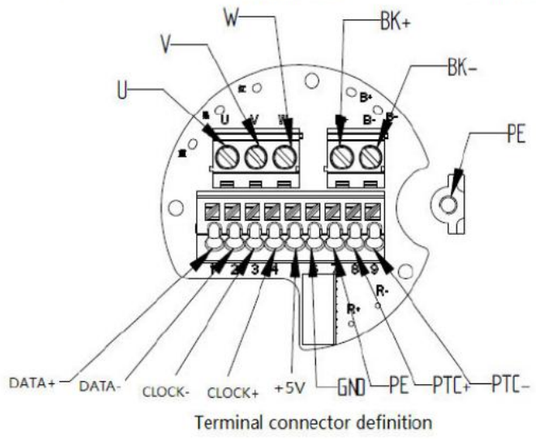

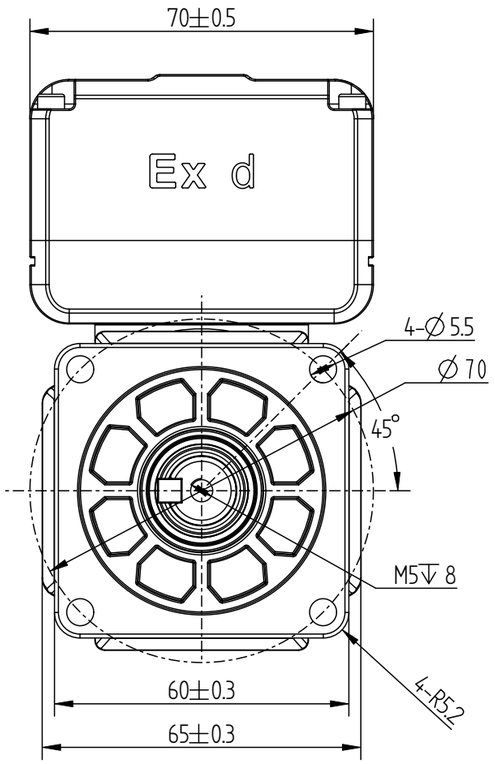


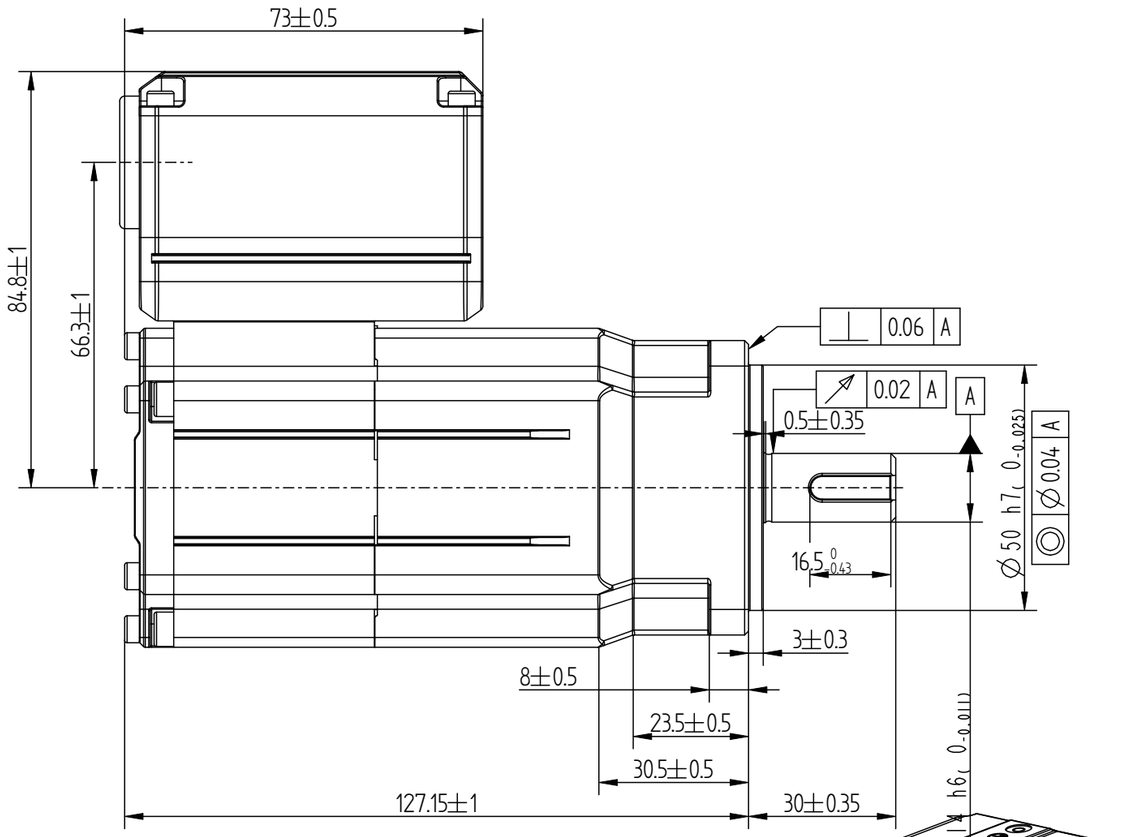

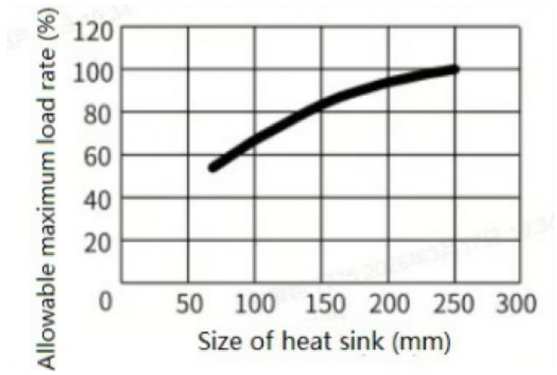


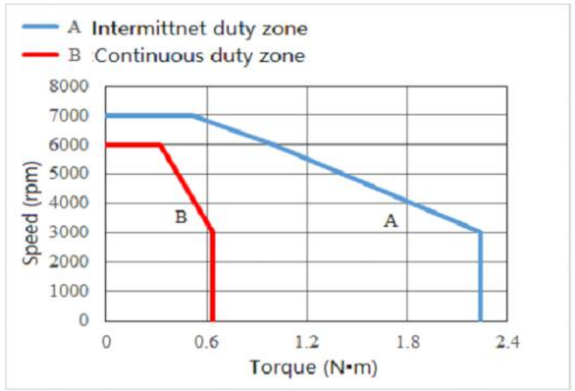


Basic function parameters	
Rated power Kw	0.2
Rated voltage V	220
Rated current A	1.3
Peak current at rated speed A	5.3
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.22±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash °	/
Duty cycle	S1
Radial load N	≤245
Axial load N	≤74



Axial end dimension drawing



Axial end dimension drawing with key

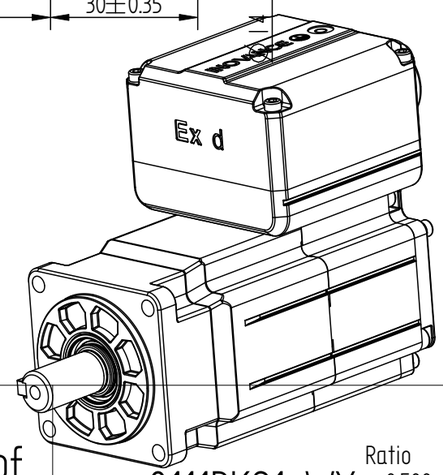

B00	New Archive	/	20260920
Version	Alter mode	Changer	Date
Design	/		
Proofread	/		
Technological	/		
Check	/		
Standardization	/		
Approve	/		

Outline drawing of the whole machine

0111BK91-WX

Ratio 0.500

/

Projection mark

INOVANCE

Weight	Ratio	Version	The first page one page in total
kg	1:2	B00	Product: MS1H4-20B30CB-D331R-INT-EX d T5

Inovance Technology Co., Ltd.

A3