
正样
2026.09.29
300

All rights reserved. Any infringement will be investigated.


Inovance Technology Co., Ltd.

Revise	Description


外部公开

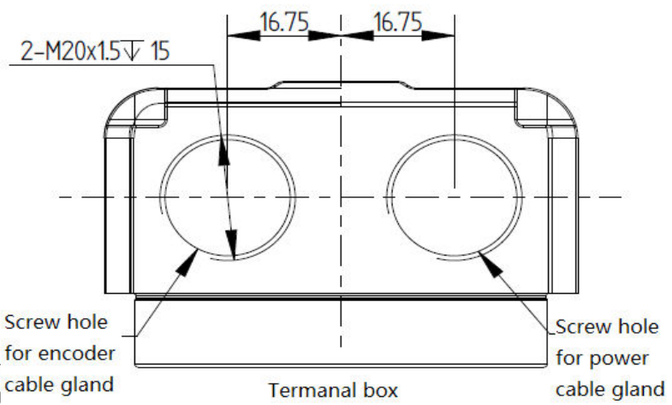



Termanal box

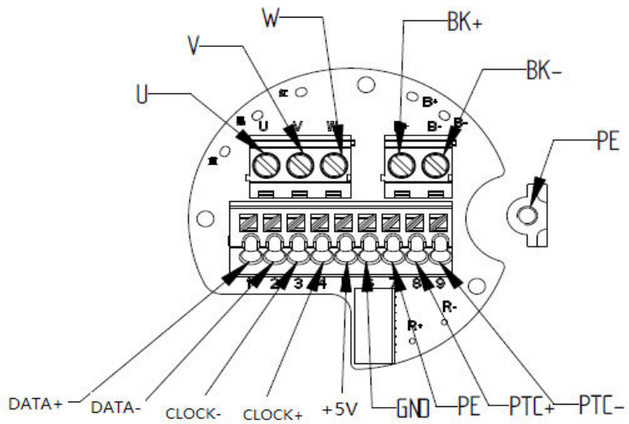


Terminal connector definition

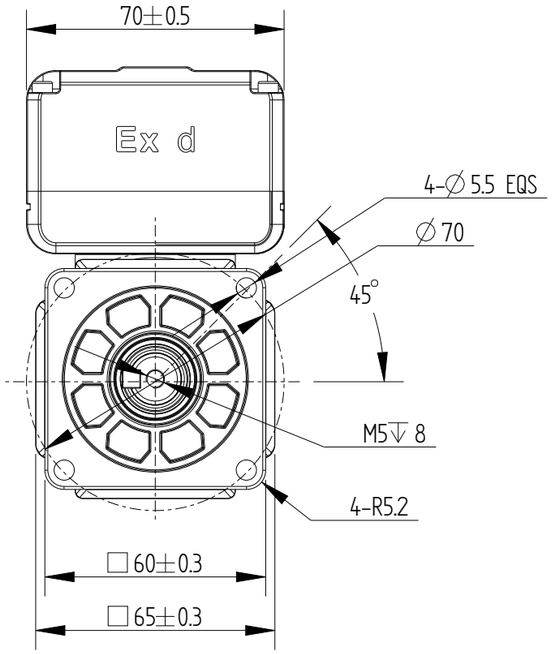


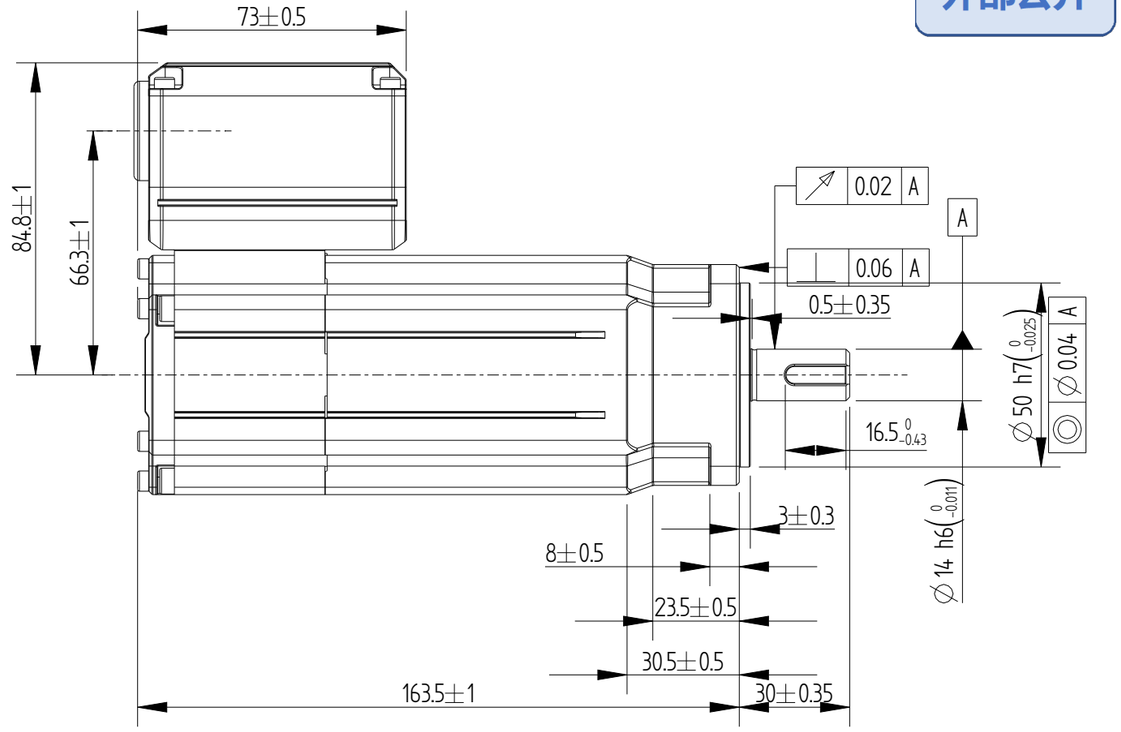

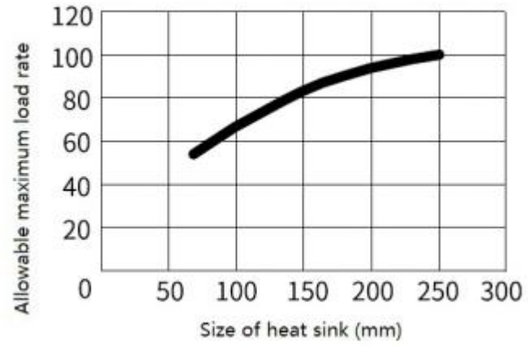

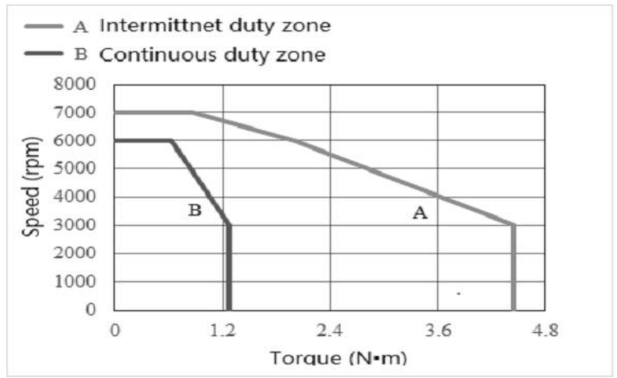


Basic function parameters	
Rated power Kw	0.4
Rated voltage V	220
Rated current A	2.4
Peak current at rated speed A	9.2
Rated torque Nm	1.27
Peak torque at rated speed Nm	4.45
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.45±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	⩾1.5
Brake power supply V	DC24V±10%
Brake backlash °	⩽1
Duty cycle	S1
Radial load N	⩽245
Axial load N	⩽74

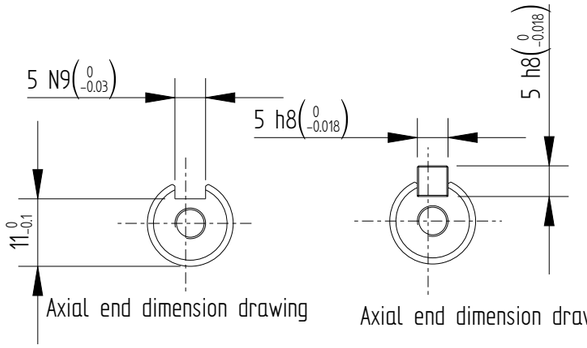

Axial end dimension drawing

Axial end dimension drawing with key

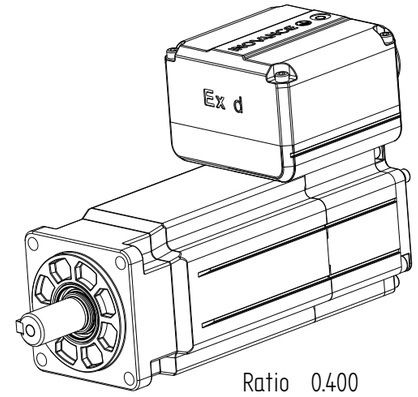

Ratio 0.400

B00	New Archive	/	20260309
Version	Alter mode	Changer	Date
Design	/		
Proofread	/		
Technological	/		
Check	/		
Standardization	/		
Approve	/		

Outline drawing of the whole machine

0111BK92-WX

/

Projection mark

INOVANCE

Weight	Ratio	Version	The first page one page in total	
kg	1:2	B00	Product	MS1H4-40B30CB-D334R-INT-EX d T4

A3