

正样
2026.09.29
300


All rights reserved. Any infringement will be investigated.


Revise	Description

外部公开

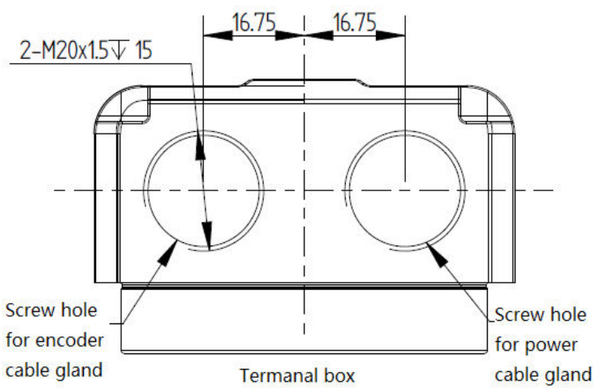


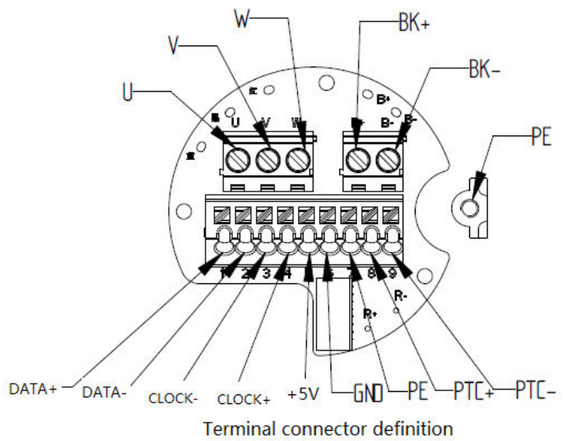


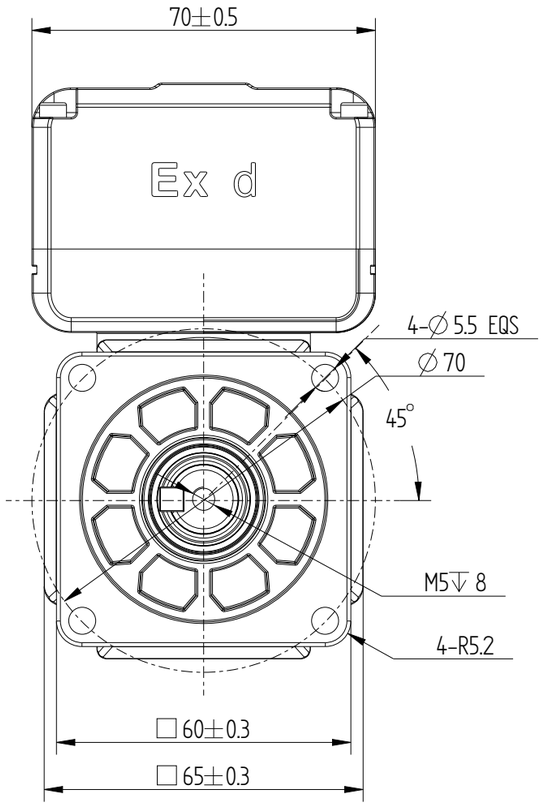


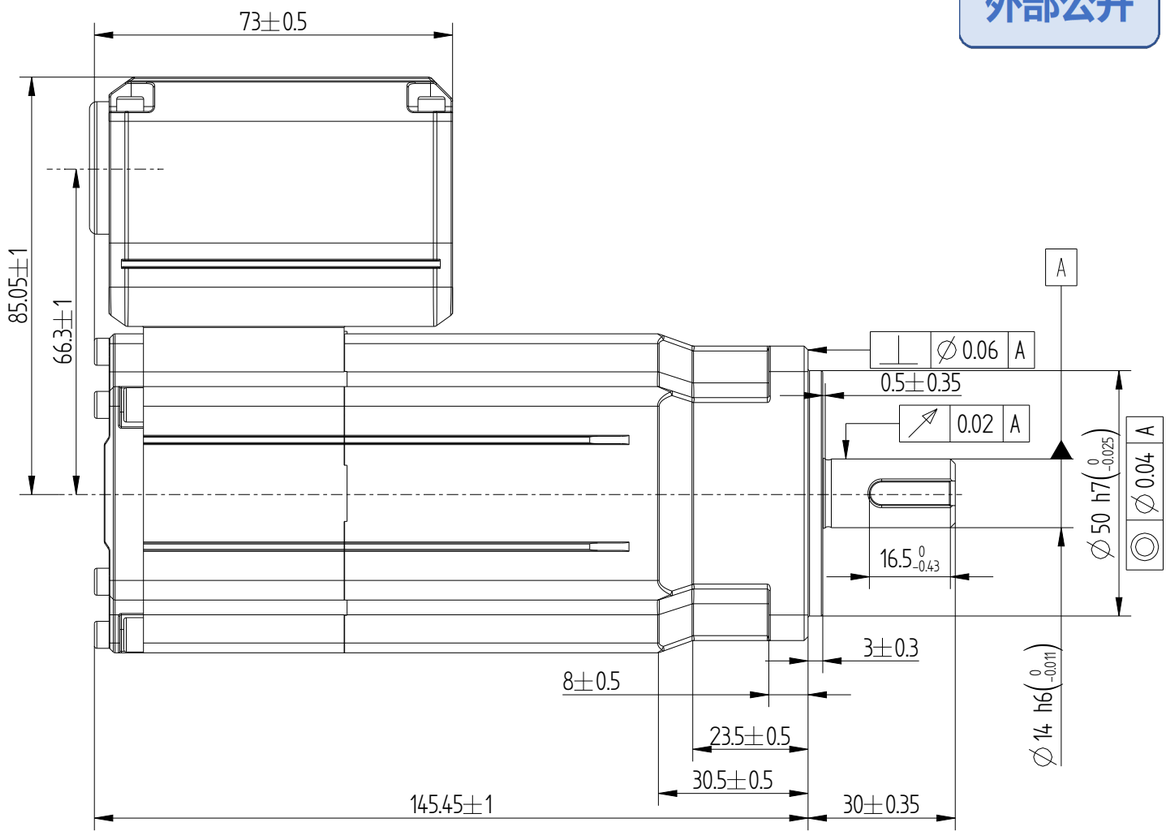


Basic function parameters	
Rated power Kw	0.2
Rated voltage V	220
Rated current A	1.3
Peak current at rated speed A	5.3
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.23±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	≥1.5
Brake power supply V	DC24V±10%
Brake backlash °	≤1
Duty cycle	S1
Radial load N	≤245
Axial load N	≤74

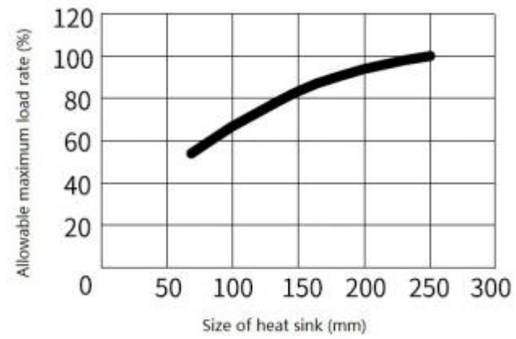

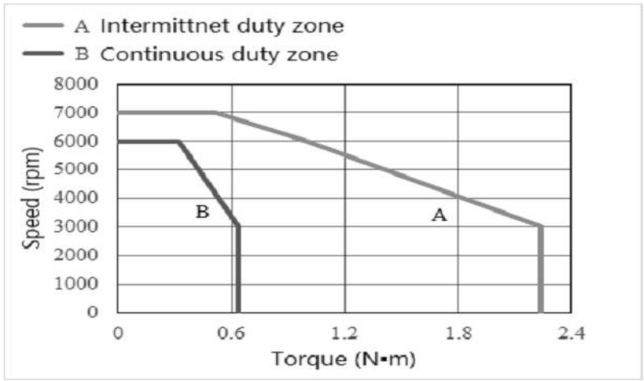




Axial end dimension drawing



Axial end dimension drawing with key

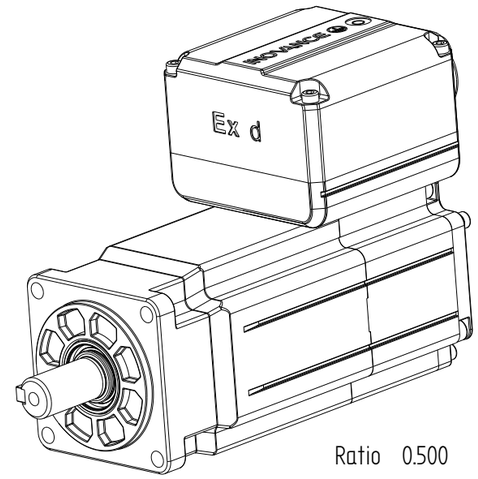

Ratio 0.500

				Outline drawing of the whole machine	0111BK93-WX	
B00	New Archive	/	20260309			
Version	Alter mode	Changer	Date			
Design	/				Projection mark	INOVANCE
Proofread	/			/		
Technological	/					
Check	/			Weight	Ratio	Version
Standardization	/			kg	1:2	B00
Approve	/					

The first page one page in total	
Product	MS1H4-20B30CB-D334R-INT-EX d T4

Inovance Technology Co., Ltd.

A3