

正样
2026.10.09
300


All rights reserved. Any infringement will be investigated


Revise	Description

外部公开

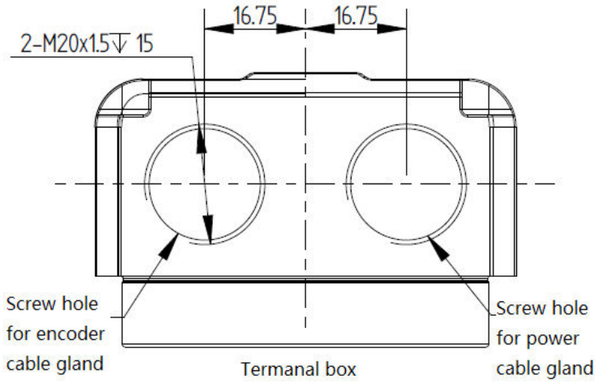


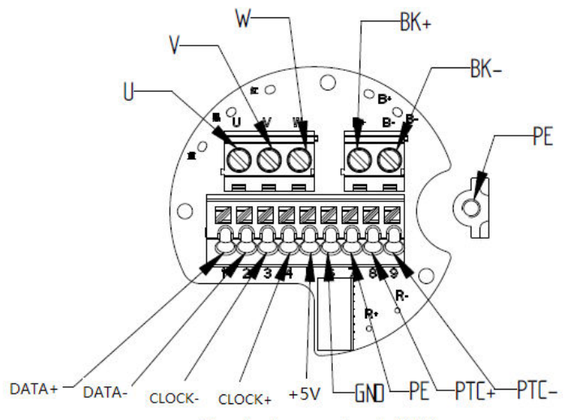


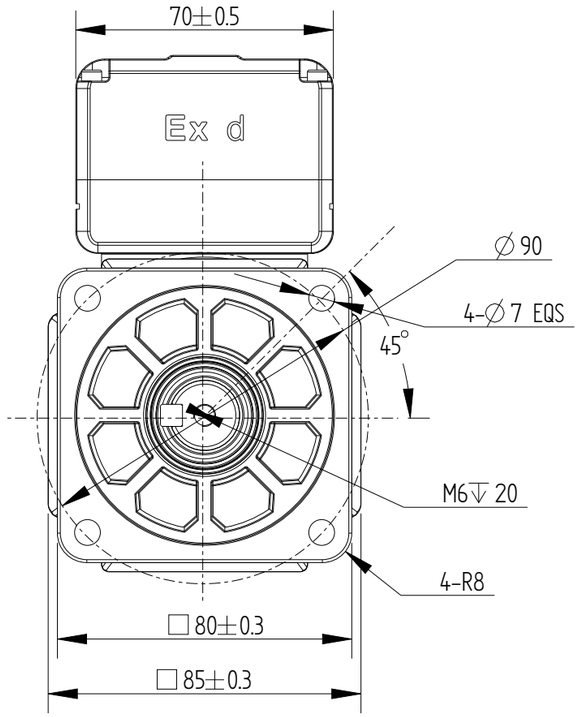


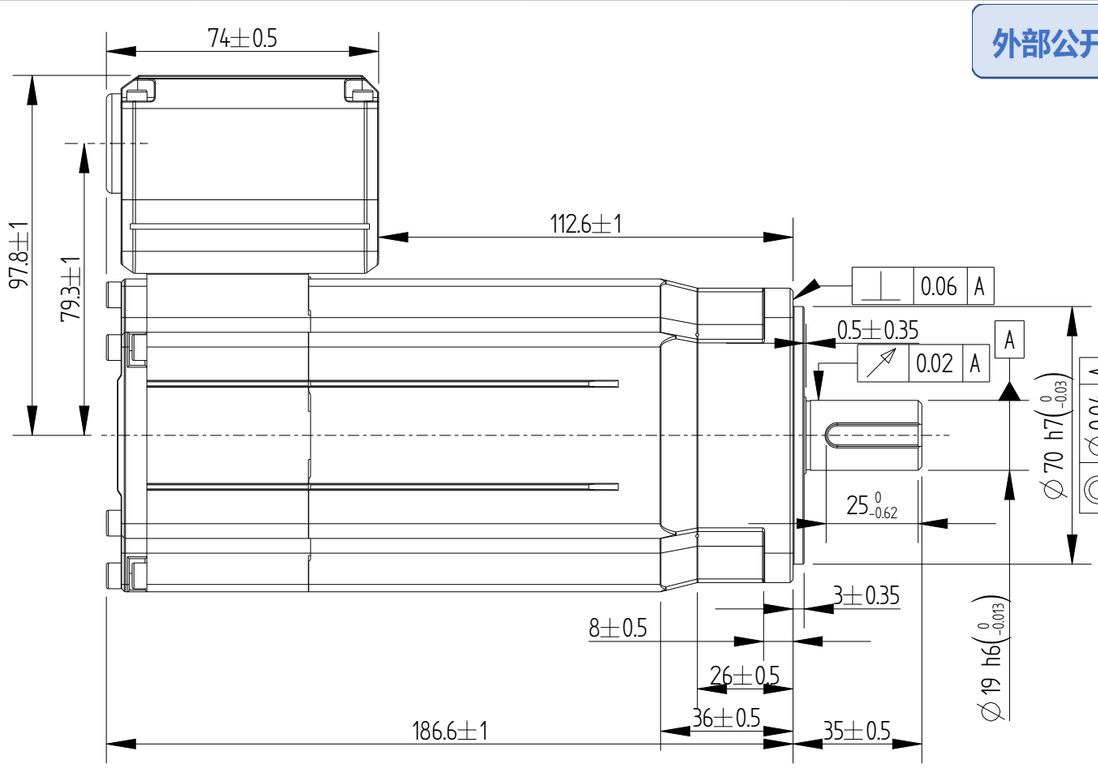


Basic function parameters	
Rated power Kw	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.37
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.55±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	≥3.2
Brake power supply V	DC24V±10%
Brake backlash °	≤1
Duty cycle	S1
Radial load N	≤392
Axial load N	≤147

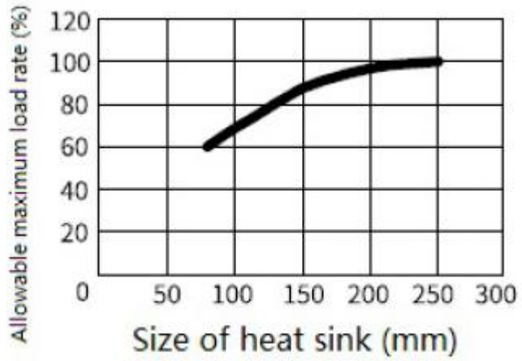

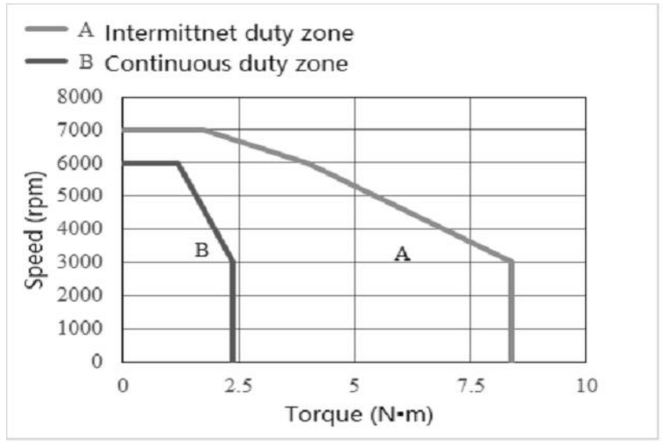




Axial end dimension drawing

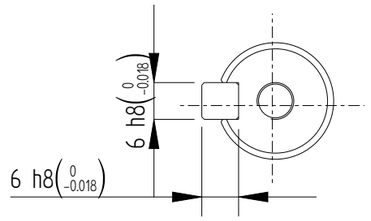

Axial end dimension drawing with key

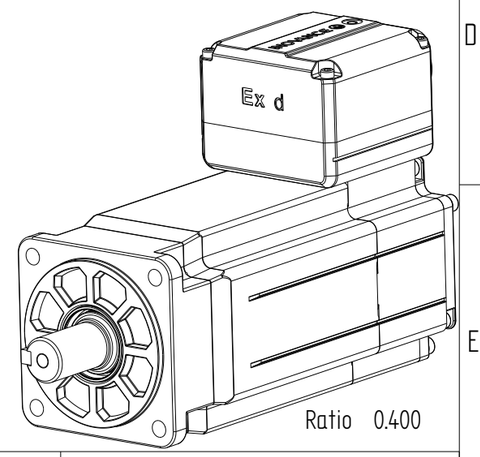

Ratio 0.400

				Outline drawing of the whole machine	0111BK94-wx		
B00	New Archive	/	20260920				
Version	Alter mode	Changer	Date				
Design	/			/	Projection mark	INOVANCE	
Proofread	/						
Technological	/						
Check	/			Weight	Ratio	Version	The first page one page in total
Standardization	/			4.35kg	1:2	B00	Product MS1H4-75B30CB-D334R-INT-EX d T5
Approve	/						

Inovance Technology Co., Ltd.