
正样
2026.09.29
300


All rights reserved. Any infringement will be investigated.

Revise	Description


外部公开

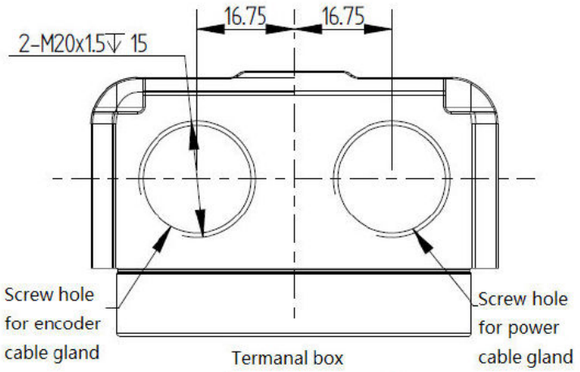



Termanal box

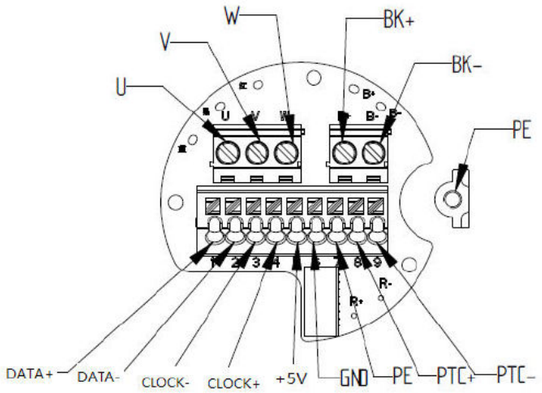


Terminal connector definition

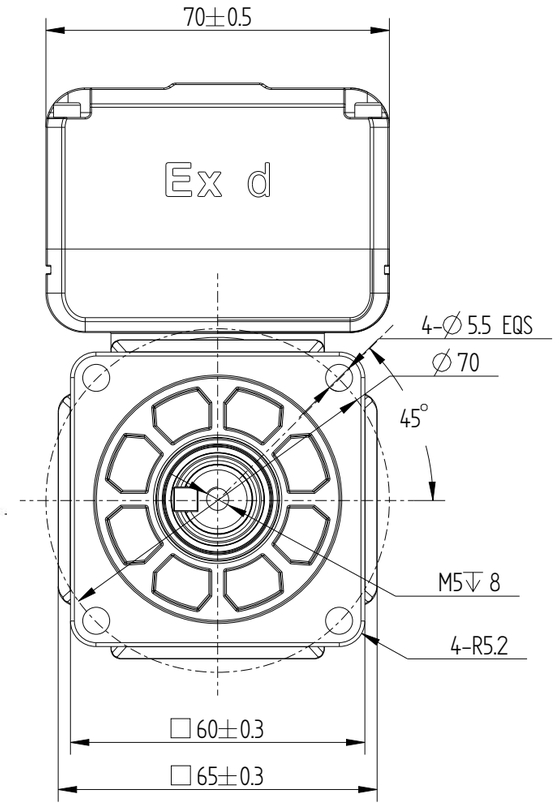


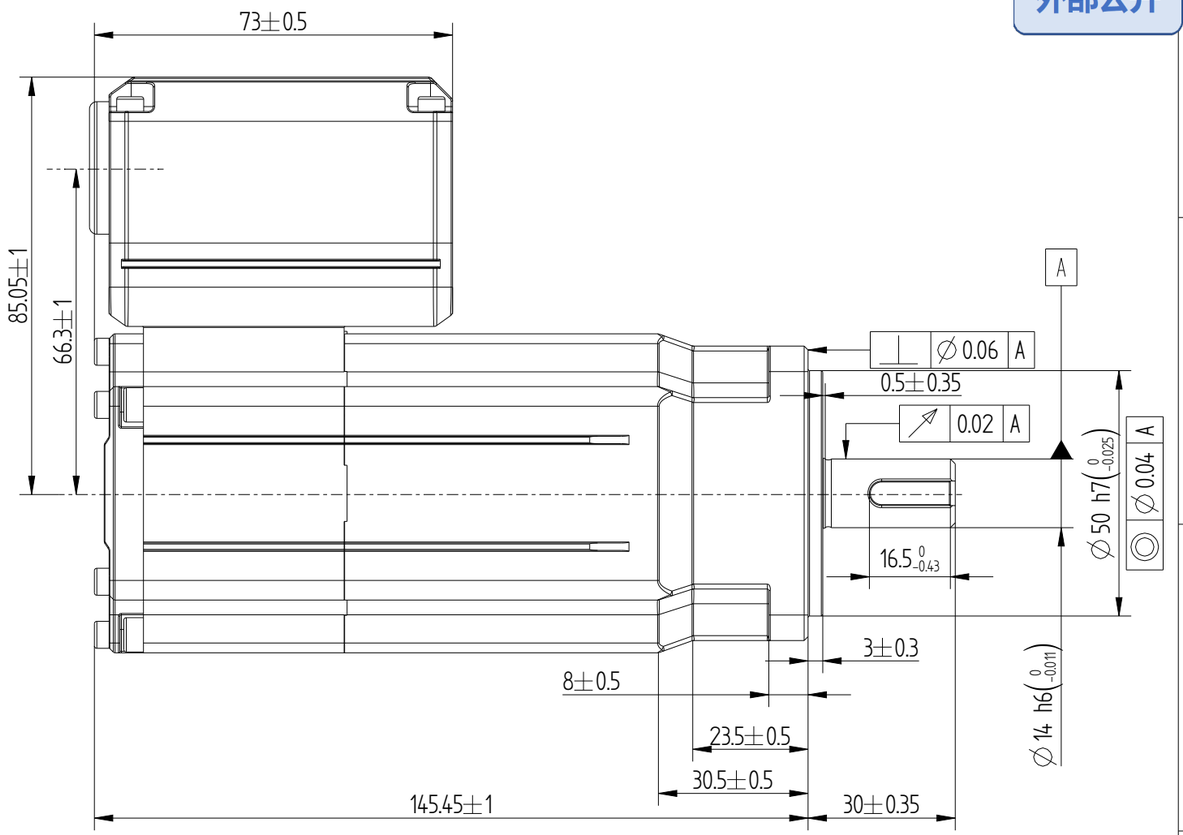

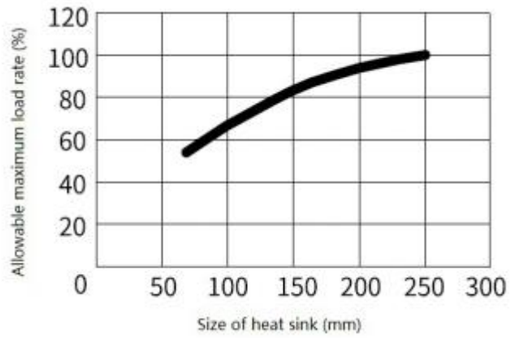




Axial end dimension drawing




Axial end dimension drawing with key

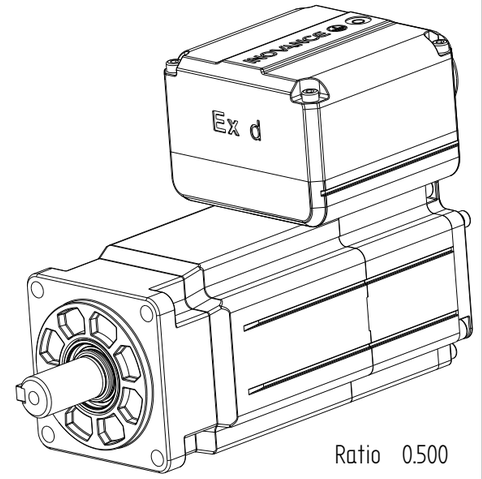

Ratio 0.500

Basic function parameters	
Rated power Kw	0.2
Rated voltage V	220
Rated current A	1.3
Peak current at rated speed A	5.3
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.23±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	⩾1.5
Brake power supply V	DC24V±10%
Brake backlash °	⩽1
Duty cycle	S1
Radial load N	⩽245
Axial load N	⩽74

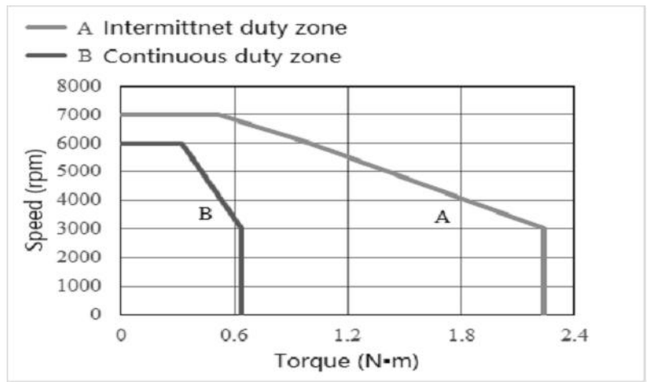

				Outline drawing of the whole machine	0111BK97-WX	
B00	New Archive	/	20260920			
Version	Alter mode	Changer	Date			
Design	/			/	Projection mark	INOVANCE
Proofread	/					
Technological	/					
Check	/			Weight	Ratio	Version
Standardization	/			kg	1:2	B00
Approve	/					

The first page one page in total

Product MS1H4-20B30CB-D334R-INT-EX d T5

Inovance Technology Co., Ltd.

A3