

正样
2026.10.09
300

All rights reserved. Any infringement will be investigated.


外部公开


Revise	Description

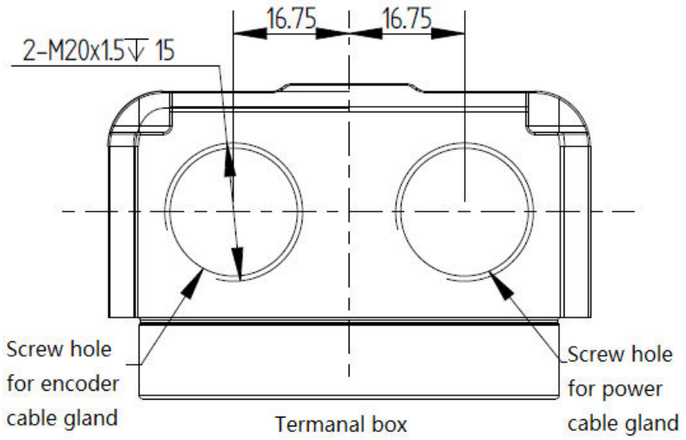

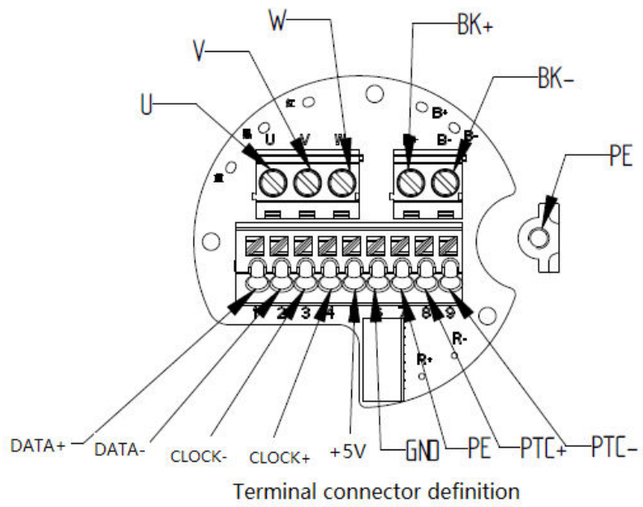



Terminal connector definition

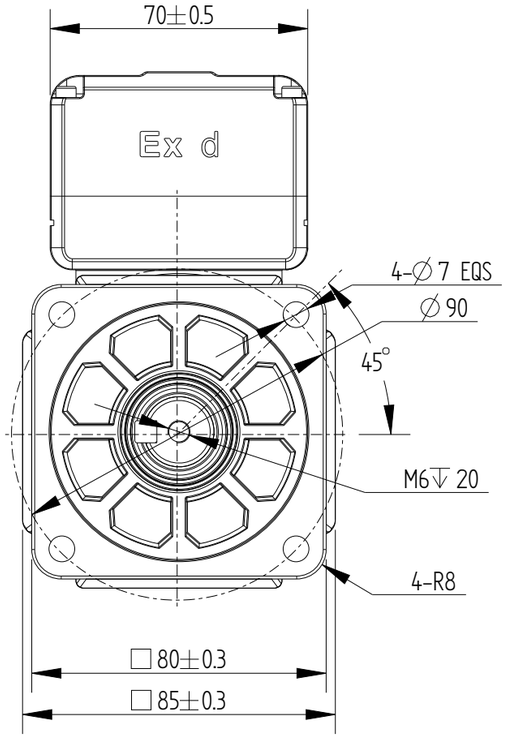


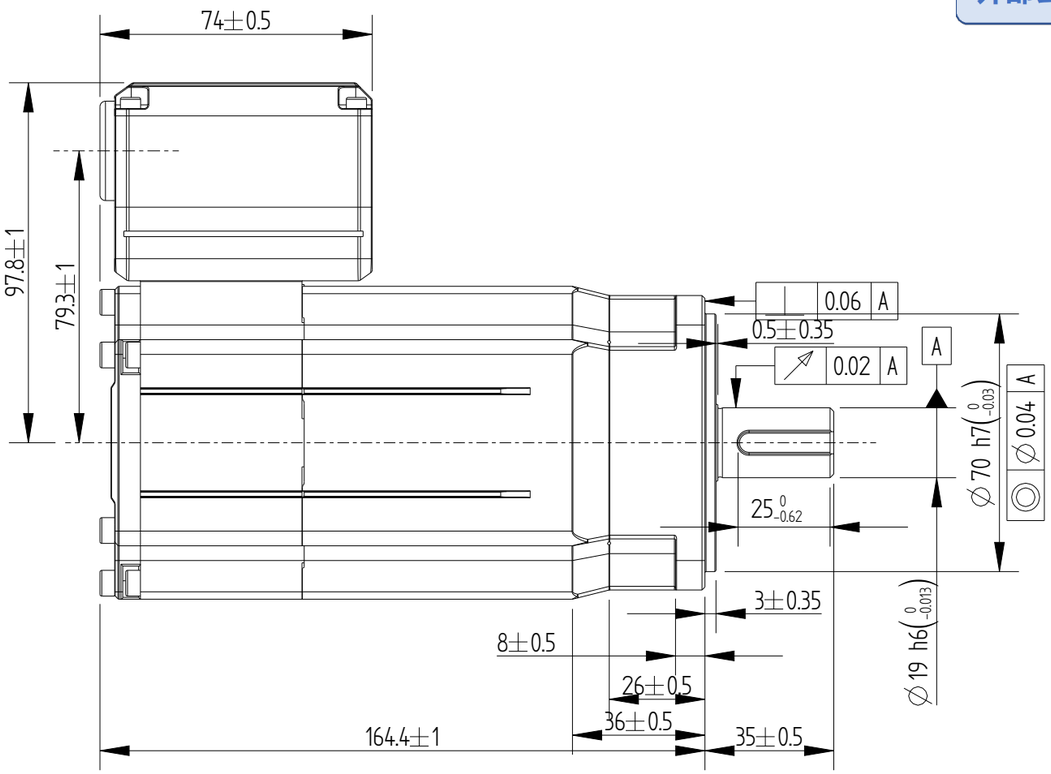


Basic function parameters	
Rated power Kw	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.37
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.52±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash °	/
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

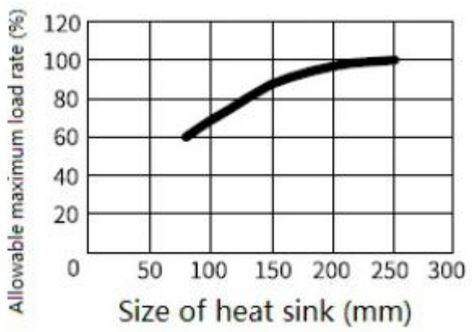

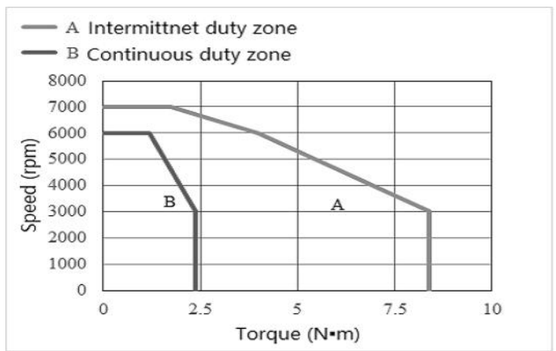

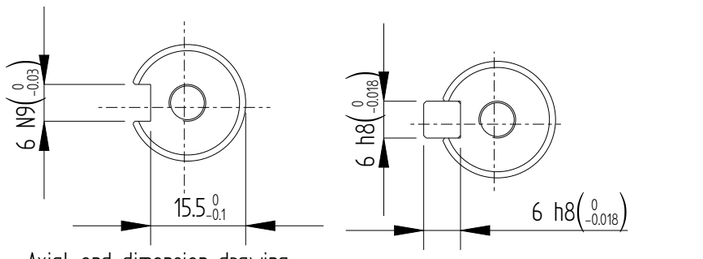

Axial end dimension drawing
Axial end dimension drawing with key

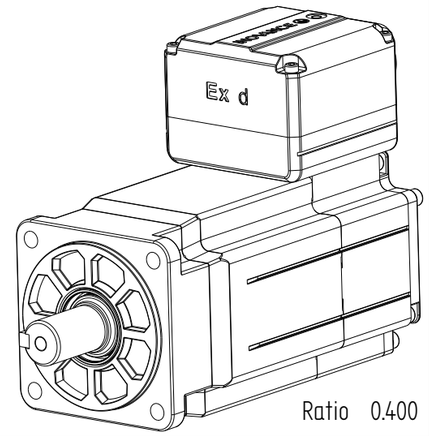

Ratio 0.400

				Outline drawing of the whole machine	0111BK99-wx	
B00	New Archive	/	20260920			
Version	Alter mode	Changer	Date			
Design	/			/	Projection mark	INOVANCE
Proofread	/					
Technological	/					
Check	/			Weight	Ratio	Version
Standardization	/			3.45kg	1:2	B00
Approve	/					

The first page one page in total

Product MS1H4-75B30CB-D331R-INT-EX d T4

Inovance Technology Co., Ltd.

A3