
正样
2026.10.09
300


All rights reserved. Any infringement will be investigated.

Revise	Description


外部公开

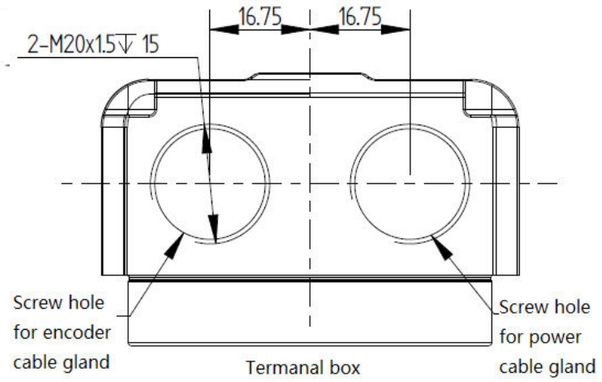


Termanal box

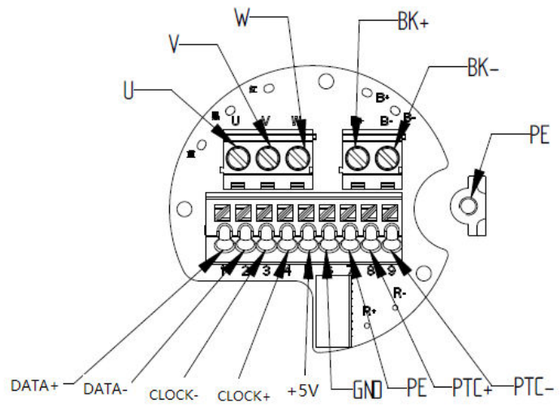



Terminal connector definition

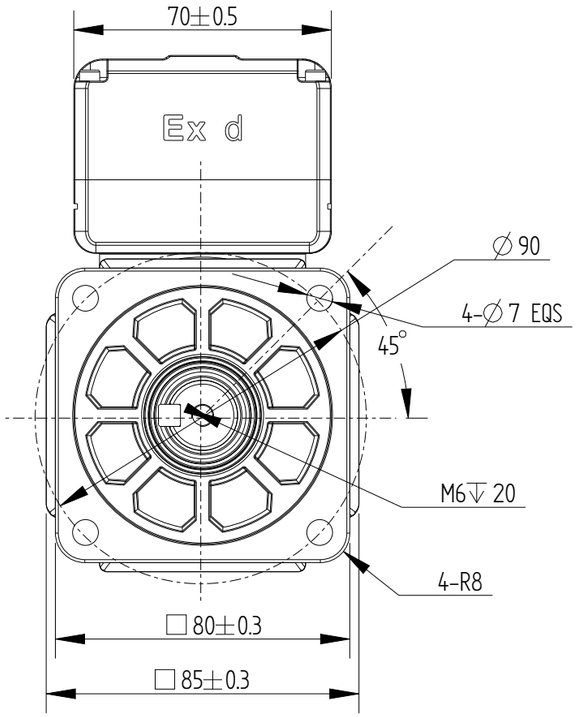


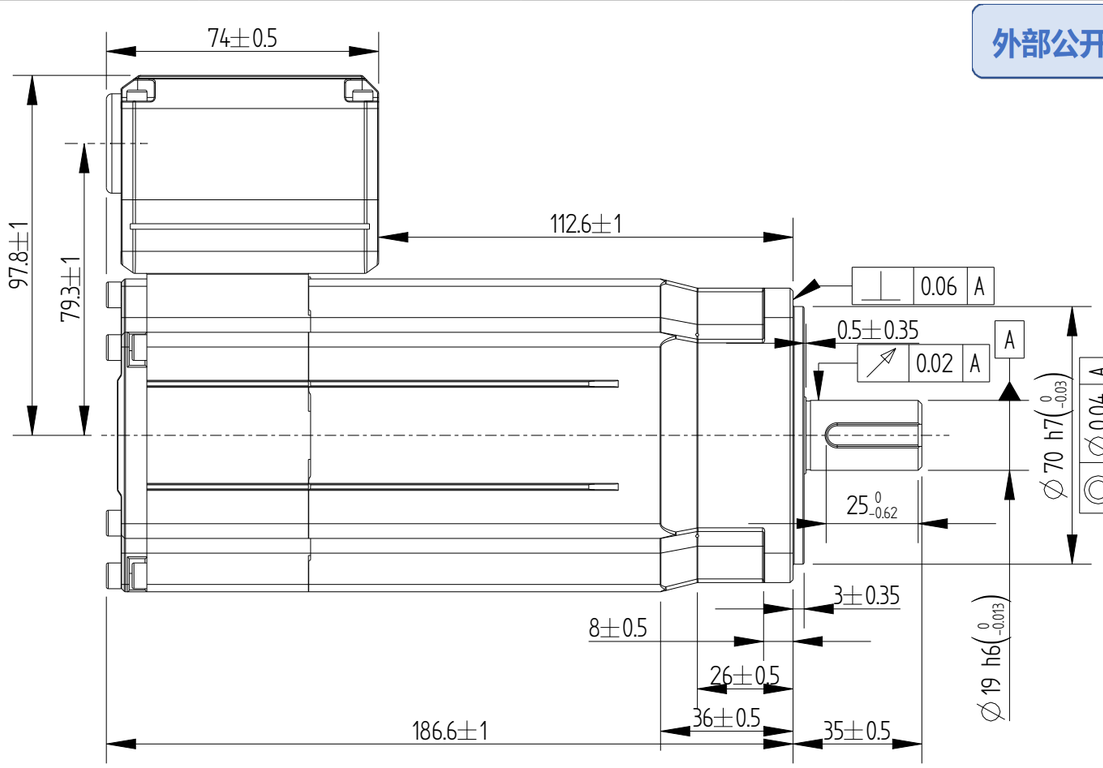


Basic function parameters	
Rated power Kw	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.37
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.55±10%
Encoder resolution	23bit
Insulation Class	F
Protection class	IP66/IP67
Static torque of brake Nm	≥3.2
Brake power supply V	DC24V±10%
Brake backlash °	≤1
Duty cycle	S1
Radial load N	≤392
Axial load N	≤147

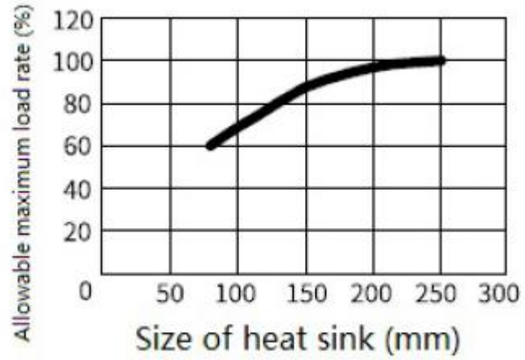

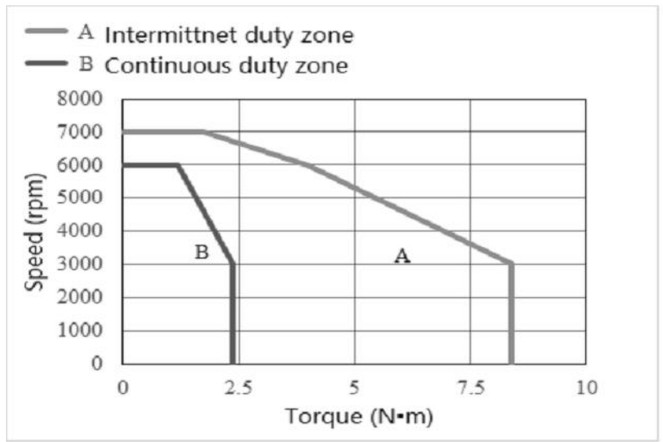




Axial end dimension drawing

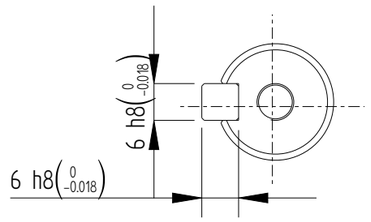

Axial end dimension drawing with key

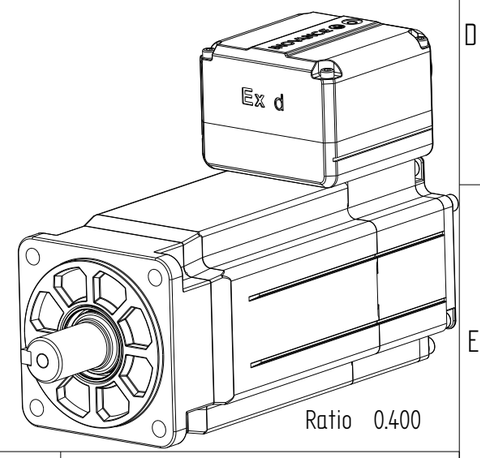

Ratio 0.400

B00	New Archive	/	20260920
Version	Alter mode	Changer	Date
Design	/		
Proofread	/		
Technological	/		
Check	/		
Standardization	/		
Approve	/		

Outline drawing of the whole machine

0111BL27-wx

/

Projection mark

INOVANCE

Weight	Ratio	Version	The first page one page in total	
4.35kg	1:2	B00	Product	MS1H4-75B30CB-D334R-INT-EX d T4

Inovance Technology Co., Ltd.

A3