
正样
2026.04.21
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

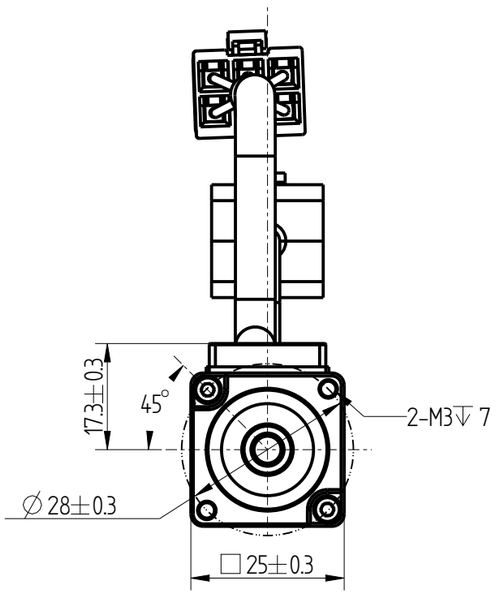

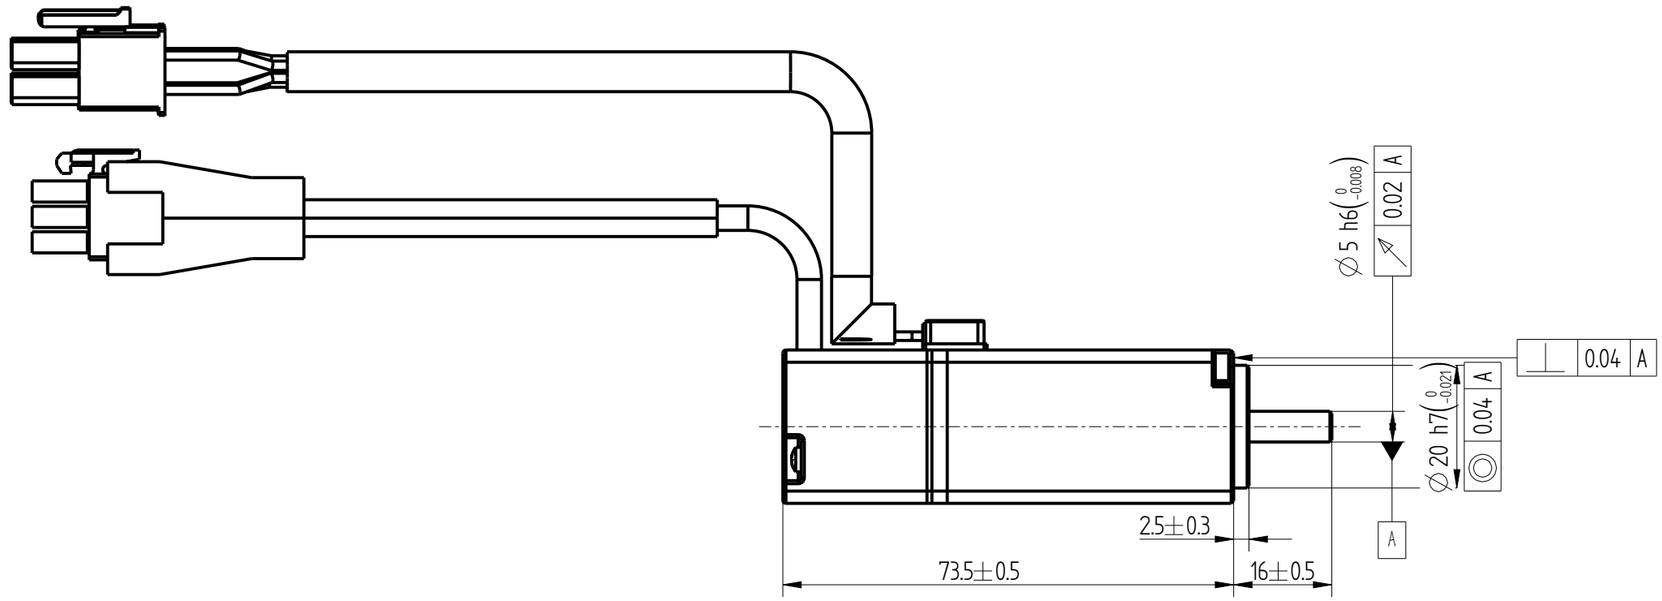

Basic function parameters	
Rated power kW	0.03
Rated voltage V	220
Rated current A	0.93
Peak current at rated speed A	4.2
Rated torque Nm	0.0955
Peak torque at rated speed Nm	0.33
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	0.00668±10%
Encoder resolution	20bit
Insulation class	F(155)
Protection class	IP55
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤44
Axial load N	≤14.5

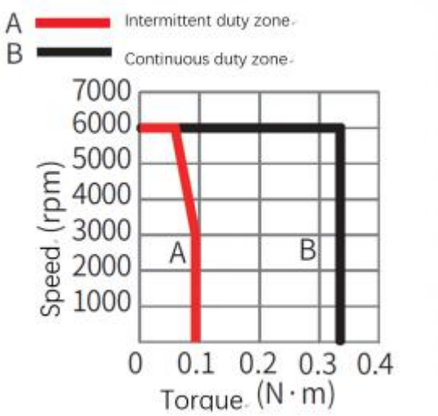

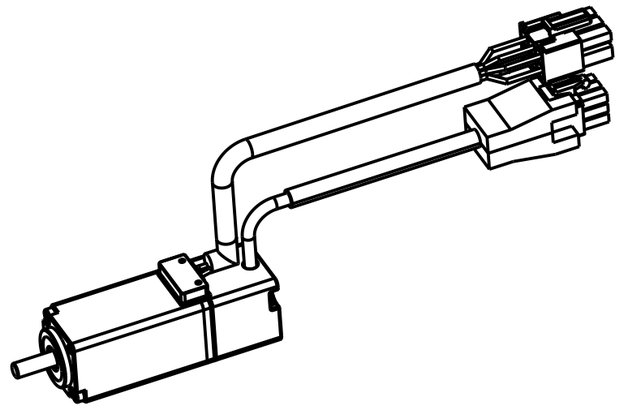

				Motor Outline Drawing	0111BY22-WX	
B00	New Archive	/	20260421			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			0.2kg	1:1	B00
Approve	/					

Page 1 of 1

Model MS1H1-03B30CB-U210R-S-INT

INOVANCE

A3