

正样
2026.08.20
B00

版权所有:侵权必究


外部公开


修订	说明

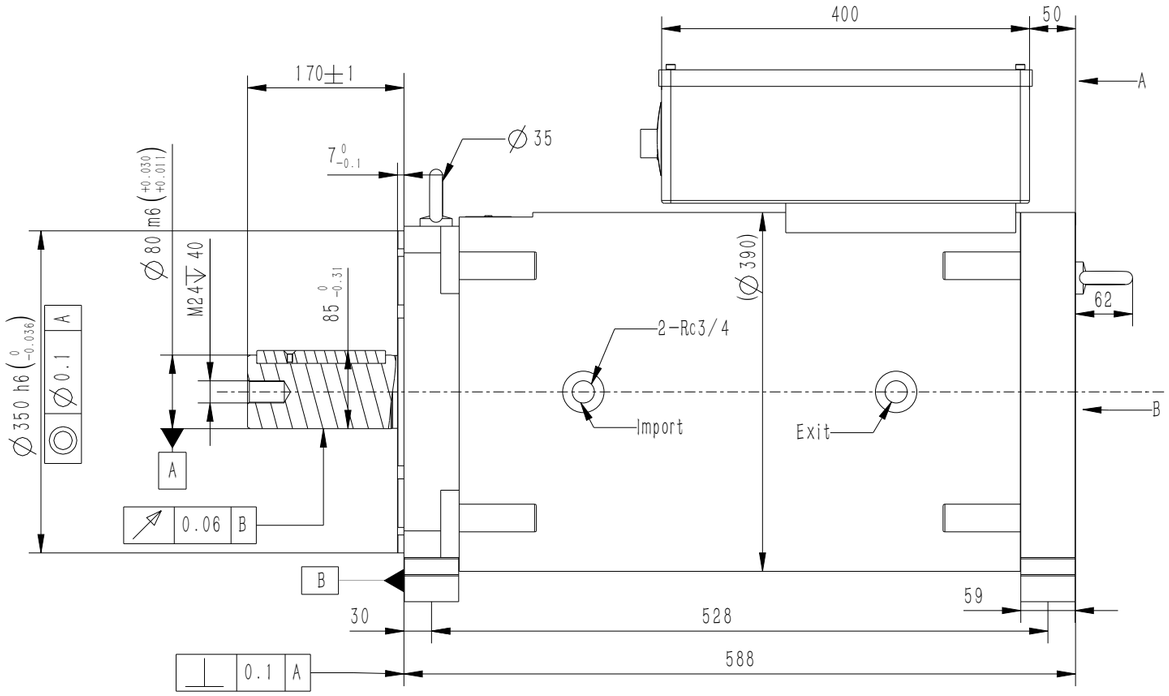





B Direction

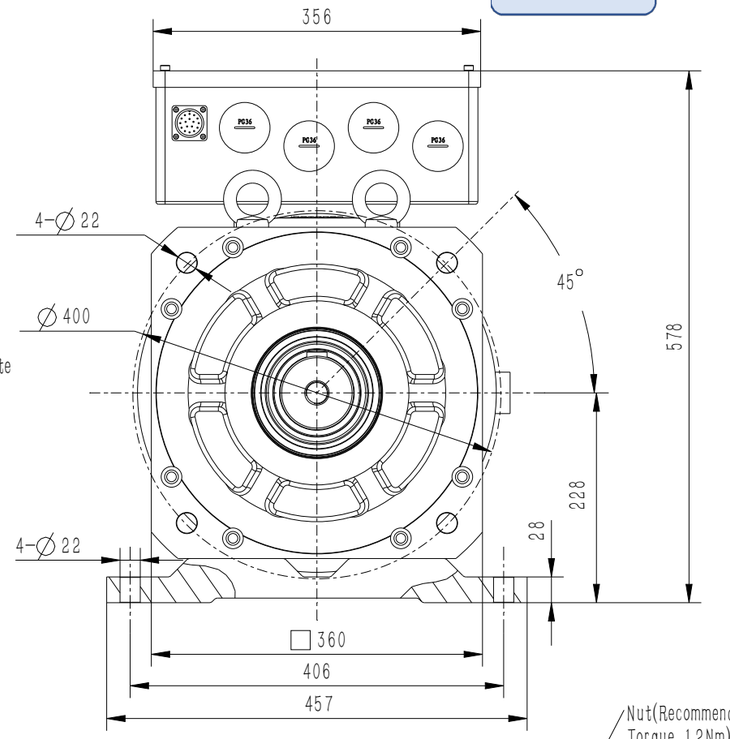

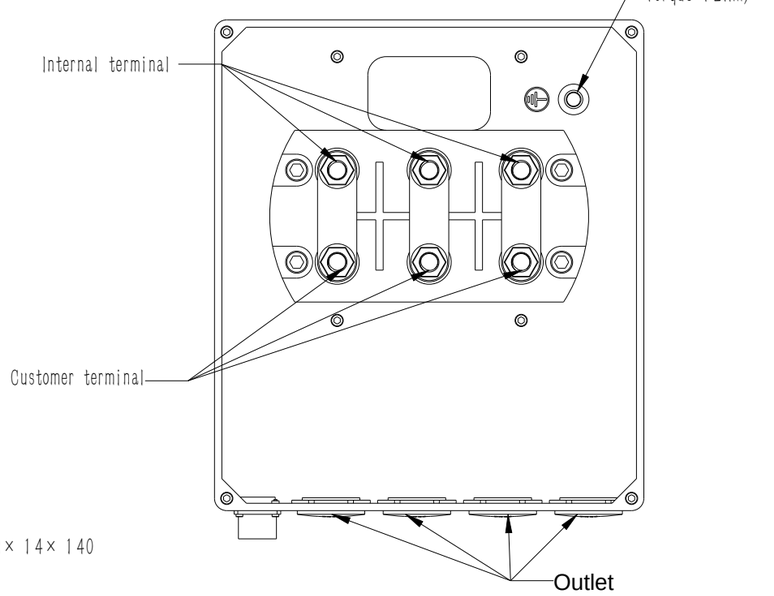


Name	Resolving transformer						PTC		Ground wire	PT1000		
Definition	REF+ Red white	REF− Yellow white	COS+ Red	COS− Black	SIN+ Yellow	SIN− Blue	PTC+ Blue	PTC− Blue	Shielding	PT1000+ Red	PT1000− White	
17PAviation connecto	A	B	C	D	E	F	G	H	J	K	L	

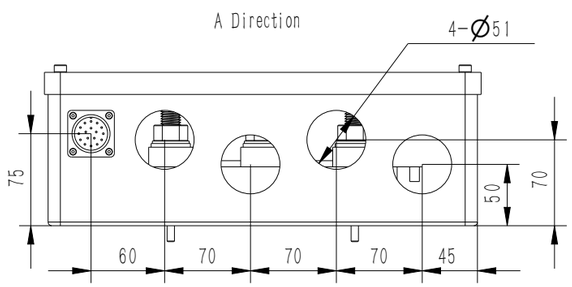

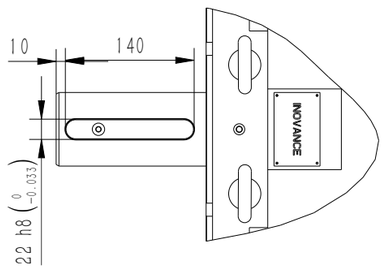

Standard Accessories: Type A Round Head Plain Flat Key 22×14×140
Refer to GB/T 1096

Motor parameters			
Type		Unit value	Value
Work schedule		S1	
Rated torque	Mdn	Nm	900
Rated current	Idn	A	258.5
Rated power	Pdn	Kw	160.2
Rated speed	nM	rpm	1700
Rated frequency	F	Hz	170.00
Peak torque	Mmax	Nm	1800
Peak current	Imax	A	580
Maximum speed	nmax	rpm	2000
Rated voltage	Vn	V	380
Rated efficiency	η	%	96.9
Ke/1000rpm	V	V	200.00
Rotor inertia	/	$kg*cm^2$	4745

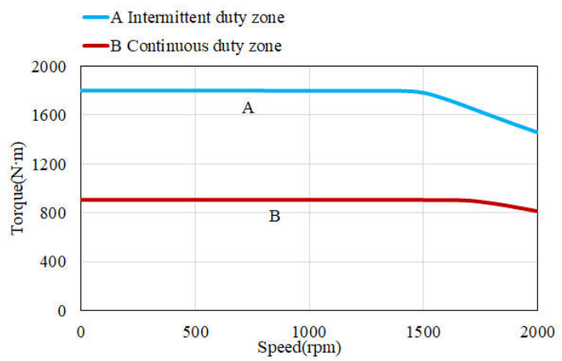

				Motor Outline Drawing	0111C571-WX
B00	新归档	何亮	20260820		
Version	Change method	Changed by	Date		
Design	何亮			/	Mark INOVANCE
Check	姚铜佳				
Craft	孟沙				
Verify	王凡			Weight	Scale / Version / Page 1 Of 1
Standardization	朱秋萍			320kg	1:5 / B00
Approve	庞一龙				Model: MEG36-90B17CD-R1A1L-LQ-INT

苏州汇川技术有限公司

A3