
正样
2026.07.13
B00


Copyright:Copyright infingmengt reserved

外部公开


| Amendment | Description |
|---|---|
| | |


Unit: Millimeter (mm)

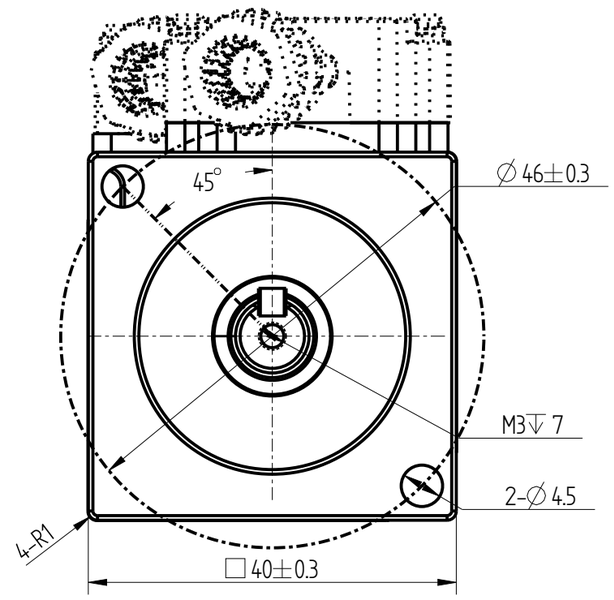

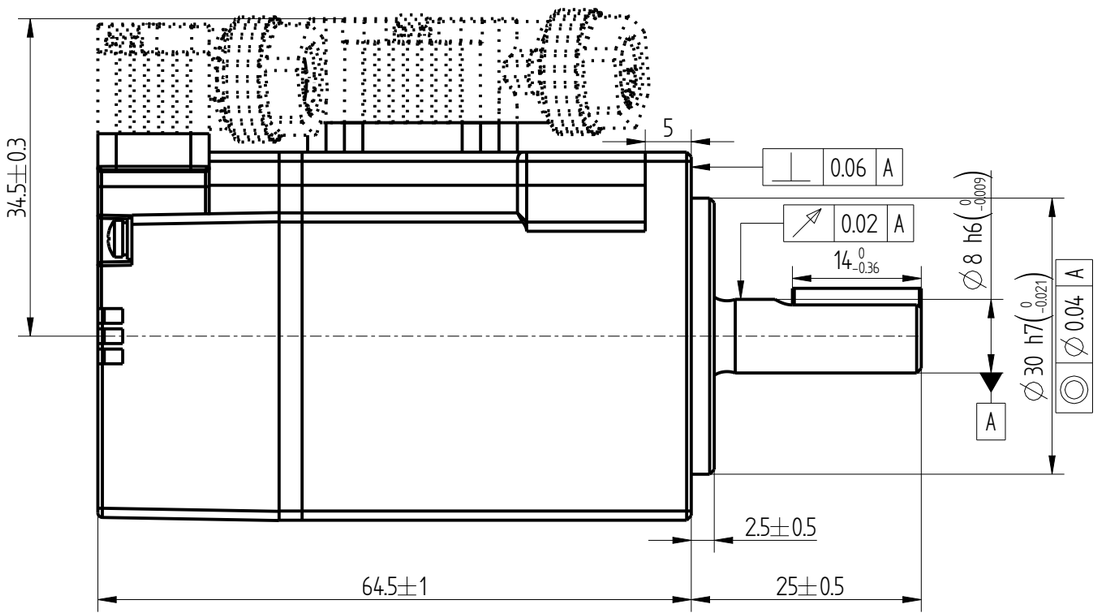


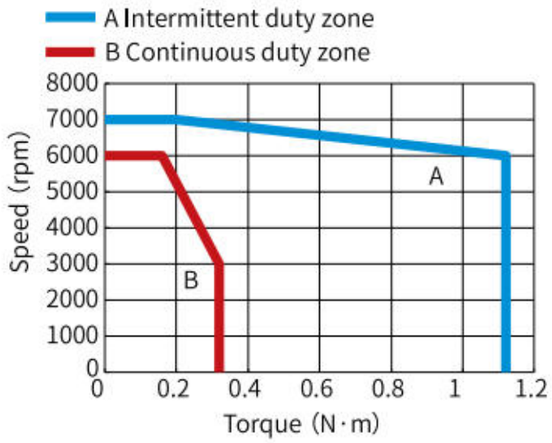

| Basic function parameters | |
|---|---|
| Rated power kW | 0.1 |
| Rated voltage V | 220 |
| Rated current A | 1.27 |
| Peak current at rated speed A | 4.78 |
| Rated torque Nm | 0.32 |
| Peak torque at rated speed Nm | 1.12 |
| Rated speed rpm | 3000 |
| Max speed rpm | 7000 |
| Rotor inertia kg · $cm^2$ | 0.072±10% |
| Encoder resolution | 26 bit |
| Insulation class | F |
| Protection class | IP67 |
| Static torque of brake Nm | / |
| Brake power supply V | / |
| Brake backlash° | / |
| Duty cycle | S1 |
| Radial load N | ≤78 |
| Axial load N | ≤54 |





Keyed shaft end dimension drawing




Shaft end dimensional drawing

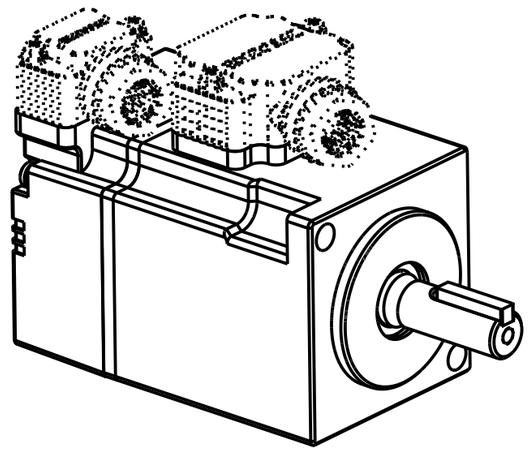

| | | | | | |
|---|---|---|---|---|---|
| | | | | Motor Outline Drawing | 0111CE11-WX |
| | | | | | |
| B00 | Replace | / | 20260629 | | |
| Version | Change method | Changed by | Date | | |
| Design | / | | | / | Mark |
| Check | / | | | | INOVANCE |
| Craft | / | | | | |
| Verify | / | | | Weight / Scale / Version | Page 1 of 1 |
| Standardization | / | | | 0.32kg / 3:2 / B00 | Model: MS1H4-10B30CB-V630R-INT |
| Approve | / | | | | |