
正样
2026.07.13
B00


Copyright:Copyright infingmengt reserved

外部公开


Amendment	Description


Unit: Millimeter (mm)

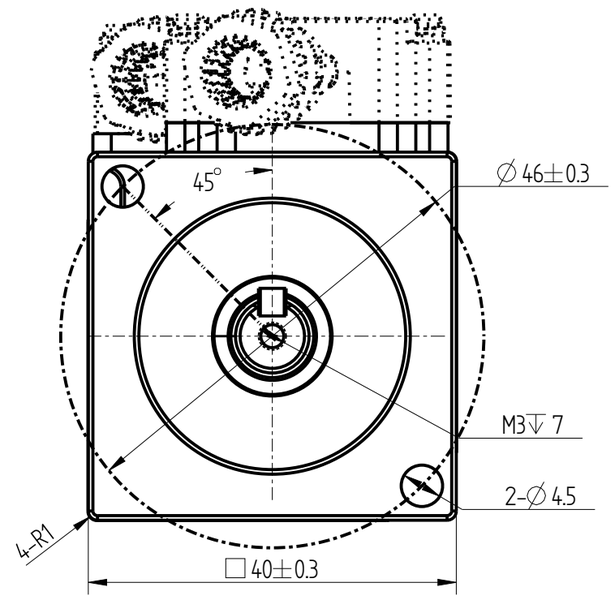

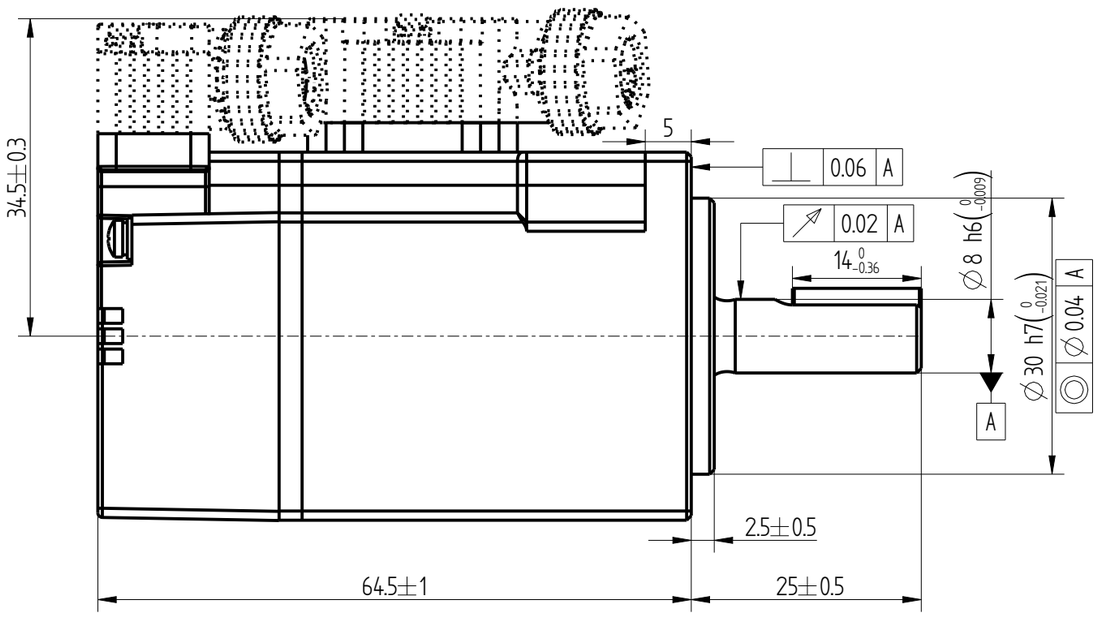


Basic function parameters	
Rated power kW	0.1
Rated voltage V	220
Rated current A	1.27
Peak current at rated speed A	4.78
Rated torque Nm	0.32
Peak torque at rated speed Nm	1.12
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm^2	0.072±10%
Encoder resolution	23 bit
Insulation class	F
Protection class	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤78
Axial load N	≤54

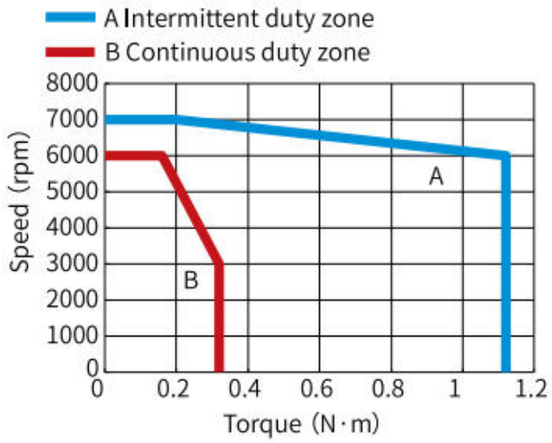




Keyed shaft end dimension drawing



Shaft end dimensional drawing

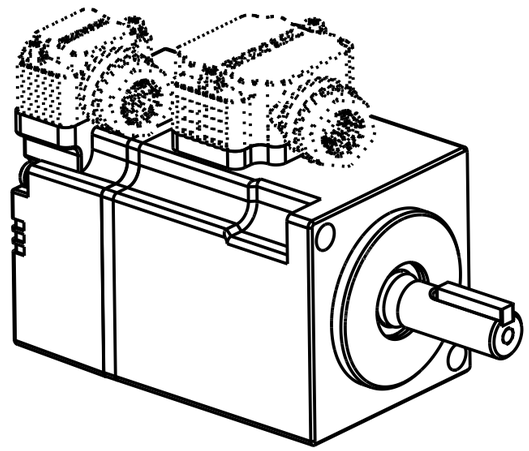

				Motor Outline Drawing	0111CE20-WX
B00	Replace	/	20260629		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				INOVANCE
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
Standardization	/			0.32kg / 3:2 / B00	Model: MS1H4-10B30CB-V330R-INT
Approve	/				

INOVANCE

A3