
正样
2026.07.13
B00


Copyright:Copyright infingmengt reserved


Amendment	Description

外部公开


Unit: Millimeter (mm)

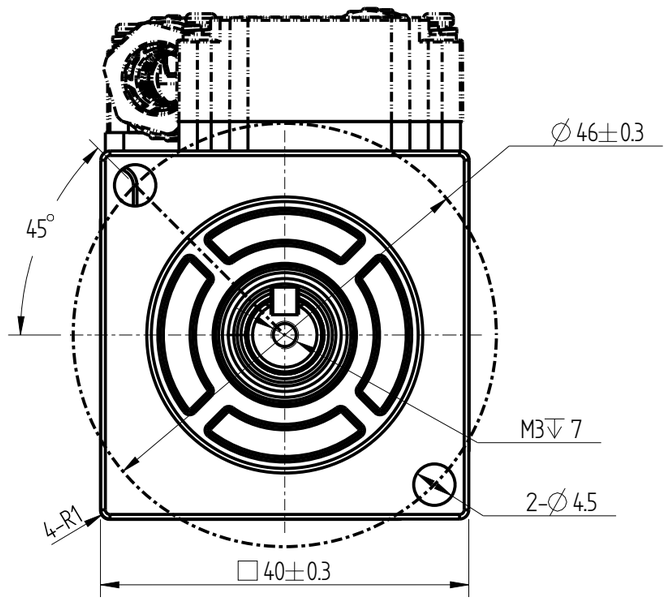

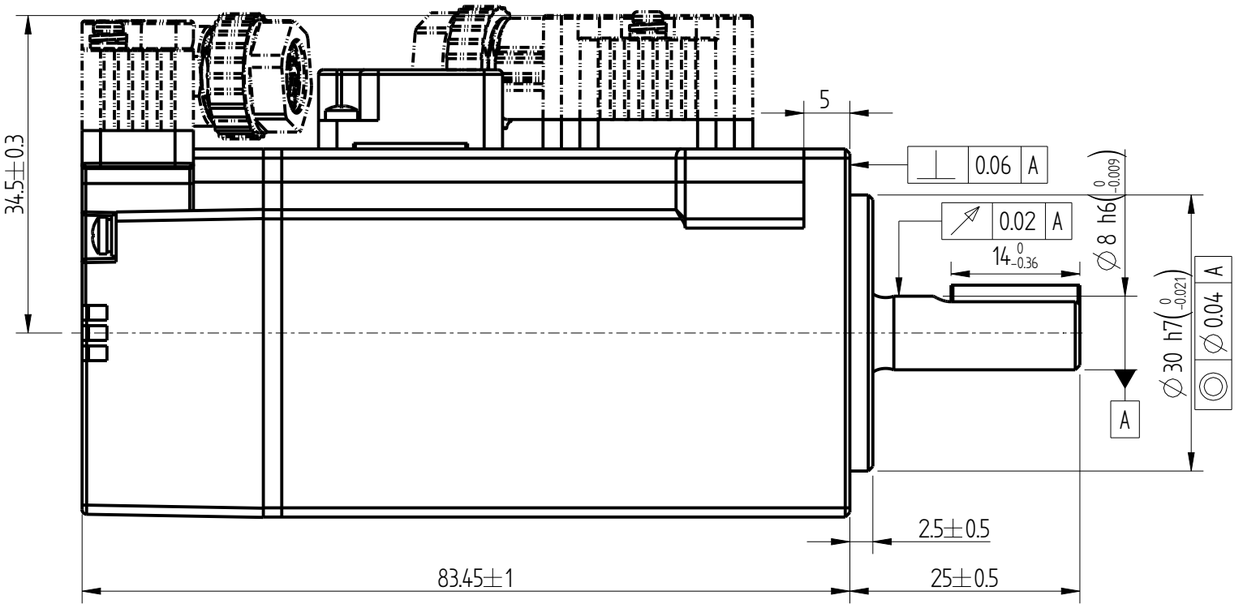





Shaft end dimensional drawing



Keyed shaft end dimension drawing

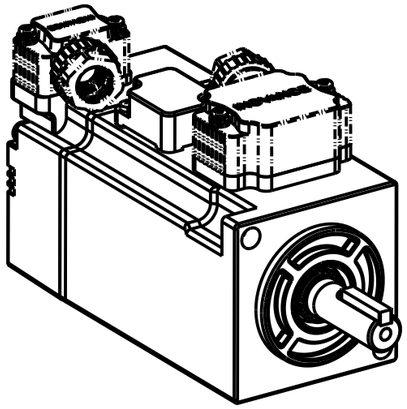

Basic function parameters	
Rated power kW	0.05
Rated voltage V	220
Rated current A	1.27
Peak current at rated speed A	4.78
Rated torque Nm	0.16
Peak torque at rated speed Nm	0.56
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm^2	0.04±10%
Encoder resolution	26 bit
Insulation class	F
Protection class	IP67
Static torque of brake Nm	⩾0.32
Brake power supply V	DC24±10%
Brake backlash°	⩽1.5
Duty cycle	S1
Radial load N	⩽78
Axial load N	⩽54

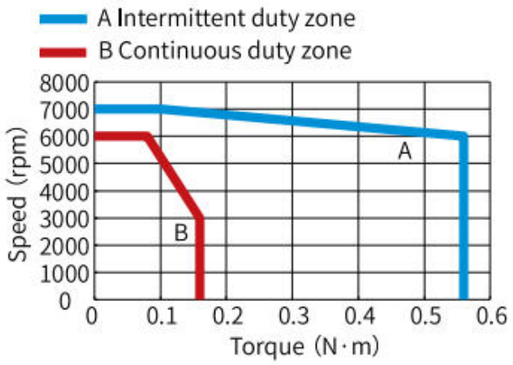

				Motor Outline Drawing	0111CE30-WX	
B00	Replace	/	20260629			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			0.42kg	3:2	B00
Approve	/					

Page 1 of 1

Model MS1H4-05B30CB-V634R-INT

INOVANCE

A3