
正样
2026.07.13
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开

Unit: Millimeter (mm)

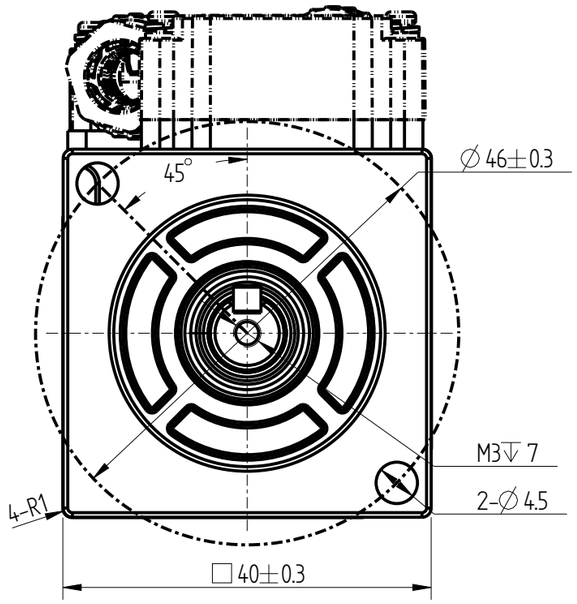


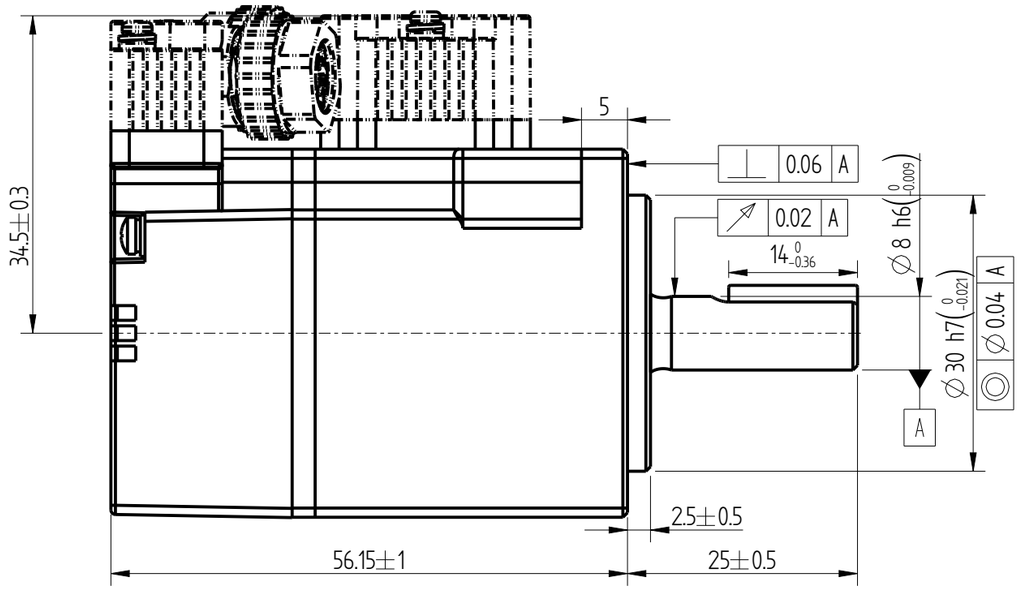


Basic function parameters	
Rated power kW	0.05
Rated voltage V	220
Rated current A	1.27
Peak current at rated speed A	4.78
Rated torque Nm	0.16
Peak torque at rated speed Nm	0.56
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm²	0.038±10%
Encoder resolution	26 bit
Insulation class	F
Protection class	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤78
Axial load N	≤54




Keyed shaft end dimension drawing



Shaft end dimensional drawing

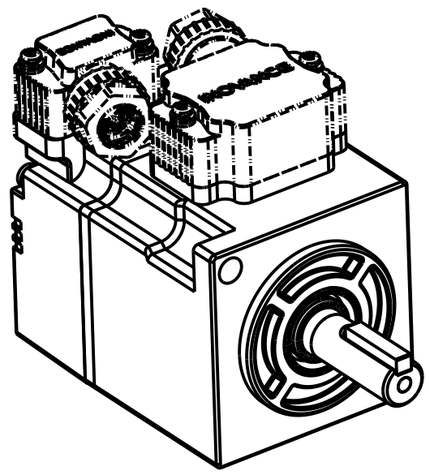

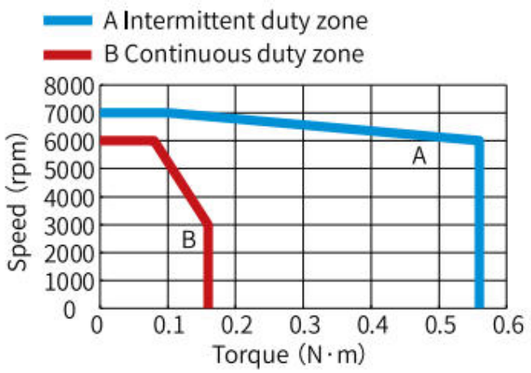

				Motor Outline Drawing	0111CE32-WX
B00	Replace	/	20260629		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				INOVANCE
Craft	/				
Verify	/			Weight	Scale / Version / Page 1 of 1
Standardization	/			0.26kg	3:2 / B00 / Model: MS1H4-05B30CB-V631R-INT
Approve	/				

INOVANCE

A3