
正样
2026.07.13
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

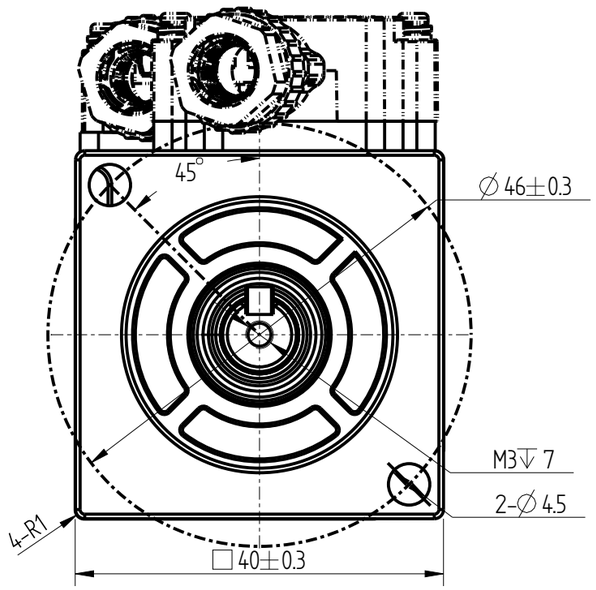

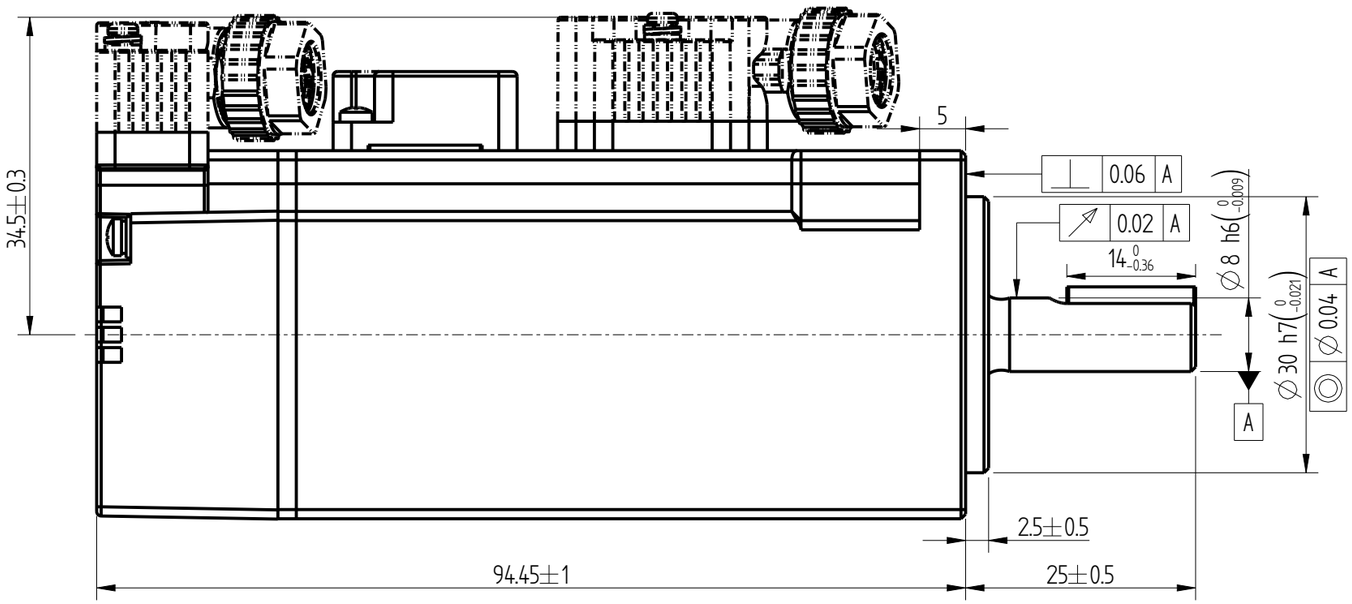


Basic function parameters	
Rated power kW	0.1
Rated voltage V	220
Rated current A	1.27
Peak current at rated speed A	4.78
Rated torque Nm	0.32
Peak torque at rated speed Nm	1.12
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm^2	0.074±10%
Encoder resolution	26 bit
Insulation class	F
Protection class	IP67
Static torque of brake Nm	⩾0.32
Brake power supply V	DC24±10%
Brake backlash°	⩽1.5
Duty cycle	S1
Radial load N	⩽78
Axial load N	⩽54

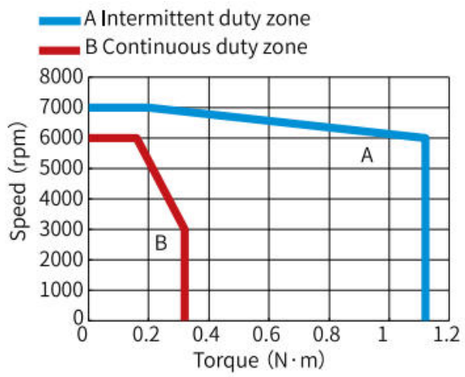




Shaft end dimensional drawing



Shaft end dimensional drawing

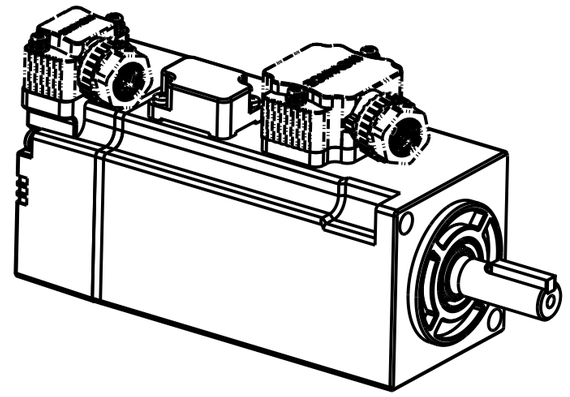

				Motor Outline Drawing		0111CE33-WX	
B00	Replace	/	20260629				
Version	Change method	Changed by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			0.5kg	3:2	B00	Model MS1H4-10B30CB-V634R-INT
Approve	/						

INOVANCE

A3